

B-1

B-2

B-3

B-4

B-5



Spool Valve motors incorporate the proven orbit motor principle to provide high torque at low speeds.

Spool Valve Motors



Highlights

Product Description

Char-Lynn spool valve motors distribute pressurized fluid into and out of the Orbit gear set (Gerotor or Geroler) via valve slots integrated into the output shaft. The spool valve motors incorporate both valving and hydrodynamic journal bearings into a common shaft design. The valve section (spool valve) can be optimized for low flow, low speed needs using a low speed spool option to enhance smooth running performance.

These motors incorporate the proven orbit motor principle to provide high torque at low speeds.

Motor shaft rotation can be instantly reversed by changing direction of input/output flow while generating equal torque in either direction. The displacements available provide a wide variety of speeds and torques from any spool valve motor series.

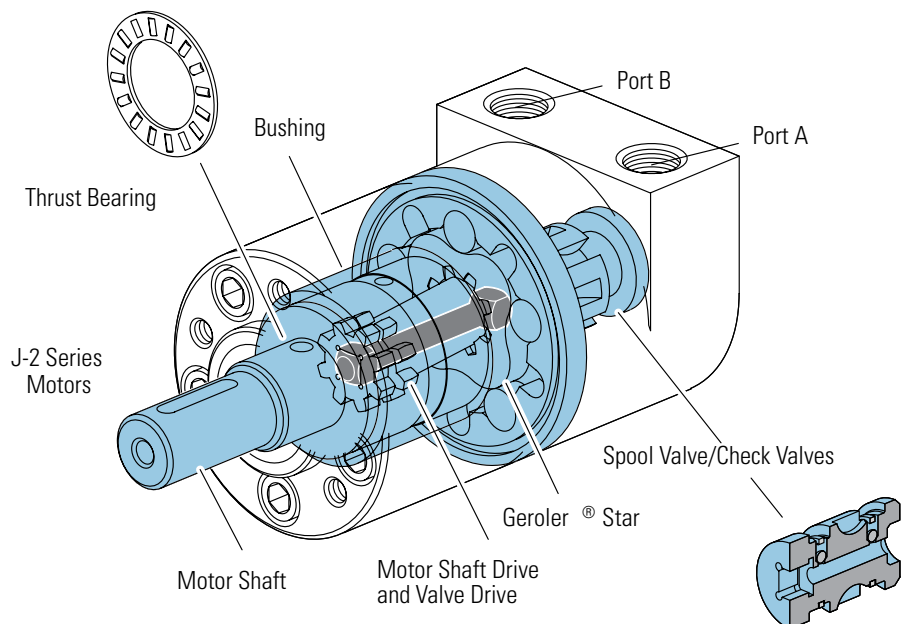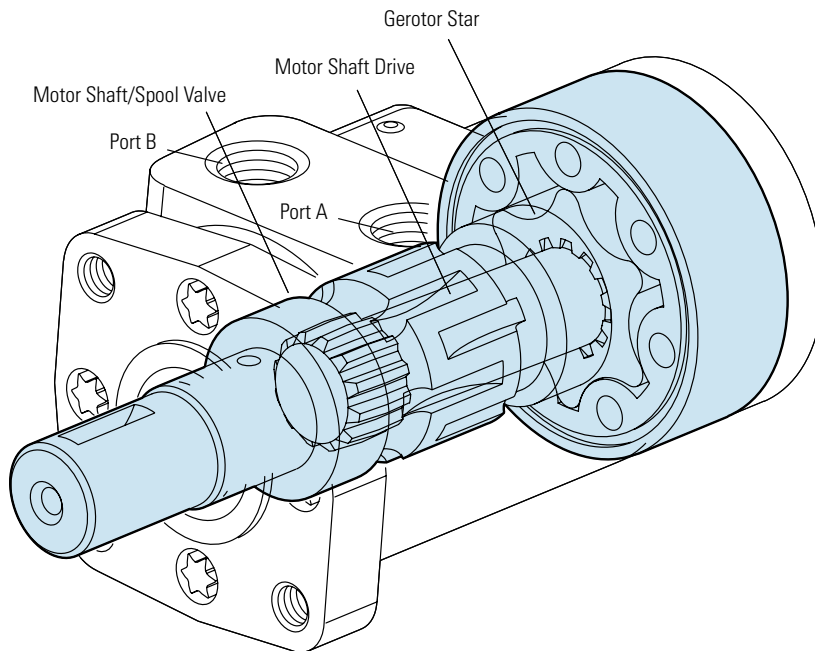

Features, Benefits, and Applications

B-1

B-2

B-3

B-4

B-5

Features

- Proven Orbit Motor Principle
- Hydrodynamic Journal Bearings
- Constant Clearance Geroler
- Three-Zone Pressure Design
- Reduced drive running-angle
- High-pressure seals
- Modular design

Benefits

- Compact, powerful package
- Infinite bearing life (at rated loads)
- High efficiency
- Increases shaft seal & bearing life
- Smooth operation, increases drive life
- Reduces leakage
- Design flexibility
- Economically tailored solutions

Applications

- Harvesters
- Augers
- Spreaders
- Machine tools
- Conveyors
- Winches
- Turf care equipment
- Food processing
- Aerial Work Platforms
- Anywhere a compact drive with high output torque is needed

Design Features

Spool valve technology is typically used where compact, economical solutions are most needed. Spool valve motors use a spool valve to precisely time and control flow through the orbit gear set (Gerotor or Geroler). Inlet flow is directed into and out of the orbit set via slots in the spool and passages through the motor housing. The result is a very cost-effective compact package suited to many application requirements. The three

primary components in the motor are the orbit star, drive and output shaft. H, S and T Series incorporate the spool valve and hydrodynamic bearings in the motor shaft. The W series is similar except a ball bearing is used for the front bearing for increased side-load capacity. Due to its compact size and high speed capability, the J Series is unique and utilizes a separate dedicated spool and spool valve drive. All motors utilize Eaton's

constant-clearance Geroler technology except the H Series, which continues to use the time-proven H motor gerotor set. These motors all use a three-zone pressure design consisting of three unique pressure areas: 1) inlet, 2) return, 3) case. This provides the capability to limit motor case pressure and allows the use of several case pressure options for extended shaft seal and thrust bearing life.

Below is a quick-guide to help select the proper motor for your application:

MOTOR QUICK-GUIDE (BASED ON MAXIMUM CONTINUOUS RATINGS)

Series	Output Torque Nm [lb-in]	Pressure bar [psi]	Flow lpm [gpm]	Side Load kg [lbs]
J Series	62 [550]	140 [2030]	21 [5.5]	196 [430]
H Series	407 [3607]	124 [1800]	57 [15]	635 [1400]
S Series	430 [3800]	135 [2000]	55 [15]	635 [1400]
T Series	450 [4000]	155 [2250]	55 [15]	635 [1400]
W Series	410 [3625]	165 [2400]	68 [18]	845 [1900]

* The above are provided as guidelines only. Actual ratings vary depending on final motor configuration

Table of Contents

Highlights	B-ii
Features, Benefits, and Applications	B-iii

J Series (129-)

Highlights	B-1-1
Specifications	B-1-2
Performance Data	B-1-3
Dimensions	B-1-5
Product Numbers	B-1-9
Shaft Side Load Capacity	B-1-10
Case Pressure and Case Drain	B-1-11
Model Code	B-1-12

H Series (101-)

Highlights	B-2-1
Specifications	B-2-2
Performance Data	B-2-3
Dimensions	B-2-9
Product Numbers	B-2-10
Model Code	B-2-11

S Series (103-)

Highlights	B-3-1
Specifications	B-3-2
Performance Data	B-3-3
Dimensions	B-3-8
Product Numbers	B-3-9
S Series with Low Speed Valving	B-3-10
Model Code	B-3-11

T Series (158-)

Highlights	B-4-1
Specifications	B-4-2
Performance Data	B-4-3
Dimensions	B-4-8
Product Numbers	B-4-9
Model Code	B-4-10

T Series with Parking Brake (185-)

Highlights	B-4-11
Application Information	B-4-12
Specifications	B-4-13
Dimensions	B-4-14
Brake Release and Motor Case Pressure	B-4-15
Product Numbers	B-4-16
Model Code	B-4-17

H, S and T Series (101-, 103-, 158-, 185-)

Side Load Capacity	B-4-18
Dimensions	B-4-19
Mounting Options	B-4-21

W Series (162-)


Highlights	B-5-1
Specifications	B-5-2
Performance Data	B-5-3
Dimensions	B-5-5
Dimensions Shafts	B-5-6
Shaft Side Load Capacity	B-5-7
Model Code	B-5-8

W Series with Parking Brake (162-)

Dimensions	B-5-9
Product Numbers	B-5-10
Model Code	B-5-11

J Series (129-)

Highlights

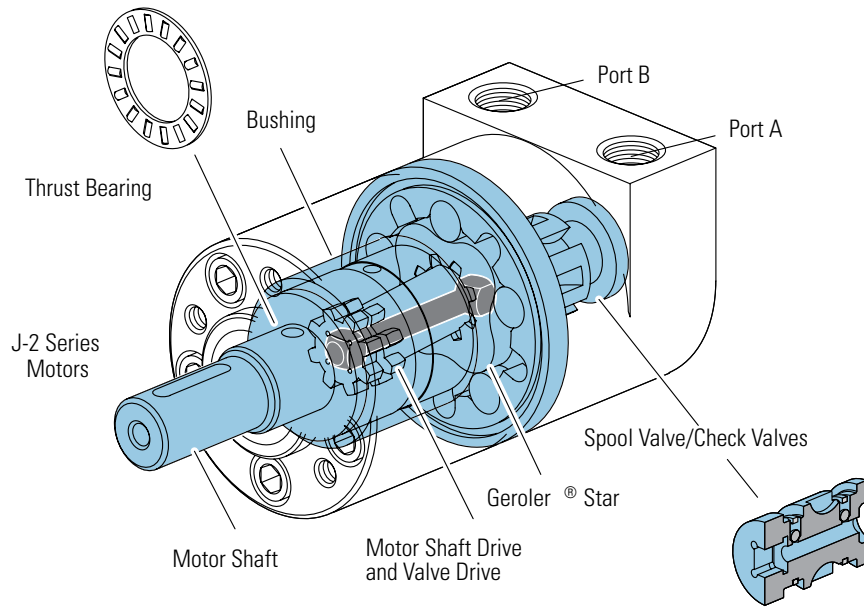

Description

Char-Lynn J Series motors provide a lot of power from a very small package. Up to 5 kW [6 1/2 HP] of power. These motors are 61 mm [2.4 in] in diameter and 104 to 130 mm [4.1 to 5.1 in] in length.

The J Series motor shaft and seal allows high case pressure up to 76 bar [1100 PSI] return line pressure without case drain line. When a case drain line is used a 220 bar [3190 PSI] peak pressure is allowed in the return line.

Specifications

Geroler Element	5 Displacements
Flow l/min [GPM]	21 [5.5] Continuous*** 25 [6.5] Intermittent**
Speed	Up to 1992 RPM Cont. Up to 2458 RPM Inter.
Pressure bar [PSI]	140 [2030] Cont.*** 165 [2400] Inter.**
Torque Nm [lb-in]	62 [549] Cont.*** 84 [743] Inter.**

*** Continuous—(Cont.) Continuous rating, motor may be run continuously at these ratings.

** Intermittent—(Inter.) Intermittent operation, 10% of every minute.

Features:

- Constant clearance Geroler set
- Integrated check valves
- Self-lubricating shaft bushing
- High-strength rigid components
- Increased valve seal lands
- High pressure seals
- Variety of displacements, shafts, mounts and special options

Benefits:

- High efficiency
- Extended leak-free performance
- Powerful compact package
- Design flexibility

Applications:

- Agricultural augers, harvesters, seeders
- Car wash tire spray wands and brushes
- Marine bow thrusters
- Food processing
- Railroad maintenance equipment
- Machine tools
- Conveyors
- Snow blower chute rotor
- Industrial sweepers and floor polishers
- Saw mill works
- Turf equipment reel drives
- Paint stripper
- Many more

B-1



Plastic Injection



Metal Forming




Food Processing



Ship-Boat Building

J Series (129-)

Specifications

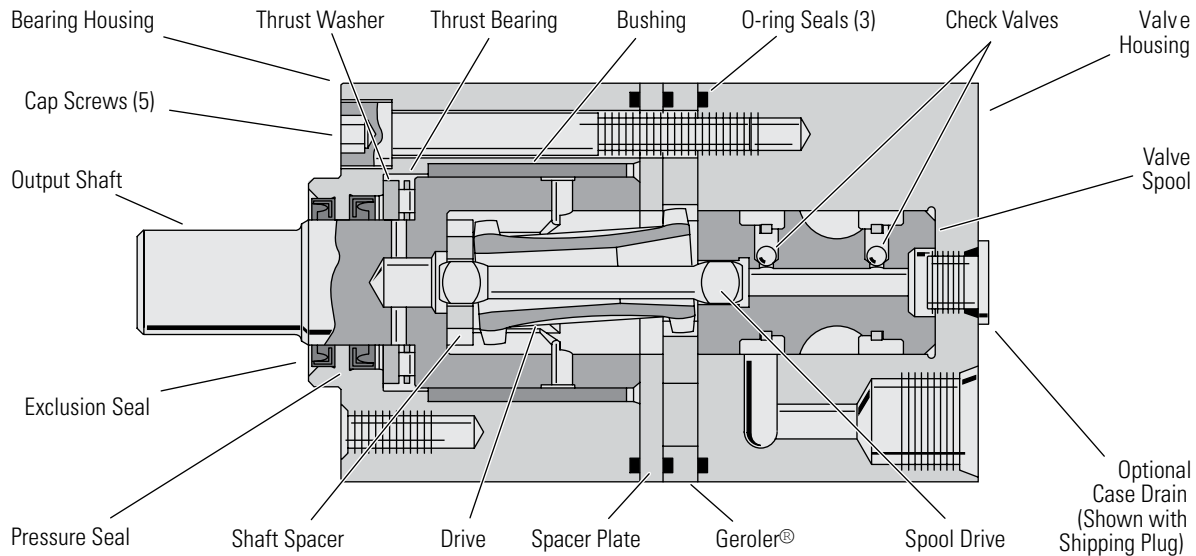

SPECIFICATION DATA – J MOTORS

Displ. cm ³ /r [in ³ /r]		8,2 [.50]	12,9 [.79]	19,8 [1.21]	31,6 [1.93]	50,0 [3.00]
Max. Speed (RPM) @ Continuous Flow		1992	1575	1043	650	393
Flow l/min [GPM]	Continuous	17 [4.5]	21 [5.5]	21 [5.5]	21 [5.5]	21 [5.5]
	Intermittent	21 [5.5]	25 [6.5]	25 [6.5]	25 [6.5]	25 [6.5]
Torque Nm [lb-in]	Continuous	16 [141]	25 [225]	38 [333]	50 [446]	62 [549]
	Intermittent	19 [164]	30 [263]	46 [405]	62 [546]	84 [743]
	Peak	22 [193]	36 [321]	48 [425]	83 [733]	86 [765]
Pressure Δ bar [Δ PSI]	Continuous	140 [2030]	140 [2030]	140 [2030]	121 [1750]	97 [1400]
	Intermittent	165 [2400]	165 [2400]	165 [2400]	150 [2175]	140 [2030]
	Peak	220 [3190]	220 [3190]	220 [3190]	190 [2756]	150 [2175]
Weight kg [lbs]		2 [4.4]	2,1 [4.6]	2,2 [4.8]	2,3 [5.0]	2,4 [5.4]

* Maximum pressure at motor inlet port is 220 Bar [3190 PSI] without regard to Δ bar [Δ PSI] and/or back pressure ratings or combination thereof.

Note:

To assure best motor life, run motor for approximately one hour at 30% of rated pressure before application to full load. Be sure motor is filled with fluid prior to any load applications.

Δ Pressure:

The true Δ bar [Δ PSI] difference between inlet port and outlet port.

See individual shafts for maximum torque recommendation. Splined shafts are recommended for those applications subject to frequent reversals.

Continuous Rating:

Motor may be run continuously at these ratings

Intermittent Operation:

10% of every minute

Peak Operation:

1% of every minute

Recommended Fluids:

Premium quality, anti-wear type hydraulic oil with a viscosity of not less than 70 SUS at operating temperature.

Recommended System Operating Temp.:

-34°C to 82°C
[-30°F to 180°F]

Recommended Filtration:

per ISO Cleanliness Code 4406, level 20/18/13

J Series (129-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed. For best motor life select a motor to run with a torque and speed range shown in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from motor to motor in production.

8,2 cm ³/r [.50 in ³/r]

D Pressure Bar [PSI]

Continuous

Max.
Contin-
uous

Max.
Inter-
mittent

		[200] 14	[400] 28	[500] 34	[600] 41	[700] 48	[800] 55	[1000] 69	[1400] 97	[1500] 103	[2000] 138	[2030] 140	[2400] 165
Flow LPM [GPM]	[1] 3,8	[11] 1 456	[25] 3 444	[33] 4 437	[40] 5 429	[47] 5 422	[55] 6 412	[69] 8 394	[96] 11 347	[102] 12 332	[130] 15 250	[132] 15 239	[146] 16 170
	[2] 7,6	[9] 1 897	[24] 3 886	[31] 4 877	[38] 4 867	[46] 5 860	[53] 6 847	[68] 8 823	[97] 11 768	[105] 12 749	[139] 16 657	[141] 16 647	[163] 18 557
	[3] 11,4	[6] 1 1349	[20] 2 1331	[28] 3 1318	[35] 4 1309	[44] 5 1296	[51] 6 1285	[65] 7 1261	[94] 11 1198	[102] 12 1176	[137] 15 1070	[139] 16 1060	[164] 19 959
	[4.25] 16,0		[16] 2 1902	[23] 3 1885	[30] 3 1873	[36] 4 1858	[44] 5 1846	[60] 7 1817	[90] 11 1750	[97] 11 1721	[133] 15 1599	[135] 15 1585	[160] 18 1475
	Max. Continuous 17,0		[16] 2 1992	[23] 3 1979	[29] 3 1964	[36] 4 1947	[43] 5 1929	[59] 7 1900	[89] 10 1833	[96] 10 1808	[131] 15 1684	[134] 15 1673	[160] 18 1553
Max. Inter- mittent 20,8		[5.5]	[12] 1 2458	[18] 2 2437	[26] 3 2420	[33] 4 2405	[40] 5 2387	[54] 6 2353	[83] 9 2272	[92] 10 2255	[124] 14 2134	[129] 15 2115	[154] 17 1994



Continuous



Intermittent

12,9 cm ³/r [0.79 in ³/r]

D Pressure Bar [PSI]

Continuous

Max.
Contin-
uous

Max.
Inter-
mittent

		[200] 14	[400] 28	[500] 34	[600] 41	[700] 48	[800] 55	[1000] 69	[1400] 97	[1450] 100	[1500] 103	[2000] 138	[2030] 140	[2400] 165
Flow LPM [GPM]	[1] 3,8	[19] 2 290	[43] 5 285	[54] 6 281	[65] 7 277	[76] 9 273	[88] 10 268	[109] 12 260	[154] 17 237	[159] 18 234	[164] 19 230	[214] 24 194	[217] 25 189	[250] 28 151
	[2] 7,6	[16] 2 573	[39] 4 566	[51] 6 561	[63] 7 555	[74] 8 549	[86] 10 544	[109] 12 534	[155] 18 501	[160] 18 496	[165] 19 490	[221] 25 442	[225] 25 437	[263] 30 396
	[3] 11,4	[11] 1 859	[35] 4 849	[47] 5 843	[58] 7 838	[70] 8 832	[82] 9 825	[105] 12 810	[152] 17 777	[157] 18 771	[163] 18 763	[219] 25 708	[223] 25 701	[263] 30 652
	[4] 15,1	[6] 1 1153	[30] 3 1140	[41] 5 1135	[53] 6 1129	[64] 7 1124	[76] 9 1117	[99] 11 1101	[146] 16 1060	[152] 17 1051	[157] 18 1044	[214] 24 982	[217] 25 975	[260] 29 924
	Max. Continuous 20,8		[19] 2 1575	[30] 3 1566	[42] 5 1556	[54] 6 1547	[65] 7 1539	[89] 10 1521	[136] 15 1473	[142] 16 1466	[148] 17 1457	[205] 23 1396	[209] 24 1387	[251] 29 1330
Max. Inter- mittent 24,6		[6.5]	[11] 1 1859	[23] 3 1851	[35] 4 1842	[46] 5 1831	[56] 6 1820	[81] 9 1804	[130] 15 1755	[135] 15 1743	[140] 16 1734	[198] 22 1670	[202] 23 1663	[243] 27 1599

[42]
5
1556 } Torque [lb-in]
Nm
Speed RPM

J Series (129-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed. For best motor life select a motor to run with a torque and speed range shown in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from motor to motor in production.

		19.8 cm³/r [1.21 in³/r] D Pressure Bar [PSI] Continuous												Max. Contin- uous	Max. Inter- mittent
		[200] 14	[400] 28	[500] 34	[600] 41	[700] 48	[800] 55	[1000] 69	[1400] 97	[1450] 100	[1500] 103	[2000] 138	[2030] 140	[2400] 165	
Flow LPM [GPM]	[1] 3,8	[32] 4 189	[67] 8 187	[85] 10 186	[102] 12 185	[119] 13 183	[136] 15 182	[170] 19 179	[236] 27 172	[244] 28 170	[253] 29 169	[321] 36 141	[325] 37 138	[374] 42 114	
	[2] 7,6	[30] 3 379	[65] 7 375	[83] 9 373	[101] 11 370	[119] 13 368	[136] 15 366	[172] 19 361	[223] 25 351	[248] 28 349	[257] 29 347	[328] 37 312	[333] 38 309	[388] 44 285	
	[3] 11,4	[21] 2 569	[57] 6 565	[75] 8 563	[93] 11 560	[111] 13 558	[128] 14 556	[163] 18 551	[231] 26 529	[240] 27 526	[248] 29 523	[325] 37 487	[330] 38 484	[405] 46 459	
	[4] 15,1	[12] 1 761	[47] 5 758	[65] 7 754	[83] 9 751	[101] 11 749	[119] 13 746	[154] 17 741	[221] 25 717	[230] 26 711	[239] 27 707	[316] 36 660	[320] 37 656	[382] 43 628	
	Max. Contin- uous 20,8		[31] 4 1043	[49] 6 1040	[67] 8 1035	[84] 9 1033	[101] 11 1028	[137] 15 1021	[202] 23 997	[211] 24 993	[218] 25 990	[295] 33 938	[299] 34 934	[365] 41 899	
Max. Inter- mittent 24,6			[21] 2 1226	[38] 4 1222	[56] 6 1219	[74] 8 1215	[91] 10 1211	[126] 14 1204	[189] 21 1179	[196] 22 1174	[206] 23 1169	[278] 31 1121	[283] 32 1117	[347] 39 1079	

	Continuous
	Intermittent

		31.6 cm³/r [1.93 in³/r] D Pressure Bar [PSI] Continuous												Max. Contin- uous	Max. Inter- mittent
		[200] 14	[400] 28	[500] 34	[600] 41	[700] 48	[800] 55	[1000] 69	[1400] 97	[1450] 100	[1500] 103	[1750] 121	[2175] 150		
Flow LPM [GPM]	[1] 3,8	[51] 6 118	[106] 12 116	[133] 15 115	[160] 18 113	[187] 21 112	[213] 24 111	[265] 30 107	[362] 41 91	[372] 42 85	[383] 43 81	[439] 50 70			
	[2] 7,6	[46] 5 236	[103] 12 234	[132] 15 232	[159] 18 230	[187] 21 228	[214] 24 225	[269] 30 221	[362] 41 187	[374] 42 179	[387] 44 175	[446] 50 165	[546] 62 145		
	[3] 11,4	[36] 4 355	[94] 11 352	[122] 14 349	[149] 17 347	[177] 20 345	[205] 23 342	[259] 29 336	[351] 40 296	[364] 41 292	[377] 43 287	[440] 50 273	[542] 61 245		
	[4] 15,1	[24] 3 474	[79] 9 472	[107] 12 469	[135] 15 466	[162] 18 462	[190] 21 460	[246] 28 452	[337] 38 404	[349] 39 397	[362] 41 393	[425] 48 373	[528] 60 346		
	Max. Contin- uous 20,8		[55] 6 650	[83] 9 647	[111] 13 645	[139] 16 640	[167] 19 636	[221] 25 629	[307] 35 584	[320] 36 580	[334] 38 575	[400] 45 550	[505] 57 513		
Max. Inter- mittent 24,6			[35] 4 767	[64] 7 764	[93] 11 760	[121] 14 755	[150] 17 751	[204] 23 742	[279] 32 712	[294] 33 707	[308] 35 701	[378] 43 675	[485] 55 637		

		50.0 cm³/r [3.00 in³/r] D Pressure Bar [PSI] Continuous												Max. Contin- uous	Max. Inter- mittent
		[200] 14	[400] 28	[500] 34	[600] 41	[700] 48	[800] 55	[1000] 69	[1100] 76	[1200] 83	[1300] 90	[1400] 97	[2030] 140		
Flow LPM [GPM]	[1] 3,8	[82] 9 75	[167] 19 72	[211] 24 72											
	[2] 7,6	[70] 8 149	[156] 18 147	[201] 23 145	[243] 28 144	[286] 32 143	[327] 37 142								
	[3] 11,4	[53] 6 221	[140] 16 220	[184] 21 218	[227] 26 217	[271] 31 215	[311] 35 213	[396] 45 209	[441] 50 205	[484] 55 201	[521] 59 200	[549] 62 191			
	[4] 15,1	[30] 3 296	[120] 14 292	[162] 18 289	[204] 23 286	[250] 28 284	[292] 33 282	[374] 42 273	[419] 47 270	[460] 52 265	[501] 57 263	[541] 61 259	[743] 84 213		
	Max. Contin- uous 20,8		[81] 9 393	[127] 14 392	[170] 19 389	[214] 24 387	[254] 29 383	[339] 38 377	[379] 43 372	[422] 48 369	[463] 52 364	[506] 57 358	[702] 79 302		
Max. Inter- mittent 24,6			[47] 5 465	[90] 10 462	[133] 15 460	[176] 20 458	[219] 25 455	[307] 35 448	[345] 39 445	[385] 43 440	[429] 48 435	[467] 53 430	[685] 77 364		

[81]
9
393 } Torque [lb-in]
Nm
Speed RPM

J Series (129-)

Dimensions

Standard Rotation Viewed from Shaft End


Port A Pressurized — CW

Port B Pressurized — CCW

B-1

9/16 Inch End Port


9/16 -18 UNF - 2B O-Ring Ports, M14 x 1,5
- 6H O-Ring Ports — Metric Motor or
G 1/4 (BSP) Ports (2 Ports each)

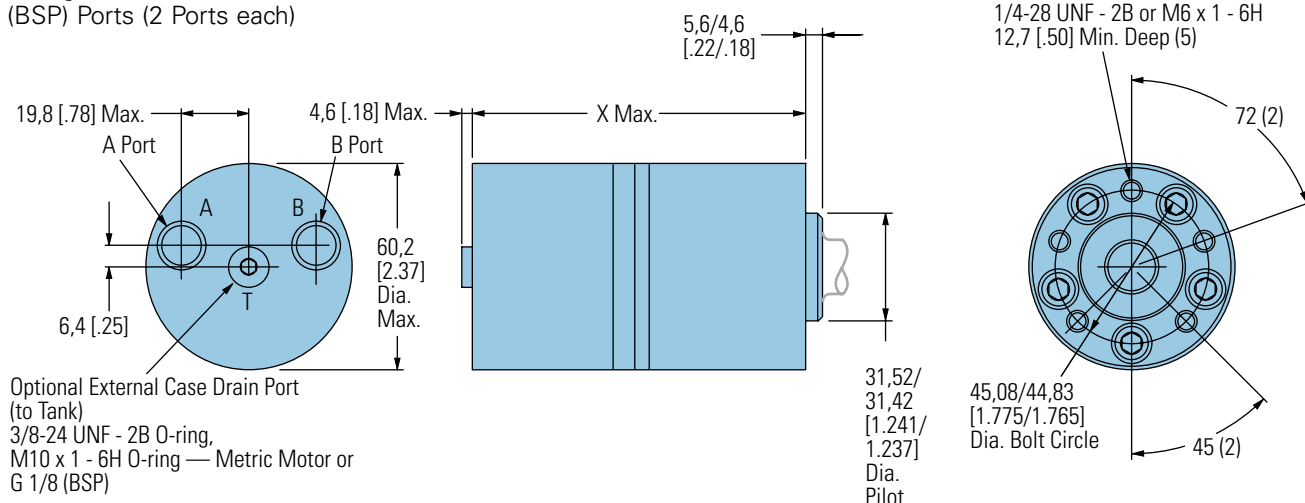

END PORT DIMENSIONS

Displacement cm ³ /r [in ³ /r]	X mm [inch]
8,2 [.50]	103,9 [4.09]
12,9 [.79]	106,9 [4.21]
19,8 [1.21]	112,5 [4.38]
31,6 [1.93]	118,9 [4.68]
50,0 [3.00]	130,3 [5.13]

3/8 Inch End Port

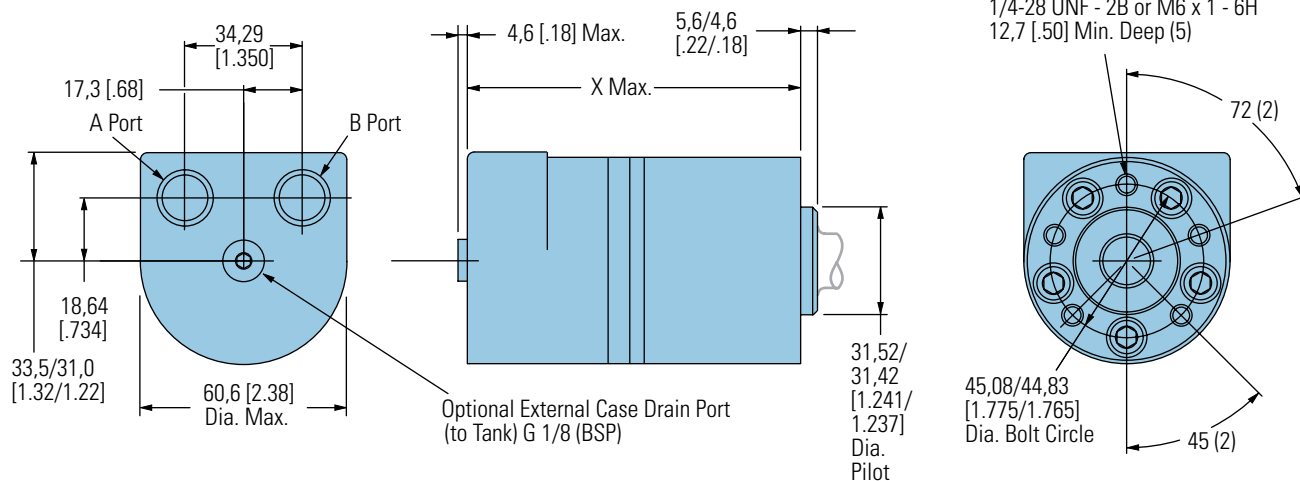

END PORT DIMENSIONS

Displacement cm ³ /r [in ³ /r]	X mm [inch]
8,2 [.50]	103,9 [4.09]
12,9 [.79]	106,9 [4.21]
19,8 [1.21]	112,5 [4.38]
31,6 [1.93]	118,9 [4.68]
50,0 [3.00]	130,0 [5.12]
160,5 [6.32]	132,3 [5.21]

J Series (129-)

Dimensions


Ports

9/16 -18 UNF - 2B O-Ring Ports,
M14 x 1,5 -6H O-Ring Ports — Metric Motor,
G 3/8 or G 1/4 (BSP) Ports (2)

Standard Rotation Viewed from Shaft End

Port A Pressurized — CW
Port B Pressurized — CCW

Side Port

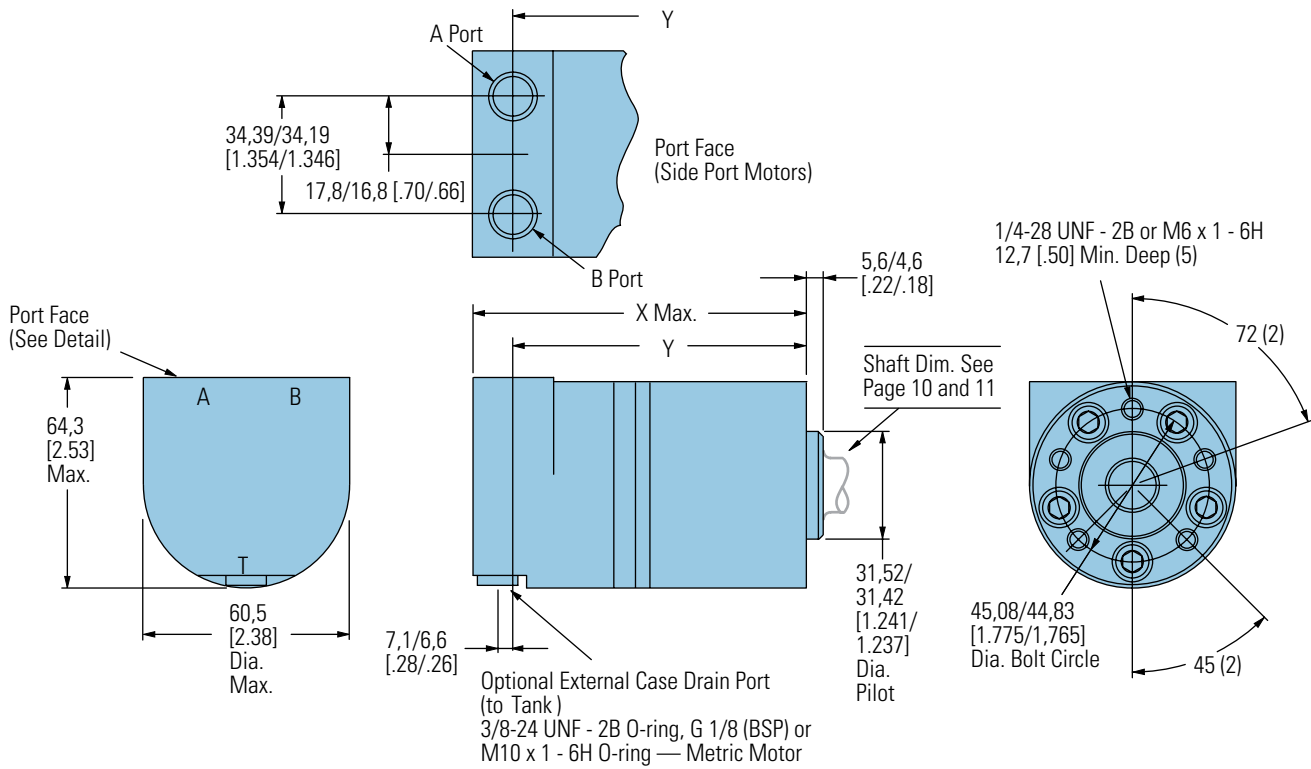

SIDE PORT MOTORS

Displacement cm ³ /r [in ³ /r]	X mm [inch]	Y mm [inch]
8,2 [.50]	103,9 [4.09]	89,4/ 87,4 [3.52/3.44]
12,9 [.79]	106,9 [4.21]	92,5/ 90,4 [3.64/3.56]
19,8 [1.21]	112,5 [4.38]	96,8/ 94,7 [3.81/3.73]
31,6 [1.93]	118,9 [4.68]	104,4/102,4 [4.11/4.03]
50,0 [3.00]	130,0 [5.12]	115,7/113,9 [4.56/4.48]


J Series (129-)

Dimensions


Shafts

B-1


5/8 Inch Straight Keyed

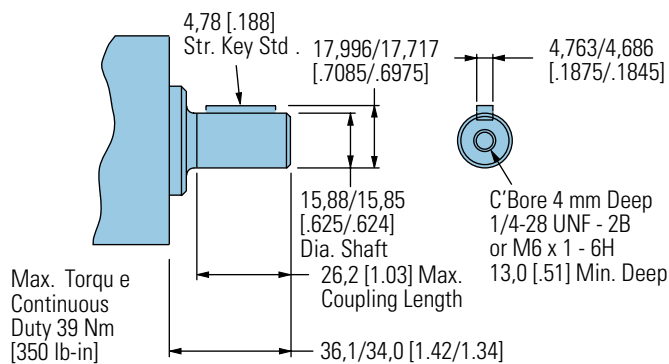

11/16 Inch Straight Keyed

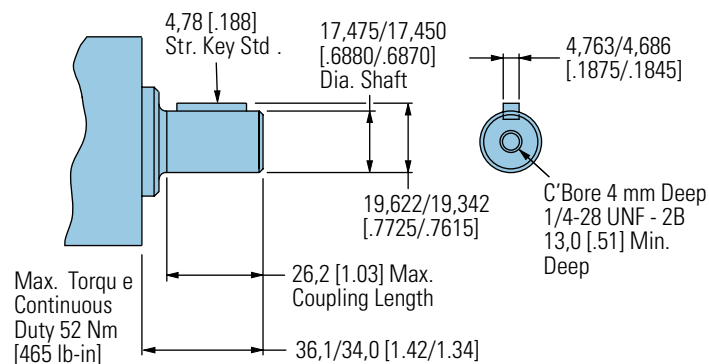


5/8 Inch Straight Keyed w/ Crosshole

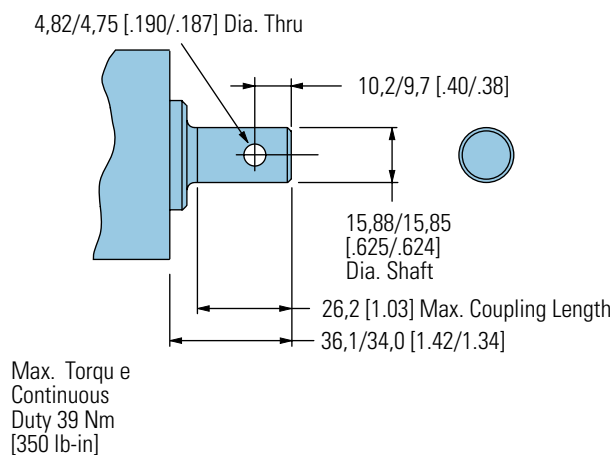

3/4 Inch Tapered

(Tapered Shaft End Per SAE J744)

Except as Specified — 1.5 : 12 Ratio)

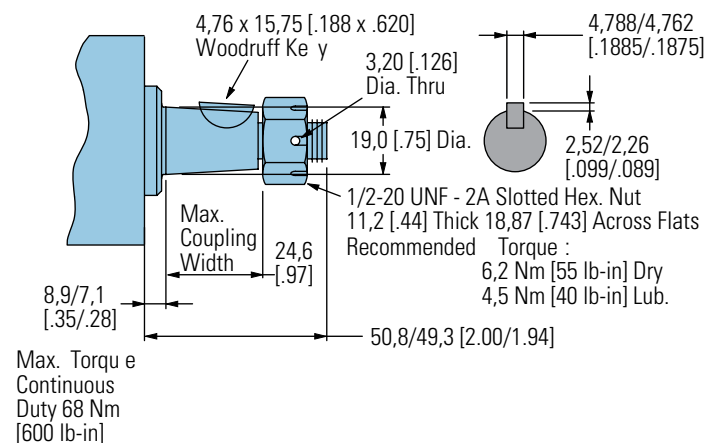


J Series (129-)


Dimensions

Shafts and Flange Kit


16 mm Straight Keyed

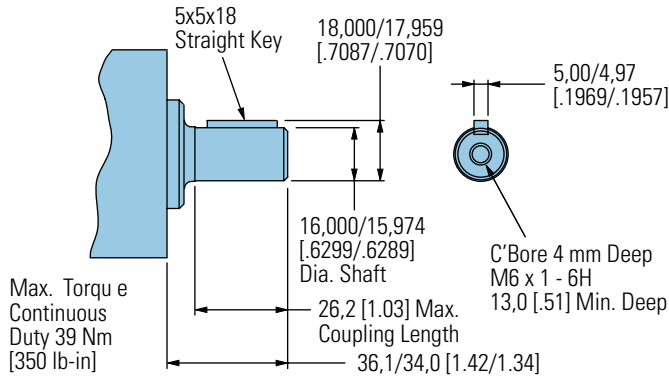


18 mm Straight Keyed

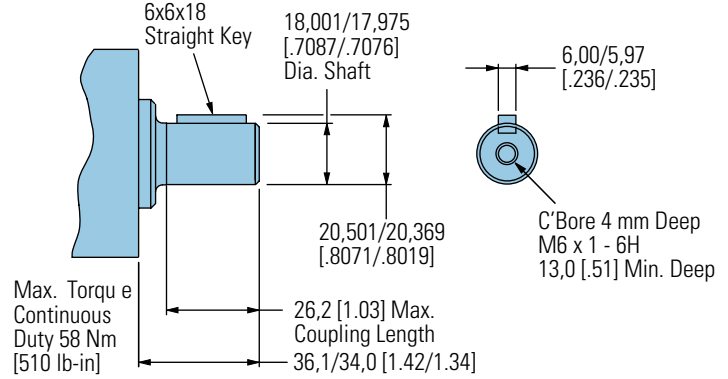

Involute 9T Splined – Metric

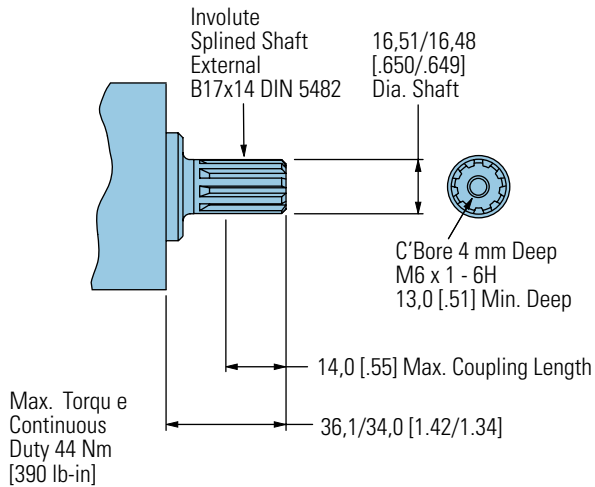

2 Bolt Flange Kits (2)

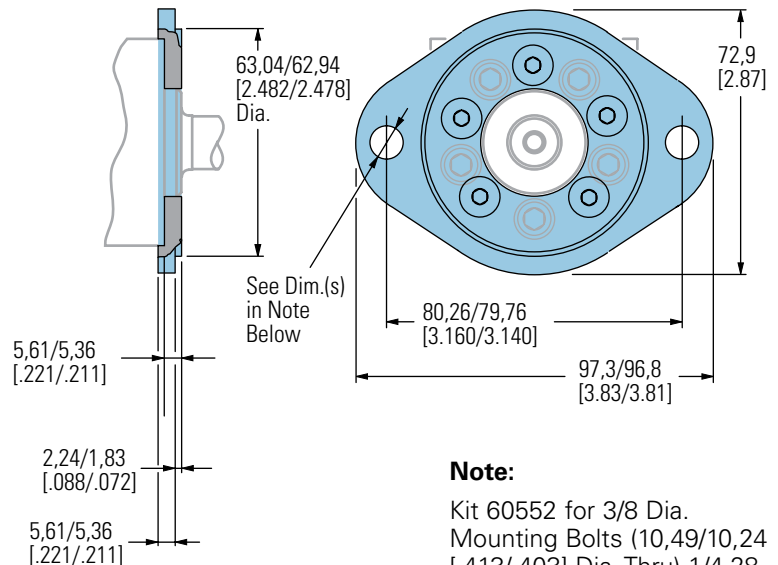

Note:

Kit 60552 for 3/8 Dia. Mounting Bolts (10,49/10,24 [.413/.403] Dia. Thru) 1/4-28 UNF screws for attaching flange to motor (5)

Kit 60553 for M8 Dia. Mounting Bolts (9,12/8,86 [.359/.349] Dia. Thru) M6 x 1 - 6H screws for attaching flange to motor (5)

J Series (129-)

Product Numbers

Use digit prefix —
129- plus four digit number
from charts for complete
product number—
Example 129-0479.

**Orders will not be accepted
without three digit prefix.**

B-1

End Port

MOUNTING	SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER				
			8,2 [.50]	12,9 [.79]	19,8 [1.21]	31,6 [1.93]	50,0 [3.00]
1/4-28 UNF 2B	5/8 inch Straight	9/16 -18 UNF 2B O-Ring (2)	129-0291	-0292	-0293	-0294	-0458
	11/16 inch Straight		129-0295	-0296	-0297	-0298	-0459
	Splined — Metric		129-0299	-0300	-0301	-0302	-0460
	3/4 inch Tapered		129-0480				
M6 x 1 - 6H	16 mm Straight	M14 x 1,5 - 6H O-Ring (2)	129-0303	-0304	-0305	-0306	-0461
	18 mm Straight		129-0307	-0308	-0309	-0310	-0462
	Splined — Metric		129-0311	-0312	-0313	-0314	-0463
	16 mm Straight	G 1/4 (BSP) (2)	129-0315	-0316	-0317	-0318	-0464
	18 mm Straight		129-0319	-0320	-0321	-0322	-0465
	Splined — Metric		129-0323	-0324	-0325	-0326	-0466
	16 mm Straight	G 3/8 (BSP) (2)*	129-0327	-0328	-0329	-0330	-0467
	18 mm Straight		129-0331	-0332	-0333	-0334	-0468
	Splined — Metric		129-0335	-0336	-0337	-0338	-0469

*Note: The Same Casting used for Side Ports is Required for G 3/8 (BSP) End Ports

129-0336

Side Port

MOUNTING	SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER				
			8,2 [.50]	12,9 [.79]	19,8 [1.21]	31,6 [1.93]	50,0 [3.00]
1/4-28 UNF 2B	5/8 inch Straight	9/16 -18 UNF 2B O-Ring (2)	129-0339	-0340	-0341	-0342	-0470
	11/16 inch Straight		129-0343	-0344	-0345	-0346	-0471
	Splined — Metric		129-0347	-0348	-0349	-0350	-0472
	3/4 inch Tapered		129-0481				
M6 x 1 - 6H	16 mm Straight	M14 x 1,5 - 6H O-Ring (2)	129-0351	-0352	-0353	-0354	-0473
	18 mm Straight		129-0355	-0356	-0357	-0358	-0474
	Splined — Metric		129-0359	-0360	-0361	-0362	-0475
	16 mm Straight	G 1/4 (BSP) (2)	129-0363	-0364	-0365	-0366	-0476
	18 mm Straight						
	Splined — Metric		129-0367	-0368	-0369	-0370	-0477
	16 mm Straight	G 3/8 (BSP) (2)	129-0371	-0372	-0373	-0374	-0403
	18 mm Straight		129-0375	-0376	-0377	-0378	-0478
	Splined — Metric		129-0379	-0380	-0381	-0382	-0479

Two Bolt Mounting Flange Kit (for 3/8 inch Mounting Bolts) — Kit Number 60552 (includes 5 screws — 1/4 -28 UNF-2B)

Two Bolt Mounting Flange Kit (for M8 Mounting Bolts) — Kit Number 60553 (includes 5 screws — M6 x 1-6H)

J Series (129-)



Shaft Side Load Capacity

The hydrodynamic bearing has infinite life when shaft load ratings are not exceeded. Hence, the shaft side load capacity is more than adequate to handle most externally applied loads (such as belts, chains, etc.), providing the motor to shaft size is applied within its torque rating.

Allowable side load chart, shaft load location drawing (right) and load curves (below) are based on the

side or radial loads being applied to shaft at locations A, B, and C, to determine the shaft side load capacity at locations other than those shown use the formula (shown below). For more information about shaft side loads on Char-Lynn motors contact your Eaton representative.

ALLOWABLE SIDE LOAD – KG [LB]			
RPM	A	B	C
2300	29 [64]	24 [53]	20 [43]
1500	44 [98]	37 [82]	30 [66]
1250	54 [118]	44 [98]	36 [79]
1000	67 [147]	55 [122]	45 [99]
750	89 [196]	74 [163]	60 [132]
600	111 [245]	93 [204]	75 [165]
500	133 [294]	111 [245]	90 [198]
400	167 [368]	139 [306]	112 [248]
340	196 [432]	163 [360]	132 [291]

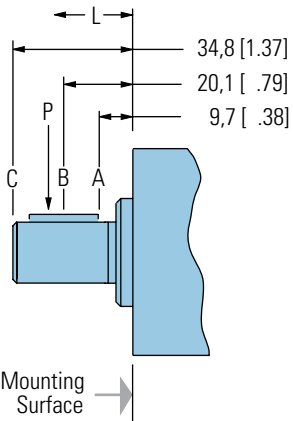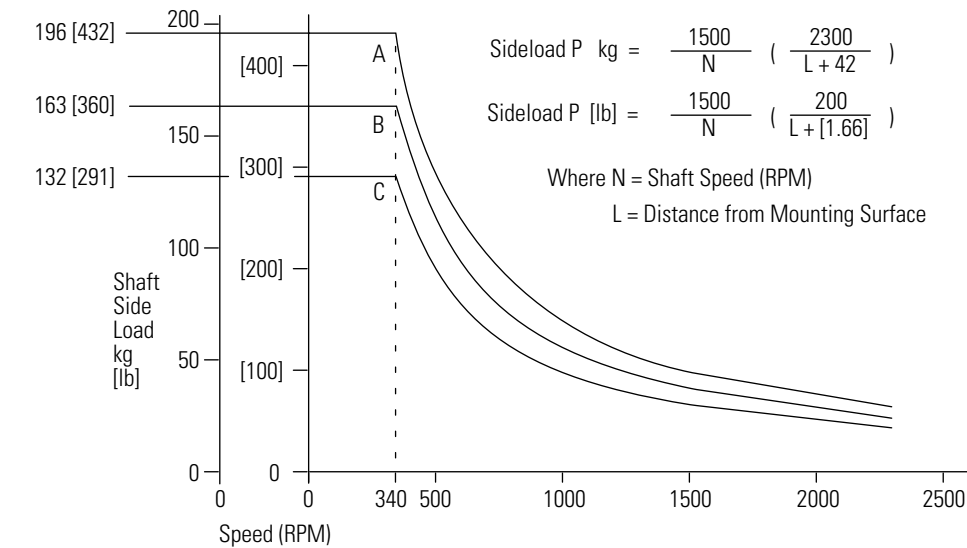

J Series (129-)

Case Pressure and Case Drain

B-1

The J Series now offers check valves in the motor as a standard feature. This addition reduces the case pressure in the motor to the return pressure of the system when the case drain is not used. For return pressures higher than the rated pressures (see chart) the external case drain can be connected. If the case drain line is needed, connect drain line to assure that the motor will always remain full of fluid.

Case Drain Advantage

In addition to providing lower case pressures for motors connected in series, there are advantages for adding an external case drain line to motors with normal case pressures as well. These advantages are:

Contamination Control — flushing the motor case.

Motor Cooler — exiting oil draws motor heat away.

Extend Motor Seal Life — maintain low case pressure with a preset restriction installed in the case drain line

Example:

A 14 Bar case pressure will cause a load of 40 kg, so the allowable thrust load will be 82 kg plus 40 = 120 kg pushing inward on shaft. Tension load is 82 kg under all case pressure conditions.




Example:

A 200 PSI case pressure will cause a load of 88 lbs, so the allowable thrust load will be 180 lbs plus 88 = 268 lbs pushing inward on shaft. Tension load is 180 lb under all case pressure conditions

Note:

J Series motors can be connected in parallel or in series.

Case pressure will add to the allowable compressive thrust load. Case pressure will push outward on the shaft at 20 kg/7 Bar [44 lb/100 PSI].

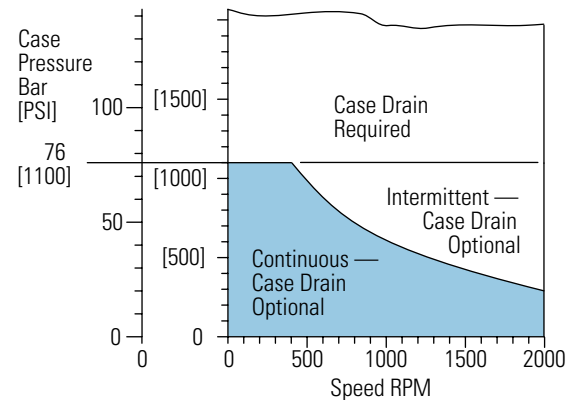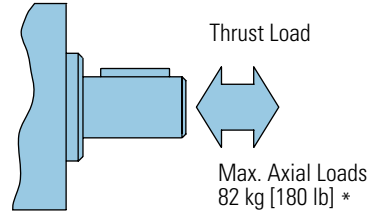


Case Pressure Seal Limitation

J Series (129-)

Model Code

The following 16-digit coding system has been developed to identify all of the configuration options for the J motor. Use this model code to specify a motor with the desired features. All 16-digits of the code must be present when ordering. You may want to photocopy the matrix below to ensure that each number is entered in the correct box.



1 Product

M – Motor

2, 3 Series

0J – J Series

4, 5 Displacement cm³/r [in³/r]

05 – 8,2 [.50]

08 – 12,9 [.79]

12 – 19,8 [1.21]

19 – 31,6 [1.93]

30 – 50,0 [3.00]

6 Mounting Type

A – 5 Bolt: Dia. 31,47 [1.239] x 5,1 [.20] Pilot 1/4-28 UNF 2B Mounting Holes on 45 [1.77] Dia. Bolt Circle

B – 5 Bolt: Dia. 31,47 [1.239] x 5,1 [.20] Pilot M6 x 1- 6H Mounting Holes on 45 [1.77] Dia. Bolt Circle

C – 2 Bolt: Dia. 62,99 [2.480] x 2,0 [.08] Pilot 10,36[.408] Mounting Holes on 80,0 [3.150] Dia. Bolt Circle

D – 2 Bolt: Dia. 62,99 [2.480] x 2,0 [.08] Pilot 9,0 [.354] Mounting Holes on 80,0 [3.150] Dia. Bolt Circle

7, 8 Output Shaft

01 – 5/8 inch Dia. Straight with 4,72 [.186] Square Key and 1/4-28 UNF - 2B Threaded Hole

02 – 16 mm Dia. Straight with 5,00 [.197] Square Key with M6 x 1 - 6H Threaded Hole

04 – 11/16 inch Dia. Straight with 4,72 [.186] Square Key and 1/4-28 UNF - 2B Threaded Hole

05 – 18 mm Dia. Straight with 5,92 [.233] Square Key with M6 x 1 - 6H Threaded Hole

06 – Involute Splined 9T—Metric 16,50 [.650] Dia. (B17 x 14 DIN 5482) M6 x 1 - 6H Threaded Hole

07 – 5/8 inch Dia. Straight with 4,75 [.187] Dia. Crosshole

08 – 3/4 inch Tapered with Woodruff Key and Nut

09 – 5/8 inch Dia. Straight with 4,72 [.186] Sq. Key with 1/4-28 UNF -2B Threaded Hole (Plated for Corrosion Protection)

14 – 16 mm Dia. Straight with 5,00 [.197] Sq. Key with M6 x 1- 6H Threaded Hole (Plated for Corrosion Protection)

9 Ports

A – 9/16 -18 UNF - 2B O-Ring End Ported

B – G 1/4 (BSP) End Ported

C – M14 x 1,5 - 6H O-Ring Port, End Ported

D – 9/16 -18 UNF - 2B O-Ring Side Ported

E – G 3/8 (BSP) Side Ported

F – G 1/4 (BSP) Side Ported

H – G 3/8 (BSP) End Ported

10 Case Flow Options

0 – No Case Drain

1 – 3/8 -24 UNF - 2B O-Ring

2 – G 1/8 (BSP)

3 – M10 x 1 - 6H O-Ring

11, 12 Special Features (Hardware)

00 – None

13 Special Features (Assembly)

0 – None

1 – Reverse Rotation

14 Paint/Special Packaging

0 – No Paint, Individual Box

A – Low Gloss Black Primer, Individual Box

B – No Paint, Bulk Box Option

15 Eaton Assigned Code when Applicable


0 – Assigned Code

16 Eaton Assigned Design Code

B – Assigned Design Code

H Series (101-)

Highlights

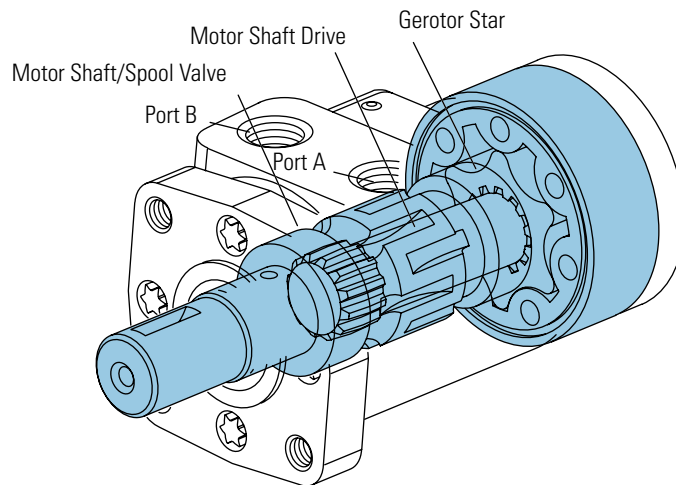

Description

Designed for medium duty applications, these motors use industry-proven spool valve technology combined with state-of-the-art gerotors. In addition, a wide variety of mounting flanges, shafts, Ports and valving options provide design flexibility. Direction of shaft rotation and shaft speed can be controlled easily and smoothly throughout the speed range of the motor, and equipment can be driven direct, eliminating costly mechanical components.

Specifications

Gerotor Element	13 Displacements
Flow l/min [GPM]	57 [15] Continuous***
	76 [20] Intermittent**
Speed	Up to 1100 RPM
Pressure bar [PSI]	125 [1800] Cont.***
	165 [2400] Inter.**
Torque Nm [lb-in]	407 [3604] Cont.***
	520 [4600] Inter.**

*** Continuous—(Cont.) Continuous rating, motor may be run continuously at these ratings.

** Intermittent—(Inter.) Intermittent operation, 10% of every minute.

Features:

- Time-tested Char-Lynn drive set
- Three moving components (gerotor-star, drive, and shaft)
- Optimized drive running angle
- Three-zone pressure design (inlet, return and case)
- Variety of displacements, shafts and mounts
- Special options to meet customer needs

Benefits:

- High efficiency
- Powerful compact package
- Design flexibility
- Extended leak-free performance

Applications:

- Agricultural augers, harvesters, seeders
- Car wash brushes
- Food processing
- Railroad maintenance equipment
- Machine tools
- Conveyors
- Industrial sweepers and floor polishers
- Saw mill works
- Turf equipment
- Concrete and asphalt equipment
- Skid steer attachments
- Many more

B-2



Conveyer



Combine




Sweeper



Salt and Sand Spreader

H Series (101-)

Specifications

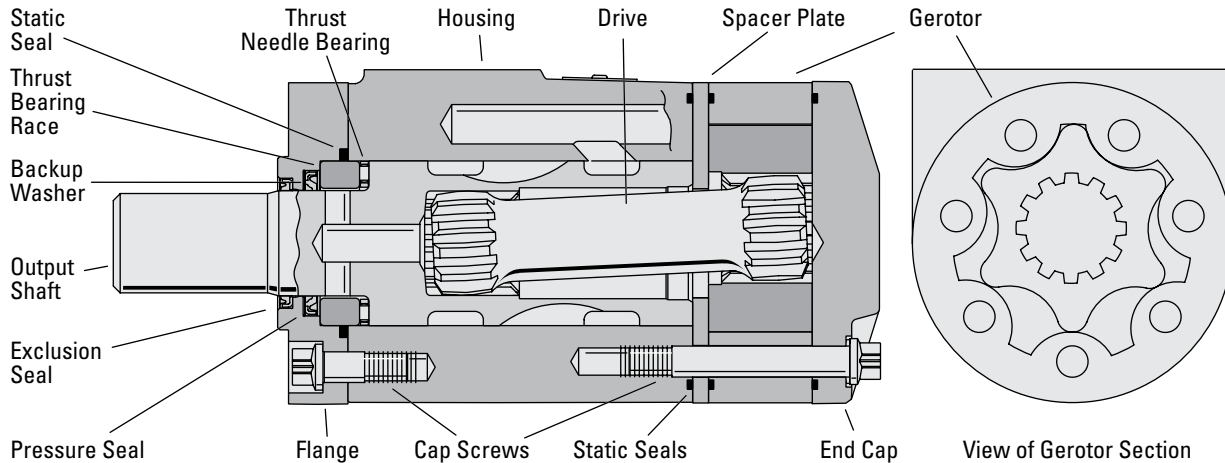

SPECIFICATION DATA — H MOTORS

Displ. cm ³ /r [in ³ /r]		36 [2.2]	46 [2.8]	59 [3.6]	74 [4.5]	97 [5.9]	120 [7.3]	146 [8.9]	159 [9.7]	185 [11.3]	231 [14.1]	293 [17.9]	370 [22.6]	739 [45.1]
Max. Speed (RPM) @ Continuous Flow		1021	969	953	760	585	469	385	353	304	243	192	152	74
Flow LPM [GPM]	Continuous	38 [10]	45 [12]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]
	Intermittent	38 [10]	53 [14]	64 [17]	68 [18]	68 [18]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]
Torque Nm [lb-in]	Continuous	56 [497]	73 [650]	91 [802]	118 [1044]	155 [1368]	192 [1699]	221 [1954]	233 [2059]	265 [2343]	302 [2669]	351 [3110]	407 [3604]	389 [3440]
	Intermittent	75 [668]	99 [876]	122 [1076]	158 [1401]	207 [1829]	257 [2278]	300 [2653]	319 [2824]	356 [3151]	415 [3671]	466 [4121]	484 [4283]	520 [4600]
Min. Starting Torque Nm [lb-in]	@ Cont. Pressure	46 [410]	59 [520]	76 [670]	95 [840]	124 [1100]	154 [1360]	176 [1560]	186 [1650]	211 [1870]	238 [2110]	282 [2500]	330 [2920]	316 [2800]
	@ Int. Pressure	63 [560]	81 [720]	104 [920]	130 [1150]	171 [1510]	2102 [1860]	46 [2180]	262 [2320]	293 [2590]	339 [3000]	388 [3430]	408 [3610]	434 [3840]
Pressure ΔBar [Δ PSI]	Continuous	124 [1800]	124 [1800]	124 [1800]	124 [1800]	124 [1800]	124 [1800]	117 [1700]	114 [1650]	110 [1600]	100 [1450]	93 [1350]	86 [1250]	41 [600]
	Intermittent	165 [2400]	165 [2400]	165 [2400]	165 [2400]	165 [2400]	165 [2400]	159 [2300]	155 [2250]	148 [2150]	138 [2000]	124 [1800]	103 [1500]	55 [800]
End Ported Units Only														
Δ Bar [Δ PSI]	Cont. Pressure	83 [1200]	83 [1200]	76 [1100]	76 [1100]	76 [1100]	69 [1000]	69 [1000]	69 [1000]	62 [900]	55 [800]	48 [700]	57 [825]	27 [396]
	Intermittent	117 [1700]	117 [1700]	110 [1600]	110 [1600]	110 [1600]	103 [1500]	103 [1500]	103 [1500]	91 [1400]	90 [1300]	83 [1200]	68 [990]	36 [528]
Weight kg [lb]		5,1 [11.2]	5,1 [11.2]	5,2 [11.5]	5,2 [11.5]	5,4 [11.8]	5,5 [12.1]	5,6 [12.4]	5,7 [12.5]	5,8 [12.8]	6,0 [13.3]	6,3 [14.0]	6,7 [14.7]	8,4 [18,6]

A simultaneous maximum torque and maximum speed NOT recommended.

Note:

To assure best motor life, run motor for approximately one hour at 30% of rated pressure before application to full load. Be sure motor is filled with fluid prior to any load applications.

Note:

Δ pressure is derated for end ported units.

Maximum Inlet Pressure:

172 Bar [2500 PSI] without regard to Δ Bar [Δ PSI] and/or back pressure ratings or combination thereof.

6B splined or Tapered shafts are recommended whenever operation above 282 NM [2500 lb-in] of torque, especially for those applications subject to frequent reversals.

Δ Pressure:

The true Δ bar [Δ PSI] difference between inlet port and outlet port

Continuous Rating:

Motor may be run continuously at these ratings

Intermittent Operation:

10% of every minute

Recommended Fluids:

Recommended Fluids — Premium quality, anti-wear type hydraulic oil. Minimum oil viscosity (at operating temperature) should be the highest of the following:

$$\left[\begin{aligned} \frac{300 \times \text{Bar}}{\text{RPM}} &= \text{SUS} \\ \frac{20 \times \text{PSI}}{\text{RPM}} &= \text{SUS} \end{aligned} \right]$$

Recommended System Operating Temp.:

-34°C to 82°C [-30°F to 180°F]

Recommended Filtration:


per ISO Cleanliness Code 4406, level 20/18/13

H Series (101-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range printed in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production.



		36 cm ³ /r [2.2 in ³ /r]										Max. Continuous	Max. Intermittent
		Δ Pressure Bar [PSI]											
		Continuous											
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]			
		14	28	41	55	69	83	97	110	124			[2400]
Flow LPM [GPM]	[2]	[49]	[103]	[162]	[189]	[270]	[325]	[379]	[432]	[489]			[650]
	7.6	6	12	18	21	31	37	43	49	55			73
		204	201	198	194	189	184	177	170	162			122
	[4]	[47]	[106]	[160]	[191]	[274]	[327]	[384]	[439]	[495]			[654]
	15.1	5	12	18	22	31	37	43	50	56			74
		408	407	402	399	394	387	381	373	365			323
Max. Continuous	[6]	[44]	[102]	[158]	[188]	[272]	[328]	[383]	[440]	[496]			[661]
	22.7	5	12	18	21	31	37	43	50	56			75
		613	612	609	604	599	591	586	576	565			523
Max. Continuous	[8]	[40]	[97]	[153]	[184]	[270]	[326]	[383]	[440]	[497]			[668]
	30.3	5	11	17	21	31	37	43	50	56			75
		817	817	814	807	799	793	785	776	762			721
Max. Continuous	[10]	[36]	[90]	[148]	[180]	[265]	[322]	[380]	[438]	[495]			[664]
	37.9	4	10	17	20	30	36	43	49	56			75
		1021	1021	1015	1008	1001	991	981	969	959			920

[90]
10 } Torque [lb-in]
1021 } Nm
Speed RPM


		46 cm ³ /r [2.8 in ³ /r]										Max. Continuous	Max. Intermittent
		Δ Pressure Bar [PSI]											
		Continuous											
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]			
		14	28	41	55	69	83	97	110	124			[2400]
Flow LPM [GPM]	[2]	[64]	[136]	[212]	[284]	[355]	[426]	[497]	[567]	[641]			[852]
	7.6	7	15	24	32	40	48	56	64	72			96
		161	158	156	153	148	145	139	133	127			95
	[4]	[61]	[139]	[209]	[286]	[359]	[429]	[503]	[576]	[649]			[857]
	15.1	7	16	24	32	41	48	57	65	73			97
		323	320	316	314	310	304	300	293	287			253
Max. Continuous	[6]	[58]	[134]	[207]	[282]	[356]	[430]	[502]	[577]	[650]			[867]
	22.7	7	15	23	32	40	49	57	65	73			98
		486	481	479	475	471	464	461	453	444			410
Max. Continuous	[8]	[52]	[128]	[200]	[276]	[354]	[428]	[502]	[577]	[651]			[876]
	30.3	6	14	23	31	40	48	57	65	74			99
		648	643	640	635	628	623	617	610	599			566
Max. Continuous	[10]	[47]	[118]	[194]	[269]	[347]	[423]	[498]	[575]	[649]			[871]
	37.9	5	13	22	30	39	48	56	65	73			98
		808	803	798	793	787	779	771	761	753			722
Max. Intermittent	[12]	[36]	[109]	[188]	[260]	[340]	[417]	[492]	[567]	[643]			[864]
	45.4	4	12	21	29	38	47	56	64	73			98
		969	964	960	952	946	938	931	922	914			877
Max. Intermittent	[14]	[25]	[98]	[175]	[249]	[327]	[404]	[484]	[559]	[634]			
	53.0	3	11	20	28	37	46	55	63	72			
		1127	1123	1115	1108	1100	1093	1086	1079	1068			

H Series (101-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range printed in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production.



		59 cm ³ /r [3.6 in ³ /r] Δ Pressure Bar [PSI] Continuous										Max. Contin- uous	Max. Inter- mittent
		[200] 14	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1400] 97	[1600] 110	[1800] 124			
Flow LPM [GPM]	[2] 7,6	[79] 9 127	[169] 19 125	[260] 29 123	[305] 34 121	[437] 49 117	[526] 59 114	[616] 70 109	[704] 80 103	[796] 90 96	[1055] 119 65		
	[4] 15,1	[76] 9 254	[168] 19 254	[257] 29 251	[307] 35 249	[441] 50 246	[529] 60 241	[620] 70 236	[710] 80 230	[800] 90 224	[1065] 120 193		
	[6] 22,7	[73] 8 381	[161] 18 381	[252] 28 380	[303] 34 377	[439] 50 373	[529] 60 368	[618] 70 364	[709] 80 358	[802] 91 349	[1069] 121 319		
	[8] 30,3	[64] 7 508	[151] 17 508	[243] 27 508	[294] 33 504	[428] 48 500	[519] 59 496	[609] 69 491	[701] 79 484	[794] 90 476	[1076] 122 446		
	[10] 37,9	[57] 6 635	[141] 16 635	[234] 26 634	[283] 32 630	[419] 47 626	[512] 58 621	[602] 68 614	[693] 78 608	[786] 89 601	[1071] 121 571		
	[12] 45,4	[45] 5 762	[131] 15 762	[227] 26 762	[274] 31 757	[409] 46 753	[505] 57 747	[593] 67 741	[684] 77 734	[778] 88 728	[1058] 120 694		
	[14] 53,0	[33] 4 889	[118] 13 889	[213] 24 887	[266] 30 882	[396] 45 877	[492] 56 872	[583] 66 866	[676] 76 860	[770] 87 851	[1055] 119 813		
	Max. Contin- uous 56,8	[29] 3 953	[111] 13 953	[205] 23 951	[260] 29 945	[389] 44 940	[486] 55 935	[576] 65 929	[670] 76 921	[765] 86 913	[1055] 119 872		
	Max. Inter- mittent 75,7	[20] 2 1080	[98] 11 1080	[192] 22 1077	[252] 28 1071	[377] 43 1067	[475] 54 1062	[567] 64 1055	[660] 75 1049	[757] 86 1040			
		[111] 13 953 Torque [lb-in] Nm Speed RPM											

		74 cm ³ /r [4.5 in ³ /r] Δ Pressure Bar [PSI] Continuous										Max. Contin- uous	Max. Inter- mittent
		[200] 14	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1400] 97	[1600] 110	[1800] 124			
Flow LPM [GPM]	[2] 7,6	[103] 12 101	[220] 25 99	[339] 38 98	[454] 51 96	[569] 64 93	[685] 77 90	[801] 91 86	[916] 103 81	[1036] 117 76	[1373] 155 51		
	[4] 15,1	[99] 11 203	[219] 25 201	[335] 38 199	[457] 52 197	[574] 65 194	[689] 78 191	[808] 91 187	[925] 105 182	[1042] 118 177	[1386] 157 153		
	[6] 22,7	[94] 11 305	[210] 24 303	[328] 37 301	[451] 51 298	[571] 65 296	[689] 78 292	[805] 91 288	[924] 104 283	[1044] 118 276	[1392] 157 252		
	[8] 30,3	[86] 10 406	[196] 22 404	[319] 36 402	[438] 49 399	[558] 63 396	[676] 76 393	[793] 90 388	[913] 103 383	[1033] 117 377	[1401] 158 352		
	[10] 37,9	[74] 8 507	[183] 21 505	[310] 35 502	[422] 48 499	[545] 62 496	[667] 75 492	[784] 89 486	[903] 102 482	[1024] 116 476	[1394] 158 452		
	[12] 45,4	[58] 7 608	[171] 19 606	[295] 33 603	[408] 46 600	[533] 60 596	[657] 74 591	[773] 87 587	[891] 101 581	[1013] 114 576	[1377] 156 549		
	[14] 53,0	[43] 5 709	[154] 17 706	[277] 31 702	[396] 45 698	[515] 58 694	[640] 72 691	[760] 86 686	[880] 99 681	[1002] 113 674	[1374] 155 643		
	Max. Contin- uous 56,8	[36] 4 760	[145] 16 757	[268] 30 753	[387] 44 749	[506] 57 744	[632] 71 740	[750] 85 735	[873] 99 729	[996] 113 723	[1373] 155 690		
	Max. Inter- mittent 75,7	[20] 2 904	[121] 14 902	[233] 26 898	[351] 40 895	[482] 54 891	[609] 69 887	[725] 82 882	[856] 97 877	[981] 111 869			

H Series (101-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range printed in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production.

	Continuous
	Intermittent

		97 cm ³ /r [5.9 in ³ /r] Δ Pressure Bar [PSI] Continuous								Max. Contin- uous	Max. Inter- mittent
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2400]
		14	28	41	55	69	83	97	110	124	165
Flow LPM [GPM]	[2]	[134]	[292]	[442]	[593]	[746]	[899]	[1054]	[1209]	[1365]	[1806]
	7,6	15 78	33 76	50 75	67 73	84 71	102 68	119 65	137 61	154 55	204 33
	[4]	[131]	[281]	[436]	[596]	[750]	[903]	[1059]	[1212]	[1367]	[1828]
	15,1	15 156	32 155	49 153	67 151	85 149	102 147	120 143	137 139	154 134	207 113
	[6]	[126]	[269]	[425]	[588]	[747]	[900]	[1054]	[1206]	[1368]	[1823]
	22,7	14 234	30 233	48 231	66 230	84 228	102 224	119 221	136 217	155 210	206 189
	[8]	[110]	[246]	[408]	[566]	[718]	[873]	[1023]	[1177]	[1339]	[1829]
	30,3	12 312	28 311	46 310	64 308	81 305	99 303	116 300	133 295	151 291	207 269
	[10]	[96]	[231]	[392]	[539]	[699]	[859]	[1005]	[1156]	[1318]	[1821]
	37,9	11 390	26 389	44 387	61 385	79 383	97 380	114 376	131 373	149 368	206 346
Max. Contin- uous	[12]	[77]	[218]	[378]	[522]	[681]	[844]	[990]	[1142]	[1301]	[1792]
	45,4	9 468	25 467	43 465	59 463	77 460	95 457	112 453	129 449	147 445	202 421
	[14]	[60]	[197]	[358]	[513]	[662]	[828]	[973]	[1131]	[1293]	[1776]
	53,0	7 546	22 544	40 542	58 539	75 537	94 535	110 531	128 526	146 521	201 499
	[15]	[52]	[189]	[346]	[495]	[651]	[819]	[963]	[1126]	[1286]	[1778]
	56,8	6 585	21 583	39 581	56 578	74 575	93 573	109 569	127 564	145 559	201 536
	Max. Inter- mittent	[20]	[25]	[157]	[311]	[455]	[625]	[790]	[941]	[1110]	[1272]
	75,7	3 701	18 700	35 697	51 694	71 691	89 688	106 684	125 681	144 674	

[189] } Torque [lb-in]
21 } Nm
583 } Speed RPM

		120 cm ³ /r [7.3 in ³ /r] Δ Pressure Bar [PSI] Continuous								Max. Contin- uous	Max. Inter- mittent
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2400]
		14	28	41	55	69	83	97	110	124	165
Flow LPM [GPM]	[2]	[162]	[357]	[544]	[736]	[927]	[1116]	[1305]	[1498]	[1687]	[2231]
	7,6	18 62	40 61	61 61	83 59	105 58	126 55	147 53	169 49	191 45	252 26
	[4]	[160]	[348]	[539]	[736]	[930]	[1119]	[1316]	[1506]	[1698]	[2268]
	15,1	18 125	39 124	61 123	83 121	105 120	126 119	149 116	170 114	192 110	256 90
	[6]	[155]	[338]	[530]	[729]	[923]	[1116]	[1310]	[1500]	[1699]	[2271]
	22,7	18 188	38 187	60 186	82 185	104 183	126 180	148 178	169 175	192 170	257 152
	[8]	[139]	[319]	[515]	[710]	[901]	[1094]	[1283]	[1476]	[1673]	[2278]
	30,3	16 250	36 250	58 249	80 247	102 245	124 243	145 241	167 237	189 233	257 216
	[10]	[121]	[303]	[497]	[686]	[883]	[1081]	[1267]	[1460]	[1655]	[2268]
	37,9	14 313	34 312	56 311	78 309	100 308	122 306	143 302	165 300	187 296	256 278
Max. Contin- uous	[12]	[102]	[288]	[480]	[664]	[862]	[1060]	[1246]	[1440]	[1640]	[2232]
	45,4	12 375	33 374	54 373	75 371	97 370	120 367	141 365	163 361	185 358	252 338
	[14]	[78]	[263]	[458]	[652]	[841]	[1041]	[1228]	[1420]	[1616]	[2213]
	53,0	9 438	30 437	52 435	74 433	95 431	118 430	139 427	160 423	183 419	250 401
	[15]	[67]	[253]	[446]	[632]	[828]	[1030]	[1214]	[1411]	[1608]	[2205]
	56,8	8 469	29 468	50 466	71 464	94 462	116 460	137 458	159 454	182 450	249 430
	Max. Inter- mittent	[20]	[20]	[202]	[384]	[581]	[778]	[971]	[1169]	[1356]	[1559]
	75,7	2 626	23 624	43 621	66 618	88 617	110 614	132 611	153 609	176 606	

H Series (101-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range printed in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production.

Continuous

Intermittent

146 cm³/r [8.9 in³/r]											Max. Contin- uous	Max. Inter- mittent
Δ Pressure Bar [PSI]												
Continuous												
Flow LPM [GPM]		[200] 14	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1400] 97	[1600] 110	[1700] 117	[2300] 159	
	[2] 7,6	[198] 22 51	[435] 49 50	[664] 75 50	[897] 101 49	[1130] 128 47	[1361] 154 45	[1591] 180 43	[1827] 206 40	[1942] 219 39	[2611] 295 24	
	[4] 15,1	[196] 22 103	[424] 48 102	[657] 74 101	[898] 101 99	[1133] 128 99	[1365] 154 97	[1604] 181 95	[1836] 207 93	[1954] 221 92	[2648] 299 78	
	[6] 22,7	[189] 21 154	[412] 47 153	[646] 73 152	[889] 100 151	[1125] 127 150	[1361] 154 148	[1598] 181 146	[1829] 207 143	[1951] 220 141	[2653] 300 128	
	[8] 30,3	[169] 19 205	[389] 44 205	[628] 71 204	[866] 98 203	[1098] 124 201	[1333] 151 200	[1564] 177 197	[1799] 203 195	[1919] 217 193	[2649] 299 180	
	[10] 37,9	[148] 17 257	[369] 42 256	[605] 68 255	[836] 94 253	[1076] 122 252	[1318] 149 251	[1544] 174 248	[1780] 201 246	[1899] 215 244	[2789] 315 231	
	[12] 45,4	[125] 14 308	[351] 40 307	[586] 66 306	[810] 92 305	[1051] 119 303	[1293] 146 301	[1519] 172 299	[1756] 198 296	[1878] 212 295	[2606] 294 281	
	[14] 53,0	[95] 11 359	[321] 36 358	[558] 63 357	[795] 90 355	[1026] 116 354	[1290] 146 352	[1497] 169 350	[1731] 196 347	[1851] 209 346	[2580] 292 331	
	[15] 56,8	[82] 9 85	[308] 35 384	[544] 61 383	[771] 87 381	[1010] 114 379	[1256] 142 378	[1480] 167 375	[1720] 194 373	[1840] 208 371	[2569] 290 356	
	Max. Contin- uous											
Max. Inter- mittent	[20] 75,7	[24] 3 513	[246] 28 512	[468] 53 509	[708] 80 507	[948] 107 506	[1184] 134 504	[1425] 161 501	[1653] 187 499	[1780] 201 498		

H Series (101-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range printed in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production.

	Continuous
	Intermittent

185 cm³/r [11.3 in³/r]

Δ Pressure Bar [PSI]

Continuous

Max.
Contin-
uous

Max.
Inter-
mittent

	[200] 14	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1400] 97	[1600] 110	[2150] 148
[2]	[257] 29 40	[554] 63 40	[847] 96 39	[1150] 130 38	[1447] 163 37	[1739] 196 36	[2035] 230 33	[2320] 262 29	[3103] 351 12
[4]	[254] 29 81	[546] 62 81	[845] 95 80	[1145] 129 79	[1448] 164 78	[1744] 197 77	[2049] 232 76	[2343] 265 74	[3147] 356 63
[6]	[246] 28 121	[540] 61 121	[834] 94 120	[1137] 128 120	[1434] 162 119	[1736] 196 117	[2036] 230 115	[2337] 264 112	[3151] 356 100
[8]	[224] 25 162	[520] 59 162	[820] 93 161	[1117] 126 160	[1414] 160 159	[1716] 194 157	[2014] 228 155	[2315] 262 152	[3133] 354 140
[10]	[202] 23 202	[499] 56 202	[793] 90 201	[1095] 124 201	[1394] 158 200	[1699] 192 198	[1997] 226 196	[2299] 260 193	[3112] 352 181
[12]	[176] 20 243	[475] 54 242	[767] 87 242	[1063] 120 241	[1368] 155 240	[1664] 188 238	[1969] 222 236	[2268] 256 234	[3088] 349 222
[14]	[140] 16 283	[443] 50 283	[735] 83 282	[1035] 117 281	[1340] 151 280	[1637] 185 279	[1936] 219 277	[2227] 252 274	[3051] 345 262
Max. Contin- uous	[120] 14 304	[425] 48 303	[719] 81 302	[1014] 115 301	[1320] 149 300	[1618] 183 299	[1914] 216 297	[2205] 249 294	[3023] 342 283
Max. Inter- mittent	[20] 3 405	[321] 36 404	[612] 69 402	[911] 103 401	[1211] 137 400	[1504] 170 398	[1795] 203 397		

231 cm³/r [14.1 in³/r]

Δ Pressure Bar [PSI]

Continuous

Max.
Contin-
uous

Max.
Inter-
mittent

	[200] 14	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1400] 97	[1450] 100	[2000] 138
[2]	[338] 38 32	[707] 80 32	[1074] 121 31	[1456] 165 30	[1827] 206 30	[2192] 248 28	[2572] 291 26	[2657] 300 25	
[4]	[328] 37 65	[695] 79 65	[1076] 122 64	[1447] 163 63	[1827] 206 62	[2201] 249 62	[2577] 291 60	[2669] 302 60	[3671] 415 50
[6]	[317] 36 97	[687] 78 97	[1057] 119 97	[1434] 162 96	[1811] 205 95	[2186] 247 94	[2555] 289 92	[2650] 299 91	[3668] 414 80
[8]	[289] 33 130	[659] 74 130	[1038] 117 130	[1406] 159 129	[1777] 201 128	[2160] 244 127	[2531] 286 124	[2625] 297 124	[3644] 412 112
[10]	[265] 30 162	[631] 71 162	[1004] 113 162	[1381] 156 162	[1751] 198 160	[2131] 241 158	[2510] 284 156	[2602] 294 156	[3608] 408 145
[12]	[230] 26 195	[599] 68 195	[968] 109 194	[1345] 152 194	[1722] 195 193	[2088] 236 192	[2480] 280 189	[2571] 290 189	[3571] 403 178
[14]	[191] 22 227	[563] 64 227	[927] 105 227	[1299] 147 226	[1686] 190 226	[2058] 233 224	[2428] 274 222	[2519] 285 221	[3532] 399 212
Max. Contin- uous	[167] 19 243	[538] 61 243	[904] 102 243	[1279] 145 242	[1661] 188 242	[2030] 229 240	[2404] 272 238	[2493] 282 238	[3488] 394 229
Max. Inter- mittent	[20] 3 324	[29] 46 324	[411] 89 323	[785] 130 322	[1152] 172 322	[1520] 212 320	[1877] 251 319	[2222] 262 318	

[538]
61
243 } Torque [lb-in]
Nm
Speed RPM

H Series (101-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range printed in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production.

 Continuous
 Intermittent

		293 cm ³ /r [17.9 in ³ /r] Δ Pressure Bar [PSI] Continuous							Max. Contin- uous	Max. Inter- mittent
		[200] 14	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1350] 93		[1800] 124
Flow LPM [GPM]	[2] 7,6	[427] 48 26	[893] 101 25	[1361] 154 25	[1829] 207 24	[2293] 259 22	[2672] 302 16	[2977] 336 13		
	[4] 15,1	[419] 47 51	[886] 100 51	[1362] 154 51	[1833] 207 50	[2305] 260 49	[2771] 313 47	[3110] 351 44	[4107] 464 22	
	[6] 22,7	[402] 45 77	[872] 99 77	[1342] 152 76	[1819] 206 76	[2291] 259 74	[2757] 312 71	[3098] 350 68	[4121] 466 54	
	[8] 30,3	[367] 41 102	[838] 95 102	[1316] 149 102	[1785] 202 101	[2252] 254 100	[2723] 308 98	[3070] 347 95	[4086] 462 84	
	[10] 37,9	[332] 38 128	[803] 91 128	[1276] 144 128	[1749] 198 127	[2215] 250 126	[2684] 303 123	[3034] 343 120	[4061] 459 108	
	[12] 45,4	[289] 33 153	[760] 86 153	[1230] 139 153	[1706] 193 153	[2177] 246 151	[2634] 298 149	[2989] 338 146	[4012] 453 135	
	[14] 53,0	[241] 27 179	[712] 80 179	[1176] 133 179	[1650] 186 179	[2126] 240 177	[2592] 293 175	[2935] 332 172	[3963] 448 161	
	Max. Contin- uous 56,8	[211] 24 192	[683] 77 192	[1149] 130 192	[1623] 183 191	[2096] 237 190	[2558] 289 188	[2905] 328 185	[3914] 442 174	
	Max. Inter- mittent 75,7	[43] 5 256	[527] 60 256	[1001] 113 255	[1463] 165 255	[1919] 217 254	[2375] 268 252	[2720] 307 249		

		370 cm ³ /r [22.6 in ³ /r] Δ Pressure Bar [PSI] Continuous							Max. Contin- uous	Max. Inter- mittent
		[200] 14	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1250] 86		[1500] 103
Flow LPM [GPM]	[2] 7,6	[537] 61 20	[1121] 127 20	[1715] 194 20	[2285] 258 19	[2862] 323 16				
	[4] 15,1	[532] 60 40	[1123] 127 40	[1715] 194 40	[2308] 261 39	[2893] 327 38	[3467] 392 36	[3604] 407 35	[4274] 483 27	
	[6] 22,7	[508] 57 61	[1100] 124 61	[1693] 191 61	[2294] 259 60	[2884] 326 58	[3458] 391 55	[3598] 407 53	[4283] 484 47	
	[8] 30,3	[463] 52 81	[1060] 120 81	[1661] 188 81	[2255] 255 80	[2840] 321 79	[3414] 386 76	[3557] 402 74	[4254] 481 68	
	[10] 37,9	[414] 47 101	[1017] 115 101	[1613] 182 101	[2203] 249 101	[2788] 315 99	[3363] 380 96	[3506] 396 94	[4212] 476 88	
	[12] 45,4	[363] 41 121	[960] 108 121	[1553] 175 121	[2152] 243 121	[2737] 309 119	[3305] 373 116	[3446] 389 115	[4152] 469 109	
	[14] 53,0	[303] 34 142	[897] 101 142	[1484] 168 142	[2086] 236 142	[2667] 301 140	[3246] 367 137	[3386] 383 136	[4092] 462 130	
	Max. Contin- uous 56,8	[266] 30 152	[862] 97 152	[1452] 164 152	[2050] 232 152	[2630] 297 150	[3206] 362 148	[3347] 378 147	[4054] 458 140	
	Max. Inter- mittent 75,7	[20] 7 202	[61] 76 202	[1269] 143 202	[1847] 209 202	[2410] 272 202	[2987] 337 199	[3119] 352 198		

		739 cm ³ /r [45.1 in ³ /r] Δ Pressure Bar [PSI] Continuous				Max. Contin- uous	Max. Inter- mittent
		[200] 14	[400] 28	[600] 41		[800] 55	
Flow LPM [GPM]	[2] 7,6	[1080] 122 10	[2250] 254 10	[3440] 389 10		[4570] 516 9	
	[4] 15,1	[1070] 121 20	[2250] 254 20	[3440] 389 19		[4600] 520 18	
	[6] 22,7	[1020] 115 30	[2200] 249 30	[3390] 383 29		[4590] 519 27	
	[8] 30,3	[945] 107 40	[2135] 241 40	[3330] 376 39		[4515] 510 37	
	[10] 37,9	[840] 95 50	[2050] 232 50	[3250] 367 48		[4430] 501 46	
	[12] 45,4	[740] 84 60	[1945] 220 59	[3130] 354 58		[4320] 488 55	
	[14] 53,0	[630] 71 69	[1820] 206 68	[3005] 340 68		[4195] 474 66	
	Max. Contin- uous 56,8	[540] 61 74	[1735] 196 74	[2905] 328 73		[4130] 467 72	
	Max. Inter- mittent 75,7	[143] 16 99	[1350] 153 98	[2565] 290 97		[3705] 419 96	

[862]
97
152 } Torque [lb-in]
Nm
Speed RPM

H Series (101-)

Dimensions

(Refer to pages B-4-19 thru B-4-22 for shaft and port dimensions.)

Standard Rotation Viewed from Shaft End

Port A Pressurized — CW

Port B Pressurized — CCW

Note:


Mounting surface flatness requirement is ∇ , 13 mm [.005 inch] Max.

Note:


End ported motor pressure is derated. Reference page B-2-2 for ratings.

B-2

2 Bolt Flange

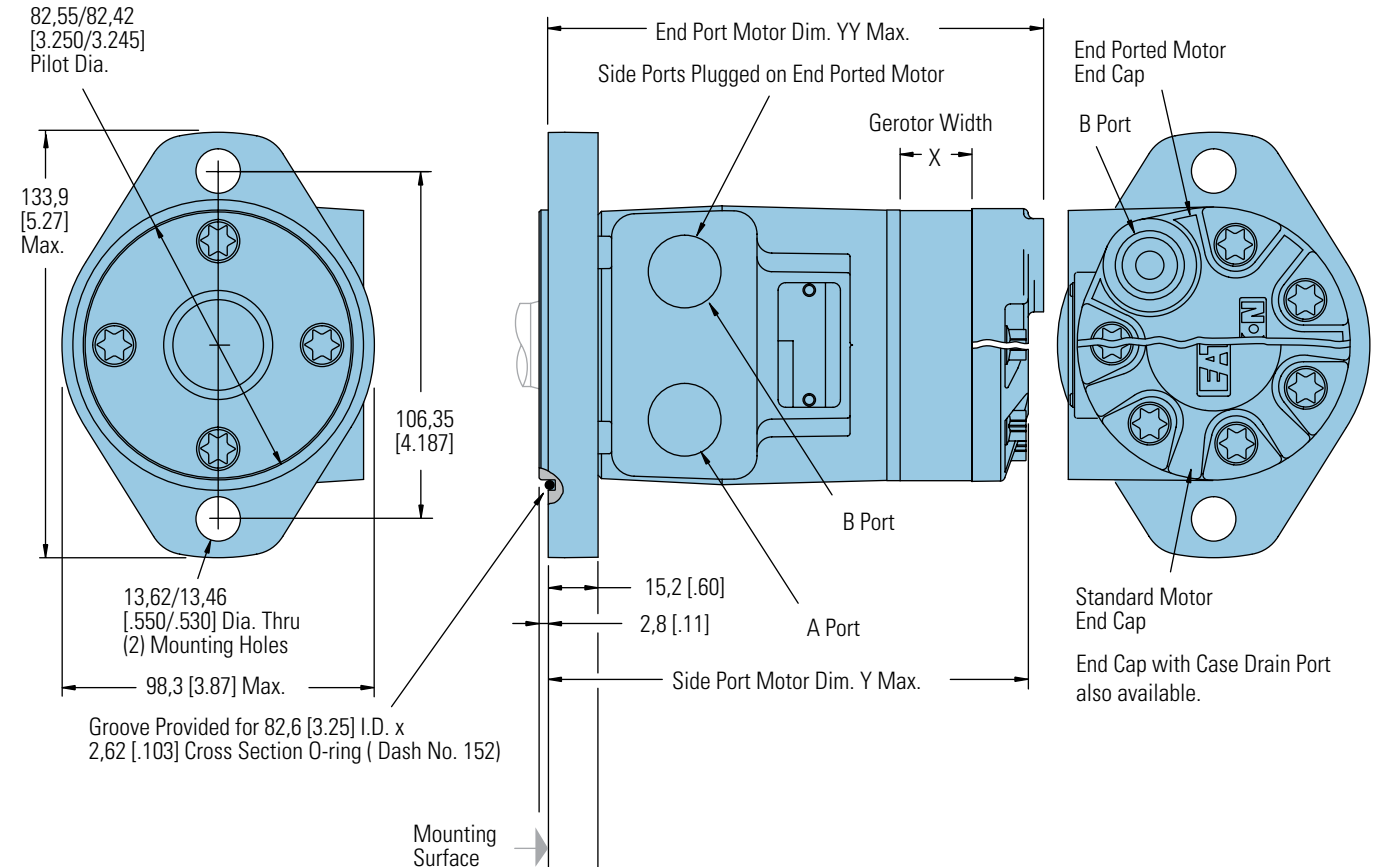

4 Bolt Flange

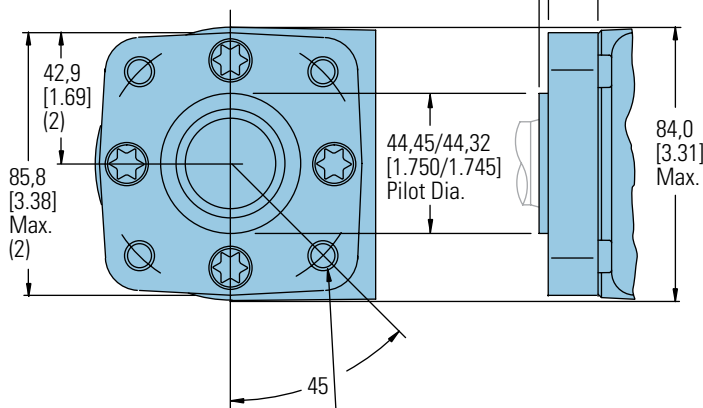

3/8-16 UNC (15,2 [.60] Max. Bolt Thread Engagement) Mounting Holes (4) Equally Spaced on 82,6 [3.25] Dia. Bolt Circle or
M10 x 1,5 (15,2 [.60] Max. Bolt Thread Engagement) Mounting Holes (4) Equally Spaced on 82,6 [3.25] Dia. Bolt Circle

2 AND 4 BOLT FLANGE

Displacement cm ³ /r [in ³ /r]	X mm [inch]	Y mm [inch]	YY mm [inch]
36 [2.2]	6,4 [.25]	132,1 [5.20]	138,5 [5.45]
46 [2.8]	6,4 [.25]	132,1 [5.20]	138,5 [5.45]
59 [3.6]	10,2 [.40]	135,9 [5.35]	142,3 [5.60]
74 [4.5]	10,2 [.40]	135,9 [5.35]	142,3 [5.60]
97 [5.9]	13,2 [.52]	139,0 [5.47]	145,3 [5.72]
120 [7.3]	16,5 [.65]	142,3 [5.60]	148,6 [5.85]
146 [8.9]	20,1 [.79]	145,8 [5.74]	152,2 [5.99]
159 [9.7]	21,9 [.86]	147,6 [5.81]	154,0 [6.06]
185 [11.3]	25,4 [1.00]	151,2 [5.95]	157,5 [6.20]
231 [14.1]	31,8 [1.25]	157,5 [6.20]	
293 [17.9]	40,4 [1.59]	166,2 [6.54]	
370 [22.6]	50,8 [2.00]	176,6 [6.95]	
739 [45.1]	101,6 [4.00]	227,4 [8.95]	

H Series (101-)

Product Numbers

Use digit prefix —101- plus four digit number from charts for complete product number—Example 101-1001. Orders will not be accepted without three digit prefix.

2 Bolt Flange

SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER												
		36 [2.2]	46 [2.8]	59 [3.6]	74 [4.5]	97 [5.9]	120 [7.3]	146 [8.9]	159 [9.7]	185 [11.3]	231 [14.1]	293 [17.9]	370 [22.6]	740 [45.0]
1 in. Straight w/Woodruff key	7/8-14 O-Ring	101-1700	-1033	-1701	-1034	-1035	-1702	-1703	-1036	-1037	-1038	-1039	-1040	—
	1/2 NPTF	101-1704	-1025	-1705	-1026	-1027	-1706	-1707	-1028	-1029	-1030	-1031	-1032	—
	Manifold*	101-1708	-1041	-1709	-1042	-1043	-1710	-1711	-1044	-1045	-1046	-1047	-1048	—
1 in. SAE 6B Splined	7/8-14 O-Ring	101-1721	-1081	-1722	-1082	-1083	-1723	-1724	-1084	-1085	-1086	-1087	-1088	—
	1/2 NPTF	101-1725	-1073	-1726	-1074	-1075	-1727	-1728	-1076	-1077	-1078	-1079	-1080	—
	Manifold*	101-1729	-1089	-1730	-1090	-1091	-1731	-1732	-1092	-1093	-1094	-1095	-1096	—
1 in. Straight w/.31 Dia. Crosshole	7/8-14 O-Ring	101-1796	-1797	-1798	-1799	-1800	-1801	-1802	-1803	—	—	—	—	—
	1/2 NPTF	101-1804	-1805	-1806	-1807	-1808	-1870	-1809	-1810	—	—	—	—	—
	Manifold*	101-1811	-1812	-1813	-1814	-1815	-1816	-1817	-1818	—	—	—	—	—
1 in. Straight w/.40 Dia. Crosshole	7/8-14 O-Ring	101-1819	-1323	-1820	-1324	-1325	-1821	-1822	-1326	—	—	—	—	—
	1/2 NPTF	101-1823	-1319	-1824	-1320	-1825	-1826	-1827	-1828	—	—	—	—	—
	Manifold*	101-1829	-1463	-1830	-1831	-1832	-1833	-1834	-1871	—	—	—	—	—

101-1834

4 Bolt Flange

SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER												
		36 [2.2]	46 [2.8]	59 [3.6]	74 [4.5]	97 [5.9]	120 [7.3]	146 [8.9]	159 [9.7]	185 [11.3]	231 [14.1]	293 [17.9]	370 [22.6]	740 [45.0]
1 in. Straight w/Woodruff key O-Ring	7/8-14 O-Ring	101-1749	-1009	-1750	-1010	-1011	-1751	-1752	-1012	-1013	-1014	-1015	-1016	—
	1/2 NPTF	101-1753	-1001	-1754	-1002	-1003	-1755	-1756	-1004	-1005	-1006	-1007	-1008	—
	Manifold*	101-1757	-1017	-1758	-1018	-1019	-1759	-1760	-1020	-1021	-1022	-1023	-1024	—
1 in. SAE 6B Splined	7/8-14 O-Ring	101-1761	-1057	-1762	-1058	-1059	-1872	-1763	-1060	-1061	-1062	-1063	-1064	—
	1/2 NPTF	101-1764	-1049	-1765	-1050	-1051	-1766	-1767	-1052	-1053	-1054	-1055	-1056	—
	Manifold*	101-1768	-1065	-1769	-1066	-1067	-1770	-1771	-1068	-1069	-1070	-1071	-1072	—
1 in. Straight w/.31 Dia. Crosshole	7/8-14 O-Ring	101-1835	-1836	-1837	-1838	-1839	-1840	-1841	-1842	—	—	—	—	—
	1/2 NPTF	101-1843	-1497	-1844	-1449	-1352	-1845	-1846	-1847	—	—	—	—	—
	Manifold*	101-1848	-1466	-1849	-1459	-1850	-1851	-1852	-1853	—	—	—	—	—
1 in. Straight w/.40 Dia. Crosshole	7/8-14 O-Ring	101-1854	-1311	-1855	-1856	-1857	-1858	-1859	-1860	—	—	—	—	—
	1/2 NPTF	101-1861	-1313	-1862	-1312	-1314	-1863	-1864	-1315	—	—	—	—	—
	Manifold*	101-1865	-1305	-1866	-1306	-1307	-1867	-1868	-1869	—	—	—	—	—

101-1868

4 Bolt Flange with Corrosion Protection

SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER												
		36 [2.2]	46 [2.8]	59 [3.6]	74 [4.5]	97 [5.9]	120 [7.3]	146 [8.9]	159 [9.7]	185 [11.3]	231 [14.1]	293 [17.9]	370 [22.6]	740 [45.0]
1 in. Straight w/ Woodruff Key	1/2 NPTF	101-2032	-2014	-2093	-2027	-2013	-2094	-2095	-2015	-2028	-2029	-2030	-2031	—
	Manifold*		-2067							-2068	-2069			

*Manifold product numbers shown are for motors with four 5/16-18 port face mounting threads. Manifold, manifold mounting O-Rings and bolts are NOT included.

For H Series Motors with a configuration Not Shown in the charts above: Use the model code system on page B-2-11 to specify the product in detail.

H Series (101-)

Model Code

The following 25-digit coding system has been developed to identify all of the configuration options for the H motor. Use this model code to specify a motor with the desired features. All 25-digits of the code must be present when ordering. You may want to photocopy the matrix below to ensure that each number is entered in the correct box.

M	H 0		* * *			* *		* *		* *		*	*	*	* *		*	0	* *		*	*	0	J
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25

B-2

1 Product

M - Motor

2, 3 Series

H0 - H Motor

4, 5, 6 Displacement cm³/r [in³/r]

022 - 36 [2.2]†

028 - 46 [2.8]

035 - 58 [3.5]†

045 - 74 [4.5]

059 - 96 [5.9]

073 - 120 [7.3]

089 - 146 [8.9]

097 - 159 [9.7]

113 - 185 [11.3]

141 - 231 [14.1]

179 - 294 [17.9]

226 - 370 [22.6]

451 - 739 [45.1]

†The H Series motors with displacement code "022" or "035" must also specify free running gerotor (option "AA" in position 11,12).

7, 8 Mounting Type

AA - 2 Bolt (Standard)
82.50 [3.248] Dia. x 3.05 [.120] Pilot, 13.59 [.535] Dia. Mounting Holes on 106.35 [4.187] Dia. B.C.

BA - 4 Bolt (Standard)
44.40 [1.748] Dia. x 3.05 [.120] Pilot, .375-16 UNC-2B Mounting Holes on 82.55 [3.250] Dia. B.C.

CA - 2 Bolt (Standard)
82.50 [3.248] Dia. x 6.10 [.240] Pilot, 10.41 [.410] Dia. Mounting Holes on 106.35 [4.187] Dia. B.C. (SAE A)

DD - 2 Bolt (Standard)
101.60 [4.000] Dia. x 6.10 [.240] Pilot, 14.35 [.565] Dia. Mounting Holes on 146.05 [5.750] Dia. B.C. (SAE B)

FA - 4 Bolt (Standard)
44.40 [1.748] Dia. x 3.05 [.120] Pilot, M10 x 1.5-6H Mounting Holes on 82.55 [3.250] Dia. B.C.

GA - 4 Bolt (Round) 82.50 [3.248] Dia. x 6.35 [.250] Pilot, 19.05 [.750] Dia. Mounting Holes on 109.48 [4.310] Dia. B.C.

MA - 2 Bolt (Standard)
82.50 [3.248] Dia. x 8.13 [.320] Pilot, 13.59 [.535] Dia. Mounting Holes on 106.35 [4.187] Dia. B.C., w/o O-ring Groove

9, 10 Output Shaft

01 - 25.4 [1.00] Dia. Straight, Woodruff Key, .250-20 UNC-2B Hole in Shaft End

02 - 25.4 [1.00] Dia. SAE 6B Spline, .250-20 UNC-2B Hole in Shaft End

07 - 25.4 [1.00] Dia. Straight, 8.03 [.316] Dia. Cross Hole 11.2 [.44] from End, 5.6 [.22] Extra Length

08 - 25.4 [1.00] Dia. Straight, 10.31 [.406] Dia. Cross Hole 15.7 [.62] from End, .250-20 UNC-2B Hole in Shaft End

16 - 22.22 [.875] Dia. SAE 13 Tooth Spline (SAE B)

17 - 22.22 [.875] Dia. Straight, 6.4 [.25] x 19.0 [.75] Square Key (SAE B)

18 - 25.4 [1.00] Dia. Tapered, Woodruff Key and Nut, 34.92 [1.375] Taper Length

24 - 25.00 [.984] Dia. Straight, 8.00 [.315] KEY, M8 x 1.25-6H Hole in Shaft End

39 - 25.00 [.984] Dia. Straight (k6), 8.00 [.315] Key, M8 x 1.25-6H Hole in Shaft End

11, 12 Ports

AA - .875-14 UNF-2B SAE O-Ring Ports

AB - .500-14 NPTF Dry Seal Pipe Thread Ports

AC - Manifold Ports (.3125-18 UNC-2B Mounting Holes)

AD - Manifold Ports (M8 x 1.25-6H Mounting Holes)

AF - G 1/2 BSP Straight Thread Ports

EB†† - End Ports: .750-16 UNF-2B SAE O-Ring Ports

EC†† - End Ports: G 1/2 BSP Straight Thread Ports

†† Note: End ported motor pressure is derated. Reference page B-2-2 for ratings.

13 Case Flow Options

0 - None

1 - .4375-20 UNF-2B SAE O-Ring Port (End Cap)

2 - G 1/4 BSP Straight THD Port (End Cap)

A - Internal Check Valves

14 Gerotor Options

0 - None

A - Free Running

15 Shaft Options

0 - None

N - Electroless Nickel Plated

16, 17 Seal Options

00 - Standard Seals

02 - Seal Guard

03 - Viton Seals

04 - Viton Shaft Seal

05 - Vented Two-Stage Seal

07 - High Pressure Shaft Seal

18 Speed Sensor Options

0 - None

A - Digital Speed Pickup

(15 Pulse), No Lead Wire with M12 Connector (A=Power, B=Common, C=Signal)

B - Magnetic Speed Pickup (60 Pulse by Quadrature), No Lead Wire with M12 Connector (A=Power, B=Common, C=Signal)

19 Manifold Block Options

0 - None

* - Contact your Eaton Sales Representative for available options.

20, 21 Special Features (Hardware)

00 - None

AB - Low Speed Valving

SS - Stainless Steel Flange Bolts

22 Special Features (Assembly)

0 - None

1 - Reverse Rotation

2 - Flange Rotated 90°

23 Paint/ Special Packaging

0 - No Paint

A - Low Gloss Black Primer

D - Environmental Coated Gloss White

F - Environmental Coated Black

24 Eaton Assigned Code when Applicable

0 - Assigned Code

25 Eaton Assigned Design Code


J - Nine (9)

Feature in **bold** are preferred and allow for shorter lead time.

S Series (103-)

Highlights

New, improved design!

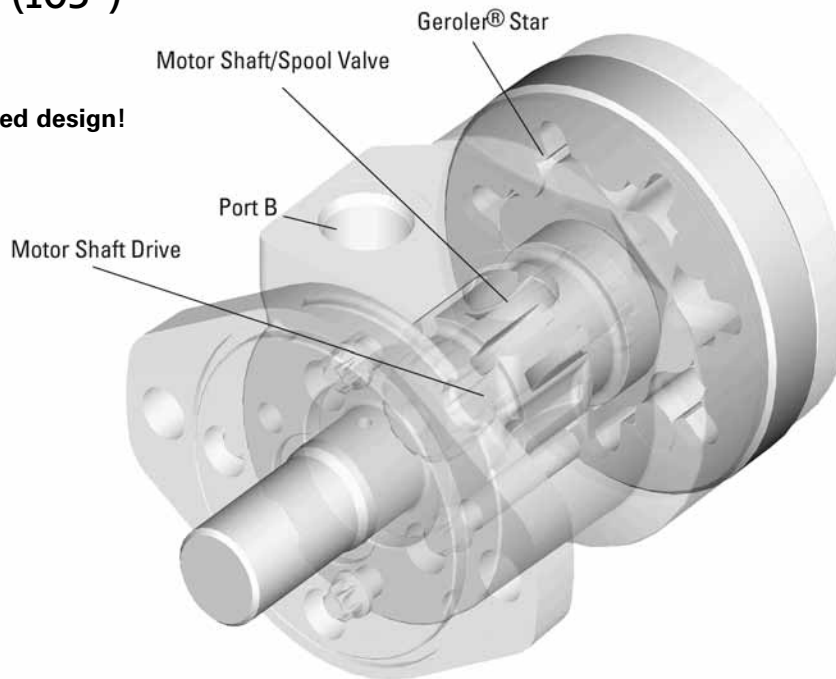

Description

The new improved Char-Lynn S Series motors with optimized Geroler geometry offers enhanced performance with reduced drive-running angle while retaining the overall package size of the original S series. Design improvements include upgraded steel end cap, O-Ring section seals, and optimized Geroler set. The Geroler set has precision-machined rollers in the outer ring which provide support with rolling contact between the star and ring. This improves mechanical efficiency, especially at start-up and at low speed conditions. Improvements incorporated into the latest S Series motor provide reliable leak-free performance and smooth operation at start-up conditions.

Specifications

Geroler Element	10 Displacements
Flow l/min [GPM]	55 [15] Continuous*** 75 [20] Intermittent**
Speed	Up to 963 RPM
Pressure bar [PSI]	135 [2000] Cont.*** 170 [2500] Inter.**
Torque Nm [lb-in]	528 [4672] Cont.*** 587 [5190] Inter.**

*** Continuous—(Cont.) Continuous rating, motor may be run continuously at these ratings.

** Intermittent—(Inter.) Intermittent operation, 10% of every minute.

Features:

- Constant clearance Geroler, design
- Three moving components (gerotor, drive, shaft)
- Optimized drive running angle
- Three-zone pressure design (inlet, return and case)
- Variety of displacements, shafts and mounts
- Special options to meet customer needs!

Benefits:

- High efficiency
- Smooth low speed operation!
- Extended motor life
- Design flexibility
- Ability to optimize designs for your application needs
- Extended leak-free performance

Applications:

- Agricultural augers, harvesters, seeders
- Car wash brushes
- Food processing
- Railroad maintenance equipment
- Machine tools
- Conveyors
- Industrial sweepers and floor polishers
- Saw mill works
- Turf equipment
- Concrete and asphalt equipment
- Skid steer attachments
- Many more

B-3



Conveyor



Casting




Amusement ride



Combine

S Series (103-)

Specifications

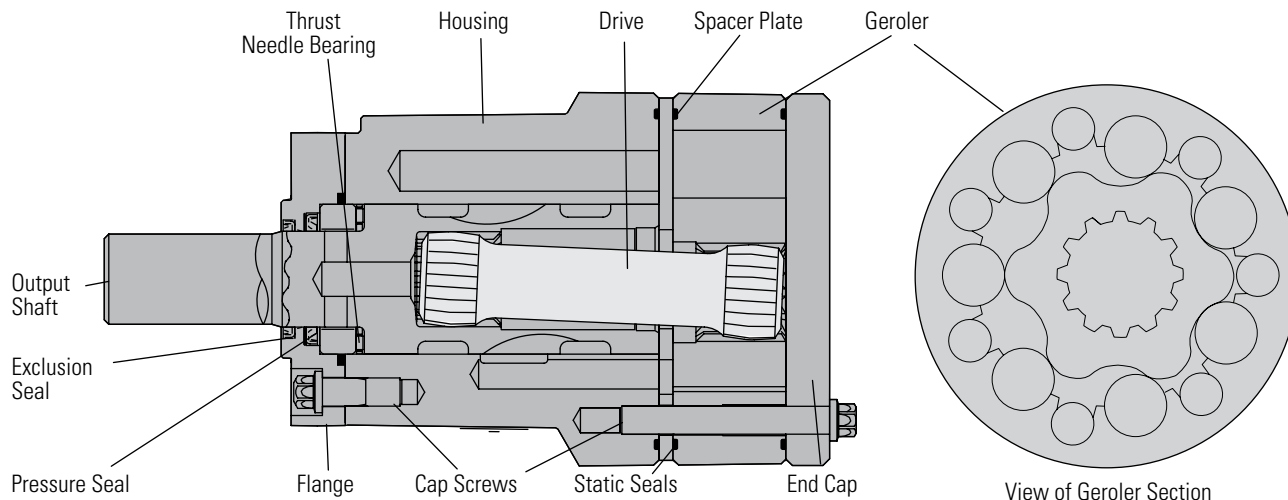

SPECIFICATION DATA – S MOTORS

Displ. cm ³ /r [in ³ /r]		59 [3.6]	75 [4.6]	97 [5.7]	120 [7.3]	144 [8.8]	166 [10.1]	187 [11.4]	225 [13.7]	298 [18.2]	372 [22.7]
Max. Speed (RPM) @ Continuous Flow		963	792	607	472	394	343	304	253	190	153
Flow LPM [GPM]	Continuous	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]
	Intermittent	68 [18]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]
Torque Nm [lb-in]	Continuous	115 [1021]	150 [1325]	183 [1623]	237 [2010]	265 [2347]	301 [2662]	333 [2950]	372 [3290]	491 [4345]	528 [4672]
	Intermittent	144 [1271]	186 [1649]	225 [1992]	292 [2582]	324 [2870]	360 [3191]	399 [3533]	434 [3843]	505 [4467]	587 [5200]
Min. Starting Torque Nm[lb-in]	@ Cont. Pressure	90 [800]	113 [1000]	148 [1310]	184 [1630]	212 [2050]	232 [2330]	263 [2670]	302 [2990]	338 [3270]	369 [3270]
	@ Int. Pressure	116 [1030]	146 [1290]	190 [1680]	236 [2090]	271 [2400]	289 [2560]	329 [2910]	374 [3310]	417 [3690]	438 [3880]
Pressure Δ Bar [Δ PSI]	Continuous	138 [2000]	138 [2000]	138 [2000]	138 [2000]	131 [1900]	131 [1900]	128 [1850]	117 [1700]	103 [1500]	90 [1300]
	Intermittent	172 [2500]	172 [2500]	172 [2500]	172 [2500]	162 [2350]	159 [2300]	155 [2250]	141 [2050]	124 [1800]	103 [1500]

A simultaneous maximum torque and maximum speed NOT recommended.

Note:

To assure best motor life, run motor for approximately one hour at 30% of rated pressure before application to full load. Be sure motor is filled with fluid prior to any load applications.

Maximum Inlet Pressure:

172 Bar [2500 PSI] without regard to Δ Bar [Δ PSI] and/or back pressure ratings or combination thereof.

6B Splined or Tapered shafts are recommended whenever operating above 282 NM [2500 lb-in] of torque, especially for those applications subject to frequent reversals.

Δ Pressure:

The true Δ bar [Δ PSI] between inlet port and outlet port

Continuous Rating:

Motor may be run continuously at these ratings

Intermittent Operation:

10% of every minute

Recommended Fluids:

Premium quality, anti-wear type hydraulic oil with a viscosity of not less than 70 SUS at operating temperature.

Recommended System Operating Temp.:

-34°C to 82°C [-30°F to 180°F]

Recommended Filtration:


per ISO Cleanliness Code 4406, level 20/18/13

S Series (103-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range printed in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production



S Motor 59 cm³/r [3.6 in³/r]

Δ Pressure Bar [PSI]

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2500]
	14	28	41	55	69	83	97	110	124	138	172
[2]	86	190	292	390	484	578	662	729	764	803	
	10	22	33	44	55	65	75	82	86	91	
7,6	126	121	115	107	97	85	75	63	45	24	
[4]	79	185	289	395	498	600	702	804	903	998	1156
	9	21	33	45	56	68	79	91	102	113	131
15,1	256	250	243	235	224	212	199	183	166	147	89
[6]	71	177	280	387	495	602	704	808	909	1011	1257
	8	20	32	44	56	68	80	91	103	114	142
22,7	383	377	369	360	349	336	320	302	284	266	207
[8]	62	166	274	379	488	594	699	806	907	1007	1264
	7	19	31	43	55	67	79	91	102	114	143
30,3	514	508	500	490	477	464	448	430	409	390	333
[10]	52	155	264	369	475	583	686	793	897	1000	1257
	6	17	30	42	54	66	78	90	101	113	142
37,9	642	635	628	617	605	591	575	557	538	517	461
[12]	38	141	248	354	462	568	674	777	884	987	1244
	4	16	28	40	52	64	76	88	100	111	141
45,4	772	764	757	747	736	722	706	687	670	648	592
[14]	21	125	231	337	445	551	658	763	868	972	1233
	2	14	26	38	50	62	74	86	98	110	139
53,0	900	893	885	876	866	852	836	819	798	778	721
[15]	8	116	223	328	434	543	648	756	862	965	1225
	1	13	25	37	49	61	73	85	97	109	138
56,8	482	958	949	940	929	915	900	882	863	842	784
[18]		86	191	296	403	511	617	726	831	935	1195
		10	22	33	46	58	70	82	94	106	135
68,1		1151	1139	1128	1117	1105	1090	1074	1054	1033	977

S Motor 75 cm³/r [4.6 in³/r]

Δ Pressure Bar [PSI]

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2500]
	14	28	41	55	69	83	97	110	124	138	172
[2]	91	218	343	467	590	708	815	900	981	1086	
	10	25	39	53	67	80	92	102	111	123	
7,6	93	89	81	75	66	59	43	21	23	16	
[4]	87	217	352	484	616	748	874	1001	1123	1236	1472
	10	25	40	55	70	85	99	113	127	140	166
15,1	193	188	181	173	163	150	139	125	107	89	37
[6]	82	219	355	492	627	763	898	1027	1155	1284	1590
	9	25	40	56	71	86	101	116	131	145	180
22,7	292	286	277	269	258	244	228	214	202	186	140
[8]	69	202	341	481	619	761	896	1032	1165	1296	1618
	8	23	38	54	70	86	101	117	132	146	183
30,3	390	384	375	364	355	342	326	309	295	276	230
[10]	56	193	330	471	610	751	887	1025	1162	1297	1628
	6	22	37	53	69	85	100	116	131	147	184
37,9	489	484	476	467	457	444	431	416	399	381	336
[12]	39	175	315	453	595	736	873	1011	1148	1284	1617
	4	20	36	51	67	83	99	114	130	145	183
45,4	587	582	573	564	552	540	526	510	494	476	427
[14]	12	153	290	431	571	716	856	993	1129	1265	1605
	1	17	33	49	65	81	97	112	128	143	181
53,0	343	680	673	665	654	641	628	613	594	578	533
[15]	9	143	281	424	567	708	846	985	1121	1259	1599
	1	16	32	48	64	80	96	111	127	142	181
56,8	491	729	723	714	704	690	675	661	644	628	580
[20]		82	220	362	505	645	784	922	1061	1200	1545
		9	25	41	57	73	89	104	120	136	175
75,7		970	963	957	948	935	921	906	888	871	825

[143] } Torque [lb-in]
16 } Nm
729 } Speed RPM

S Series (103-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range printed in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production

Continuous

Intermittent

S Motor 93 cm³/r [5.7 in³/r]

Δ Pressure Bar [PSI]

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2500]
	14	28	41	55	69	83	97	110	124	138	172
[2]	146	308	466	620	771	913	1031	1086	1176	1281	
	16	35	53	70	87	103	116	123	133	145	
7,6	76	72	64	55	48	34	22	7	4	1	
[4]	136	301	466	633	797	959	1116	1275	1430	1570	1798
	15	34	53	72	90	108	126	144	162	177	203
15,1	158	153	146	138	126	115	103	90	77	59	17
[6]	113	278	446	616	786	952	1116	1280	1444	1603	1971
	13	31	50	70	89	108	126	145	163	181	223
22,7	238	232	225	215	206	191	175	161	145	129	87
[8]	98	262	431	604	777	947	1112	1279	1446	1610	2006
	11	30	49	68	88	107	126	144	163	182	227
30,3	319	313	306	296	284	270	255	240	224	208	165
[10]	81	246	415	590	763	935	1100	1271	1439	1604	2012
	9	28	47	67	86	106	124	144	163	181	227
37,9	400	394	388	378	366	353	340	324	306	288	244
[12]	65	232	401	574	746	916	1081	1255	1425	1591	2001
	7	26	45	65	84	103	122	142	161	180	226
45,4	481	476	469	460	448	435	423	408	394	374	326
[14]	42	207	376	552	721	893	1064	1235	1405	1570	1983
	5	23	43	62	81	101	120	140	159	177	224
53,0	561	557	549	541	531	519	504	489	470	455	412
[15]	31	196	364	538	708	881	1052	1223	1391	1560	1974
	4	22	41	61	80	100	119	138	157	176	223
56,8	602	597	591	582	571	559	546	530	514	498	453
[20]		119	290	461	633	807	976	1145	1315	1485	1904
		13	33	52	72	91	110	129	149	168	215
75,7		799	792	785	775	762	748	734	717	702	660

S Motor 120 cm³/r [7.3 in³/r]

Δ Pressure Bar [PSI]

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2500]
	14	28	41	55	69	83	97	110	124	138	172
[2]	191	403	605	801	978	1146	1288	1440	1552	1679	
	22	46	68	91	110	129	146	163	175	190	
7,6	60	56	50	43	36	29	19	15	8	6	
[4]	188	403	617	829	1031	1236	1438	1632	1816	1990	1914
	21	46	70	94	117	140	162	184	205	225	216
15,1	122	118	112	106	98	87	78	67	56	49	16
[6]	172	391	607	821	1030	1241	1449	1654	1858	2056	2522
	19	44	69	93	116	140	164	187	210	232	285
22,7	186	180	175	167	159	149	137	126	114	103	73
[8]	156	375	593	807	1015	1229	1439	1648	1855	2059	2557
	18	42	67	91	115	139	163	186	210	233	289
30,3	249	244	237	229	220	210	199	185	174	162	128
[10]	130	349	567	785	995	1210	1420	1630	1838	2045	2559
	15	39	64	89	112	137	160	184	208	231	289
37,9	311	307	301	293	286	275	264	252	239	227	193
[12]	103	320	539	756	965	1175	1383	1593	1799	2003	2500
	12	36	61	85	109	133	156	180	203	226	282
45,4	374	369	363	355	346	336	327	314	303	288	253
[14]	70	285	502	715	923	1131	1335	1540	1745	1948	2452
	8	32	57	81	104	128	151	174	197	220	277
53,0	437	433	427	419	411	402	391	379	369	355	322
[15]	54	267	485	705	913	1122	1329	1540	1746	1947	2441
	6	30	55	80	103	127	150	174	197	220	276
56,8	469	465	459	452	444	433	423	411	400	386	349
[20]		159	377	600	815	1026	1232	1444	1651	1859	2383
		18	43	68	92	116	139	163	186	210	269
75,7		621	618	612	603	594	583	571	560	549	515


[267]
30 } Torque [lb-in]
465 } Nm
Speed RPM

S Series (103-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range printed in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production



S Motor 144 cm³/r [8.8 in³/r]

Δ Pressure Bar [PSI]

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[1900]	[2350]
	14	28	41	55	69	83	97	110	124	138	172
[2]	222	480	729	967	1190	1402	1591	1786	2031	2107	
7,6	25	54	82	109	134	158	180	202	229	238	
	49	45	40	34	29	21	17	13	14	14	
[4]	217	475	728	987	1237	1488	1727	1957	2181	2292	2310
15,1	24	54	82	112	140	168	195	221	246	259	261
	101	97	91	84	77	69	61	52	45	42	22
[6]	193	453	715	976	1234	1494	1746	1995	2239	2358	2867
22,7	22	51	81	110	139	169	197	225	253	266	324
	153	149	143	136	128	119	110	101	91	86	66
[8]	173	434	699	961	1218	1479	1735	1984	2235	2358	2894
30,3	20	49	79	109	138	167	196	224	252	266	327
	205	202	195	187	179	170	160	150	139	134	109
[10]	144	407	673	940	1197	1459	1715	1967	2218	2344	2890
37,9	16	46	76	106	135	165	194	222	251	265	327
	259	254	247	240	231	221	211	202	191	185	158
[12]	118	380	644	907	1167	1429	1685	1941	2194	2319	2878
45,4	13	43	73	102	132	161	190	219	248	262	325
	312	307	301	294	286	277	267	257	246	241	217
[14]	87	346	610	871	1131	1395	1651	1907	2163	2289	2851
53,0	10	39	69	98	128	158	187	215	244	259	322
	363	359	354	346	339	330	319	309	299	293	266
[15]	69	327	592	853	1113	1376	1633	1890	2146	2271	2835
56,8	8	37	67	96	126	156	185	214	242	257	320
	389	386	380	372	364	355	344	336	323	317	289
[20]		200	460	726	987	1251	1512	1770	2025	2153	2724
75,7		23	52	82	112	141	171	200	229	243	308
		516	513	507	499	491	480	470	459	454	427

S Motor 166 cm³/r [10.1 in³/r]

Δ Pressure Bar [PSI]

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[1900]	[2300]
	14	28	41	55	69	83	97	110	124	138	172
[2]	267	563	841	1105	1364	1622	1852	2081	2288		
7,6	30	64	95	125	154	183	209	235	259		
	43	39	35	30	27	21	16	13	13		
[4]	247	544	838	1129	1418	1707	1988	2255	2514	2641	3116
15,1	28	61	95	128	160	193	225	255	284	298	352
	89	85	80	74	68	60	53	47	41	38	28
[6]	217	517	813	1108	1401	1700	1994	2281	2559	2692	3214
22,7	25	58	92	125	158	192	225	258	289	304	363
	134	131	125	120	113	105	96	88	79	75	58
[8]	195	494	794	1089	1387	1687	1983	2269	2552	2691	3239
30,3	22	56	90	123	157	191	224	256	288	304	366
	180	176	171	164	156	147	138	128	118	114	96
[10]	176	477	776	1072	1371	1668	1960	2249	2537	2676	3228
37,9	20	54	88	121	155	188	221	254	287	302	365
	227	222	217	210	203	194	185	175	165	160	136
[12]	136	436	737	1037	1335	1636	1928	2217	2509	2651	3210
45,4	15	49	83	117	151	185	218	251	284	300	363
	272	269	264	258	249	241	233	223	214	208	186
[14]	93	394	696	995	1296	1599	1890	2185	2475	2617	3178
53,0	11	44	79	112	146	181	214	247	280	296	359
	318	315	310	303	296	287	279	269	259	254	230
[15]	73	371	672	973	1272	1575	1867	2159	2453	2596	3158
56,8	8	42	76	110	144	178	211	244	277	293	357
	341	338	333	326	319	309	300	290	280	274	253
[20]		227	527	829	1128	1430	1724	2020	2313	2457	3030
75,7		26	60	94	127	162	195	228	261	278	342
		452	449	443	435	426	417	407	396	390	366

[371]
42 } Torque [lb-in]
338 } Nm
Speed RPM

S Series (103-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range printed in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production

 Continuous
 Intermittent

S Motor 187 cm³/r [11.4 in³/r]

Δ Pressure Bar [PSI]

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[1850]	[2250]
	14	28	41	55	69	83	97	110	124	138	172
[2]	298	627	944	1244	1532	1805	2030	2250	2478		
	34	71	107	141	173	204	229	254	280		
7,6	37	34	31	25	22	18	10	9	7		
[4]	298	640	969	1291	1607	1919	2219	2511	2799	2869	3411
	34	72	109	146	182	217	251	284	316	324	385
15,1	78	75	70	65	60	53	47	41	35	33	19
[6]	279	621	953	1283	1608	1930	2243	2551	2850	2922	3502
	32	70	108	145	182	218	253	288	322	330	396
22,7	119	115	110	104	97	89	82	74	66	64	50
[8]	252	593	928	1257	1579	1905	2224	2542	2855	2932	3539
	28	67	105	142	178	215	251	287	323	331	400
30,3	160	156	151	144	137	129	120	110	101	99	78
[10]	211	555	888	1217	1546	1872	2193	2516	2831	2909	3518
	24	63	100	138	175	211	248	284	320	329	397
37,9	201	198	193	187	180	173	164	154	143	141	114
[12]	162	502	835	1164	1490	1818	2139	2463	2780	2857	3476
	18	57	94	131	168	205	242	278	314	323	393
45,4	243	240	235	229	222	214	206	196	184	181	154
[14]	118	452	786	1117	1443	1772	2095	2417	2736	2814	3438
	13	51	89	126	163	200	237	273	309	318	388
53,0	283	280	276	270	262	254	245	235	224	221	194
[15]	91	425	759	1089	1418	1747	2068	2389	2708	2786	3410
	10	48	86	123	160	197	234	270	306	315	385
56,8	304	301	296	290	283	274	265	256	243	240	214
[20]		259	590	925	1255	1585	1907	2229	2552	2633	3265
		29	67	105	142	179	216	252	288	297	369
75,7		403	400	394	387	379	370	359	347	344	319

S Motor 225 cm³/r [13.7 in³/r]

Δ Pressure Bar [PSI]

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1700]	[2050]
	14	28	41	55	69	83	97	110	124	138
[2]	358	765	1139	1498	1842	2163	2474	2738	2894	
	40	86	129	169	208	244	280	309	327	
7,6	32	29	27	23	20	16	12	10	8	
[4]	367	774	1177	1577	1956	2325	2680	3022	3191	3753
	41	87	133	178	221	263	303	341	361	424
15,1	66	63	60	55	50	46	40	34	31	23
[6]	348	758	1161	1567	1960	2344	2716	3083	3264	3863
	39	86	131	177	221	265	307	348	369	437
22,7	99	96	92	88	82	76	70	63	59	45
[8]	313	721	1124	1529	1921	2312	2696	3073	3265	3894
	35	81	127	173	217	261	305	347	369	440
30,3	133	132	127	123	117	111	104	96	92	76
[10]	262	669	1069	1473	1859	2247	2627	2997	3184	3810
	30	76	121	166	210	254	297	339	360	430
37,9	167	165	161	157	152	146	139	130	126	107
[12]	203	609	1006	1400	1782	2160	2531	2912	3098	3721
	23	69	114	158	201	244	286	329	350	420
45,4	202	199	196	191	186	180	173	165	160	141
[14]	143	544	938	1324	1700	2079	2452	2824	3008	3639
	16	62	106	150	192	235	277	319	340	411
53,0	236	233	230	225	219	214	207	199	194	177
[15]	106	504	897	1281	1653	2027	2393	2761	2944	3576
	12	57	101	145	187	229	270	312	333	404
56,8	253	251	248	243	237	231	224	215	211	192
[20]		303	697	1091	1477	1854	2214	2581	2765	3399
		34	79	123	167	210	250	292	312	384
75,7		336	334	330	325	318	312	304	298	282


[504]
57
251 } Torque [lb-in]
Nm
Speed RPM

S Series (103-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range printed in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production



S Motor 298 cm³/r [18.2 in³/r]

Δ Pressure Bar [PSI]

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1500]	[1800]
	14	28	41	55	69	83	97	110	124
[2]	487	1009	1509	1991	2460	2931	3360	3577	4113
	55	114	170	225	278	331	380	404	465
7,6	24	22	20	18	17	14	11	10	8
[4]	498	1043	1576	2093	2597	3087	3567	3798	4500
	56	118	178	236	293	349	403	429	508
15,1	49	47	45	41	38	34	31	29	25
[6]	470	1017	1552	2080	2594	3097	3594	3835	4536
	53	115	175	235	293	350	406	433	513
22,7	74	72	69	66	62	57	52	49	42
[8]	423	967	1502	2031	2549	3062	3563	3807	4526
	48	109	170	229	288	346	403	430	511
30,3	100	98	95	92	88	83	77	73	64
[10]	357	901	1433	1961	2477	2989	3486	3730	4456
	40	102	162	222	280	338	394	421	504
37,9	126	124	121	118	113	108	101	97	87
[12]	287	826	1357	1884	2402	2917	3410	3652	4363
	32	93	153	213	271	330	385	413	493
45,4	152	150	147	144	140	134	126	121	109
[14]	199	733	1261	1786	2303	2818	3316	3561	4276
	22	83	142	202	260	318	375	402	483
53,0	177	176	173	170	165	160	152	147	134
[15]	154	688	1218	1742	2258	2771	3273	3518	4241
	17	78	138	197	255	313	370	398	479
56,8	190	189	186	183	178	173	165	160	146
[20]		418	945	1471	1986	2502	3004	3253	3997
		47	107	166	224	283	339	368	452
75,7		253	251	248	244	239	231	226	212

S Motor 372 cm³/r [22.7 in³/r]

Δ Pressure Bar [PSI]

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1500]
	14	28	41	55	69	83	97	110
[2]	629	1287	1905	2501	3066	3624	3886	4370
	71	145	215	283	346	409	439	494
7,6	19	18	16	14	13	11	9	7
[4]	628	1304	1962	2600	3206	3799	4082	4642
	71	147	222	294	362	429	461	525
15,1	40	38	36	34	30	27	25	23
[6]	587	1261	1926	2578	3203	3813	4112	4687
	66	142	218	291	362	431	465	530
22,7	60	59	56	54	50	45	43	38
[8]	529	1201	1867	2518	3148	3769	4072	4657
	60	136	211	285	356	426	460	526
30,3	81	79	77	75	71	66	64	58
[10]	451	1124	1779	2429	3056	3678	3983	4583
	51	127	201	274	345	416	450	518
37,9	102	100	98	96	92	86	84	78
[12]	359	1030	1688	2333	2963	3587	3889	4482
	41	116	191	264	335	405	439	506
45,4	122	121	119	117	113	107	104	98
[14]	256	922	1577	2226	2864	3487	3787	4381
	29	104	178	252	324	394	428	495
53,0	143	142	140	137	134	128	126	119
[15]	199	862	1514	2167	2797	3424	3727	4322
	22	97	171	245	316	387	421	488
56,8	153	152	150	148	144	138	135	129
[20]		534	1187	1832	2470	3093	3402	4004
		60	134	207	279	349	384	452
75,7		204	202	200	197	192	189	183

[862]
97
152 } Torque [lb-in]
Nm
Speed RPM

S Series (103-)

Dimensions

(Refer to pages B-4-19 thru B-4-22 for shaft and port dimensions.)

Ports

7/8-14 SAE O-Ring


6-1/2 (BSP) Straight thread manifold

Standard Rotation Viewed from Shaft End


Port A Pressurized — CW

Port B Pressurized — CCW

2 Bolt Flange

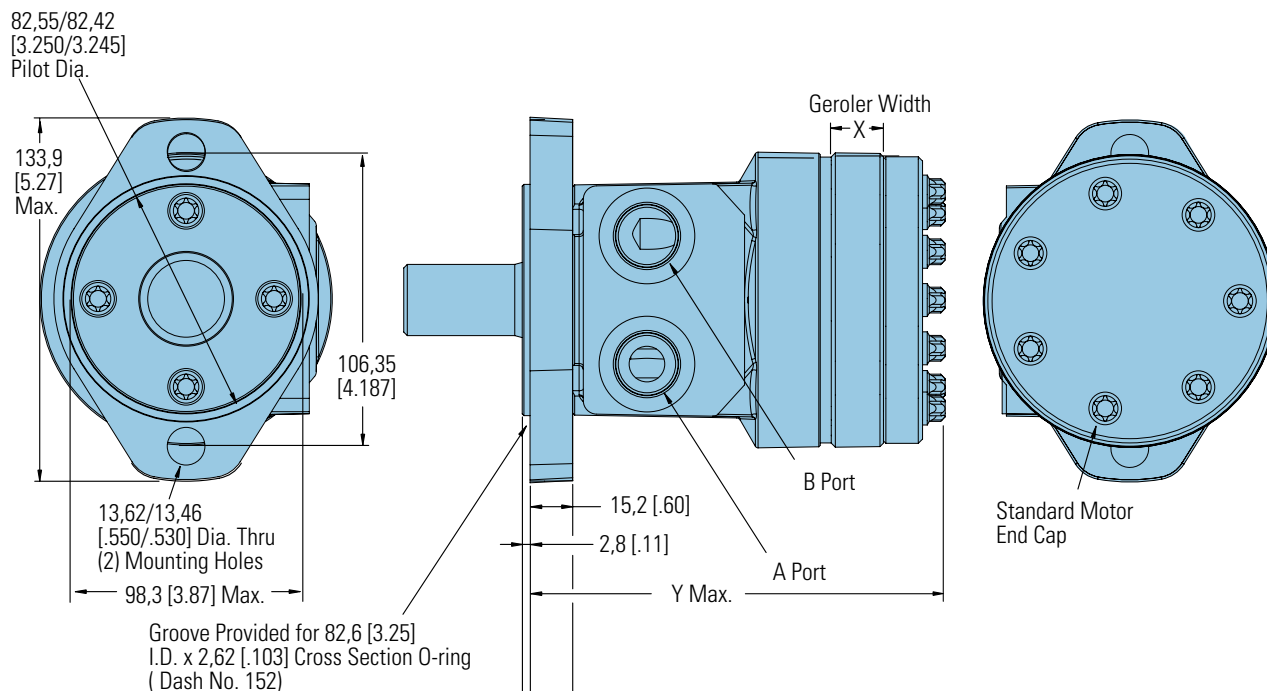

4 Bolt Flange

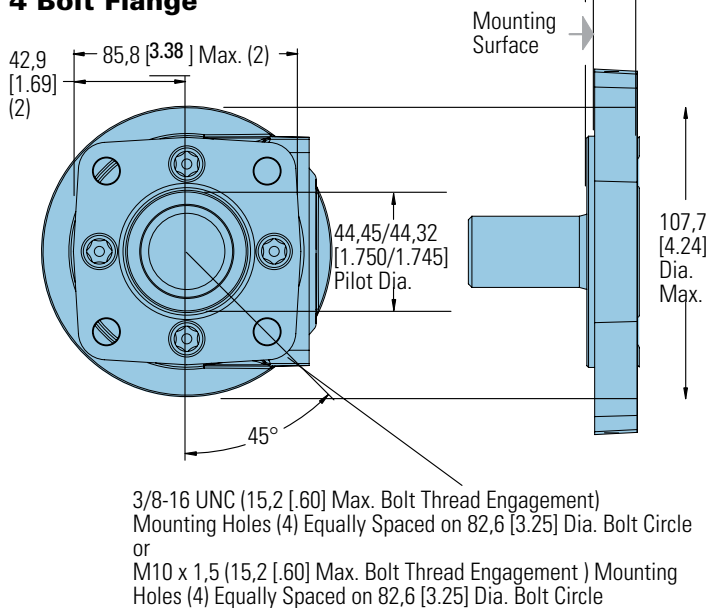

Displacement cm ³ /r [in ³ /r]	X mm [inch]	Y mm [inch]
58 [3.6]	7,5 [.30]	138,0 [5.43]
76 [4.6]	9,8 [.39]	140,3 [5.52]
93 [5.7]	12,0 [.47]	142,5 [5.61]
120 [7.3]	15,5 [.61]	146,0 [5.75]
144 [8.8]	18,6 [.73]	149,1 [5.87]
165 [10.1]	21,3 [.84]	151,8 [5.98]
186 [11.4]	24,0 [.94]	154,5 [6.08]
225 [13.7]	28,9 [1.14]	159,4 [6.28]
299 [18.2]	38,5 [1.52]	169,0 [6.66]
371 [22.7]	47,9 [1.88]	178,4 [7.02]

S Series (103-)

Product Numbers

Use three-digit prefix (103-) plus four-digit number from charts for complete product number (ex: 103-1093). Orders will not be accepted without the three-digit prefix.

B-3

2 Bolt Flange

SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER									
		59 [3.6]	75 [4.6]	93 [5.7]	120 [7.3]	144 [8.8]	166 [10.1]	187 [11.4]	225 [13.7]	298 [18.2]	372 [22.7]
1 in. Straight w/Woodruff Key	7/8-14 O-Ring	103-1537	-1034	-1035	-1538	-1539	-1036	-1037	-1038	-1039	-1040
	1/2 NPTF	103-1540	-1026	-1027	-1541	-1542	-1028	-1029	-1030	-1031	-1032
	Manifold	103-1543	-1042	-1043	-1544	-1545	-1044	-1045	-1046	-1047	-1048
1 in. SAE 6B Splined	7/8-14 O-Ring	103-1552	-1082	-1083	-1553	-1554	-1084	-1085	-1086	-1087	-1088
	1/2 NPTF	103-1555	-1074	-1075	-1556	-1557	-1076	-1077	-1078	-1079	-1080
	Manifold	103-1558	-1090	-1091	-1559	-1560	-1092	-1093	-1094	-1095	-1096

103-1093

4 Bolt Flange

SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER									
		59 [3.6]	75 [4.6]	93 [5.7]	120 [7.3]	144 [8.8]	166 [10.1]	187 [11.4]	225 [13.7]	298 [18.2]	372 [22.7]
1 in. Straight w/Woodruff Key	7/8-14 O-Ring	103-1570	-1010	-1011	-1571	-1572	-1012	-1013	-1014	-1015	-1016
	1/2 NPTF	103-1573	-1002	-1003	-1574	-1575	-1004	-1005	-1006	-1007	-1008
	Manifold	103-1576	-1018	-1019	-1577	-1578	-1020	-1021	-1022	-1023	-1024
1 in. SAE 6BSplined	7/8-14 O-Ring	103-1579	-1058	-1059	-1580	-1581	-1060	-1061	-1062	-1063	-1064
	1/2 NPTF	103-1582	-1050	-1051	-1583	-1584	-1052	-1053	-1054	-1055	-1056
	Manifold	103-1585	-1066	-1067	-1586	-1587	-1068	-1069	-1070	-1071	-1072

103-1069

S Series Motors with Corrosion Protection

SHAFT	MOUNTING	PORT SIZE	DISPL. cm³/r [in³/r] / PRODUCT NUMBER									
			59 [3.6]	75 [4.6]	93 [5.7]	120 [7.3]	144 [8.8]	166 [10.1]	187 [11.4]	225 [13.7]	298 [18.2]	372 [22.7]
1 in. Straight w/ Woodruff Key	2 Bolt Flange	7/8-14 O-Ring	103-1645	—	—	—	—	—	—	-1649	—	-1650
	4 Bolt Flange	1/2 NPTF	—	—	—	—	—	—	—	-1620	—	-1621

*Manifold product numbers shown are for motors with four 5/16 z-18 port face mounting threads. Manifold, manifold mounting O-Rings and bolts are NOT included.

For S Series Motors with a configuration Not Shown in the charts above: Use the model code number system on page B-3-11 to specify the product in detail.

S Series with Low Speed Valving

Product Number

Motors with the low speed valving option enable very smooth low speed operation while maintaining high torque.

Designed to run continuously at up to 200 RPM at standard rated pressures and reduced flows, this option provides smooth operation at low speeds. Furthermore, they resist slippage and have

more momentary load holding ability than the standard H and S Series motors. Motors with this valving are not intended for low pressure applications (A minimum of 300 psi delta must be maintained between A port pressure and case pressure). Shaft side / radial load ratings are not affected by this valving.

Use digit prefix—103—plus four digit number from charts for complete product number—Example: 103-2678.

Orders will not be accepted without the three-digit prefix.

2 Bolt Flange

SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER									
		59 [3.6]	75 [4.6]	93 [5.7]	120 [7.3]	144 [8.8]	166 [10.1]	187 [11.4]	225 [13.7]	298 [18.2]	372 [22.7]
1 in. Straight w/Woodruff Key	7/8 -14 O-Ring	103- —	-1427	-1428	—	—	-1429	-1430	-1431	-1432	-1433
	1/2 NPTF	103- —	-1419	-1420	—	—	-1421	-1422	-1423	-1424	-1425
	Manifold*	103- —	—	—	—	—	—	—	—	—	—
1 in. SAE 6B Splined	7/8 -14 O-Ring	103- —	-1525	—	—	-2692	—	—	-1675	—	—
	1/2 NPTF	103- —	—	-1634	—	—	—	—	—	—	—
	Manifold*	103- —	-1522	-2678	—	—	—	—	—	—	-1527

4 Bolt Flange

SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER									
		59 [3.6]	75 [4.6]	93 [5.7]	120 [7.3]	144 [8.8]	166 [10.1]	187 [11.4]	225 [13.7]	298 [18.2]	372 [22.7]
1 in. Straight w/Woodruff Key	7/8 -14 O-Ring	103-1625 -1410 -1411 -1626 -2531 -1412 -1413 -1414 -1415 -1416									
	1/2 NPTF	103-1644	-1402	-1403	—	—	-1404	-1405	-1406	-1407	-1408

103-1404

103-1527

*Manifold product numbers shown are for motors with four 5/16 -18 port face mounting threads. Manifold, manifold mounting O-Rings and bolts are NOT included.

For S Series Motors with Low Speed Valving Not Shown in the chart above: Use the model code number system on page B-3-11 to specify the product in detail.

S Series (103-)

Model Code

The following 25-digit coding system has been developed to identify all of the configuration options for the S motor. Use this model code to specify a motor with the desired features. All 25-digits of the code must be present when ordering. You may want to photocopy the matrix below to ensure that each number is entered in the correct box.

1	2	3	4	5	6	7	8		10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25

1 Product M – Motor

2, 3 Series S0 – S Series Motor

4, 5, 6 Displacement cm³/r [in³/r]

036 – 58 [3.6]
046 – 76 [4.6]
057 – 93 [5.7]
073 – 120 [7.3]
088 – 144 [8.8]
101 – 165 [10.1]
114 – 186 [11.4]
137 – 224 [13.7]
182 – 299 [18.2]
227 – 371 [22.7]

7, 8 Mounting Type AA – 2 Bolt Std: 82.50 [3.248] Dia. x 3.05 [.120] Pilot, 13.59 [.535] Dia. Mounting Holes on 106.35 [4.187] Dia. B.C.

BA – 4 Bolt Std: 44.40
[1.748] Dia. x 3.05 [.120]
Pilot, .375-16 UNC-2B
Mounting Holes on 82.55
[3.250] Dia. B.C.

CA – 2 Bolt Std: 82.50
[3.248] Dia. x 6.10 [.240]
Pilot, 10.41 [.410] Dia.
Mounting Holes on 106.35
[4.187] Dia. B.C. (SAE A)

DD – 2 Bolt Std: 101.60
[4.000] Dia. x 6.10 [.240]
Pilot, 14.35 [.565] Dia.
Mounting Holes on 146.05
[5.750] Dia. B.C. (SAE B)
(Ductile)

EA – 4 Bolt Magneto: 82.50
[3.248] Dia. x 3.05 [.120]
Pilot, 13.59 [.535] Dia.
Mounting Holes on 106.35
[4.187] Dia. B.C.

FA – 4 Bolt Std: 44.40
[1.748] Dia. x 3.05 [.120]

Pilot, M10 x 1.5-6h Mounting Holes on 82.55 [3.250] Dia. B.C.

LA – 2 Bolt Std: 44.45
[1.750] Dia. x 3.05 [.120]
Pilot, 13.59 [.535] Dia.
Mounting Holes on 106.35
[4.187] Dia. B.C.

MA – 2 Bolt (Standard)
82.50 [3.248] Dia. x 8.13
[.320] Pilot, 13.59 [.535] Dia.
Mounting Holes on 106.35
[4.187] Dia. B.C., w/o O-ring
Groove

9, 10 Output Shaft

01 – 25.4 [1.00] Dia.
Straight, Woodruff Key,
.250-20 UNC-2B Hole in
Shaft End

02 – 25.4 [1.00] Dia. SAE
6B Spline, .250-20 UNC-2B
Hole in Shaft End

07 – 25.4 [1.00] Dia. Straight,
8.03 [.316] Dia. Crosshole
11.2 [.44] From End, 5.6 [.22]
Extra Length

08 – 25.4 [1.00] Dia.
Straight, 10.31 [.406] Dia.
Crosshole 15.7 [.62] From
End, .250-20 UNC-2B Hole
in Shaft End

16 – 22.22 [.875] Dia. SAE
13 Tooth Spline (SAE B)

17 – 22.22 [.875] Dia.
Straight, 6.4 [.25] x 19.0
[.75] Square Key (SAE B)

18 – 25.4 [1.00] Dia. Tapered,
Woodruff Key and Nut,
34.92 [1.375] Taper Length

24 – 25.00 [.984] Dia.
Straight, 8.00 [.315] Key,
M8 x 1.25-6H Hole in Shaft
End

39 - 25.00 [.984] Dia.
Straight (k6), 8.00 [.315]
Key, M8 x 1.25-6H Hole in
Shaft End

11, 12 Port Type

AA – .875-14 UNF-2B SAE
O-Ring Ports

AB – .500-14 NPTF Dryseal
Pipe Thread Ports

AC – Manifold Ports
(.3125-18 UNC-2B
Mounting Holes)

AD – Manifold Ports (M8 x
1.25-6H Mounting Holes)

AF – G 1/2 BSP Straight
Thread Ports

13 Case Flow Options ††

0 – None Specified

1 – 4375-20 UNF-2B SAE
O-Ring Port (End Cap)

2 – G 1/4 BSP Straight
THD Port (End Cap)

3 – Manifold Case Drain

†† – Internal check valves
are standard features.

14 Geroler Options

0 – None Specified

15 Shaft Options

0 – None Specified

N – Electroless Nickel Plated

16, 17 Seal Options

00 – Standard Seals

02 – Seal Guard

03 – Viton Seals

04 – Viton Shaft Seal

05 – Vented Two-Stage Seal

07 – High Pressure Shaft
Seal

18 Speed Sensor Options

0 – None

A – Speed Sensor Options
12mm Digital Speed Pickup
(15 pulse) without lead wire

B – Magnetic Speed Pickup
(60 Pulse by Quadrature),

No lead wire with M12
connector

(A=Power, B=Common,
C=Signal)

19 Manifold Block Options 0 – None

* Contact your Eaton
sales representative for
available options.

20, 21 Special Features (Hardware)

00 – None Specified

AB – Low Speed Valving

SS – Stainless Steel Flange
Bolts

22 Special Assembly Instructions

0 – None

1 – Reverse Rotation

2 – Flange Rotated 90°

3 – Reverse Rotation, Flange
Rotated 90°

23 Paint/Packaging Options

0 – No Paint

A – Low Gloss Black
Primer

D – Environmental Coated
Gloss White

F – Environmental Coated
Black

24 Eaton Assigned Code When Applicable

0 – Assigned Code

25 Eaton Assigned Design Code


M – Twelve (12)

Feature in **bold** are preferred and
allow for shorter lead time.

B-3

T Series (158-)

Highlights

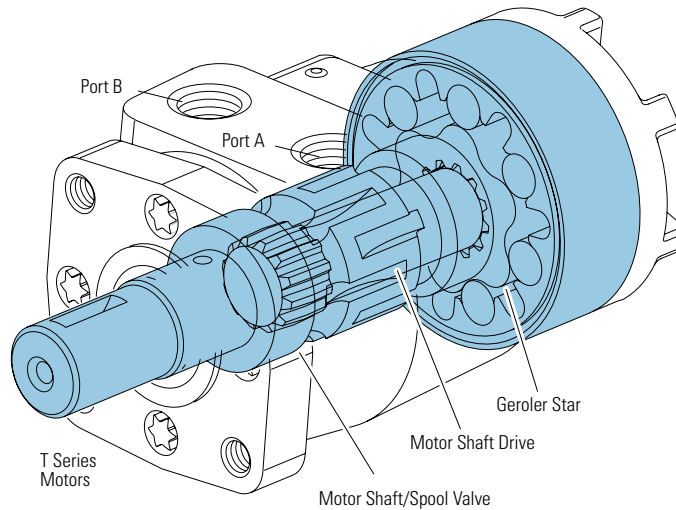

Description

The newest Geroler motor, the "T Series, features the latest innovations in Geroler technology. These innovations include optimized Geroler geometry with lower drive running angle for improved life and improved low speed performance. In addition, the improved housing and smaller diameter end cap results in increased envelope rigidity which improves efficiency under high pressure loads. All of these innovations come together to make the T Series motor the highest performing motor in its class.

Specifications for T Series Motors

Geroler Element	11 Displacements
Flow l/min [GPM]	55 [15] Continuous***
	75 [20] Intermittent**
Speed	Up to 1021 RPM
Pressure bar [PSI]	155 [2250] Cont.***
	190 [2750] Inter.**
Torque Nm [lb-in]	441 [3905] Cont.***
	486 [4300] Inter.**

*** Continuous—(Cont.) Continuous rating, motor may be run continuously at these ratings.

** Intermittent—(Inter.) Intermittent operation, 10% of every minute.

Features:

- Constant clearance Geroler, geometry
- Optimized drive system with reduced running angle
- Three-pressure zone design (ability to reduce case pressure)
- Variety of displacements, shafts and mounts
- Special options to meet customer needs

Benefits:

- High efficiency
- Smooth low-speed operation
- Extended motor life (especially at low speed conditions)
- Design flexibility
- Ability to optimize designs for your application needs
- Extends leak-free performance

Applications:

- Agricultural augers, harvesters, seeders
- Car wash brushes
- Food processing
- Railroad maintenance equipment
- Machine tools
- Conveyors
- Industrial sweepers and floor polishers
- Saw mill works
- Turf equipment
- Concrete and asphalt equipment
- Skid steer attachments
- Many more

B-4



Crane (winch)



Paving




Harvester



Crane and winches

T Series (158-)

Specifications

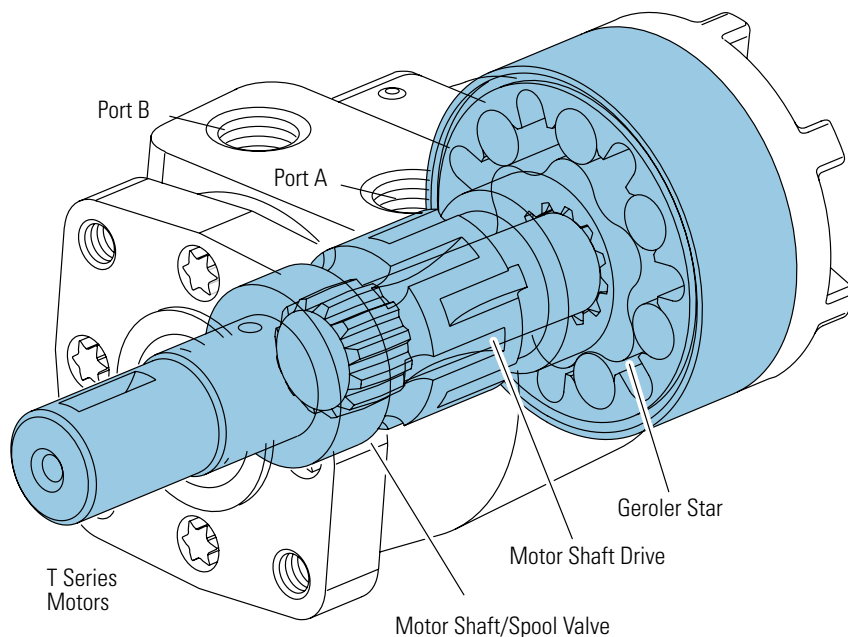

SPECIFICATION DATA – T MOTORS

Displ. cm ³ /r [in ³ /r]		36 [2.2]	49 [3.0]	66 [4.0]	80 [4.9]	102 [6.2]	131 [8.0]	157 [9.6]	195 [11.9]	244 [14.9]	306 [18.7]	370 [22.6]
Max. Speed (RPM) @ Continuous Flow		1021	906	849	694	550	426	355	287	229	183	152
Flow LPM [GPM]	Continuous	38 [10]	45 [12]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]
	Intermittent	38 [10]	57 [15]	68 [18]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]
Torque Nm [lb-in]	Continuous	76 [672]	105 [928]	138 [1222]	174 [1541]	219 [1936]	251 [2226]	297 [2628]	359 [3178]	410 [3633]	441 [3905]	430 [3811]
	Intermittent **	93 [824]	118 [1131]	168 [1488]	212 [1872]	264 [2339]	307 [2718]	359 [3178]	437 [3864]	485 [4290]	483 [4275]	486 [4300]
Pressure Δ Bar	Continuous*	155 [2250]	155 [2250]	155 [2250]	155 [2250]	155 [2250]	138 [2000]	138 [2000]	138 [2000]	127 [1850]	110 [1600]	90 [1300]
Δ PSI]	Intermittent**	190 [2750]	190 [2750]	190 [2750]	190 [2750]	190 [2750]	172 [2500]	172 [2500]	172 [2500]	155 [2250]	124 [1800]	103 [1500]

A simultaneous maximum torque and maximum speed NOT recommended.

Note:

To assure best motor life, run motor for approximately one hour at 30% of rated pressure before application to full load. Be sure motor is filled with fluid prior to any load applications.

Maximum Inlet Pressure:

190 Bar [2750 PSI] without regard to Δ Bar [Δ PSI] and/or back pressure ratings or combination thereof.

6B splined or Tapered shafts are recommended whenever operation above 282 NM [2500 lb-in] of torque, especially for those applications subject to frequent reversals.

Δ Pressure:

The true Δ bar [Δ PSI] between inlet port and outlet port

Continuous Rating:

Motor may be run continuously at these ratings

Intermittent Operation:

10% of every minute

Recommended Fluids:

Premium quality, anti-wear type hydraulic oil with a viscosity of not less than 70 SUS at operating temperature.

Recommended System Operating Temp.:

-34°C to 82°C [-30°F to 180°F]

Recommended Filtration:

per ISO Cleanliness Code 4406, level 20/18/13


T Series

(158-, 185-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed. For best motor life select a motor to run with a torque and speed range shown in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production.



		36 cm³/r [2.2 in³/r]												Max. Continuous	Max. Intermittent
		Δ Pressure Bar [PSI]													
		Continuous													
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2250]		
		14	28	41	55	69	83	97	110	124	138	152	155		
Flow LPM [GPM]	[2]	[50]	[110]	[172]	[233]	[291]	[348]	[401]	[455]	[501]	[546]	[590]	[596]	[635]	
	7,6	6 209	12 203	19 197	26 191	33 189	39 181	45 167	51 164	57 153	62 139	67 122	67 116	72 64	
	[4]	[50]	[109]	[172]	[233]	[296]	[355]	[414]	[475]	[534]	[584]	[646]	[659]	[786]	
	15,1	6 415	12 411	19 398	26 388	33 384	40 381	47 368	54 357	60 354	66 323	73 304	74 302	89 283	
	[6]	[43]	[108]	[171]	[233]	[298]	[361]	[420]	[479]	[538]	[595]	[657]	[672]	[824]	
	22,7	5 617	12 613	19 602	26 595	34 585	41 570	47 563	54 558	61 534	67 520	74 504	76 496	93 425	
Max. Continuous	[8]	[39]	[101]	[164]	[226]	[292]	[354]	[415]	[475]	[538]	[592]	[656]	[670]	[819]	
	30,3	4 821	11 815	19 803	26 797	33 784	40 774	47 758	54 747	61 732	67 707	74 688	76 680	92 607	
Max. Intermittent	[10]	[30]	[93]	[155]	[214]	[278]	[342]	[406]	[473]	[532]	[590]	[650]	[668]	[805]	
	37,9	3 1021	11 1014	18 1002	24 999	31 981	39 965	46 953	53 937	60 921	67 903	73 880	75 873	91 799	

[93]
11
1014

Torque [lb-in]
Nm
Speed RPM

		49 cm³/r [3.0 in³/r]												Max. Continuous	Max. Intermittent
		Δ Pressure Bar [PSI]													
		Continuous													
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2250]		
		14	28	41	55	69	83	97	110	124	138	152	155		
Flow LPM [GPM]	[2]	[73]	[161]	[245]	[327]	[408]	[486]	[563]	[641]	[710]	[786]	[849]	[866]	[1023]	
	7,6	8 152	18 152	28 148	37 147	46 142	55 141	64 134	72 124	80 115	89 109	96 95	98 92	116 58	
	[4]	[72]	[160]	[246]	[329]	[416]	[500]	[584]	[668]	[746]	[825]	[901]	[922]	[1123]	
	15,1	8 303	18 298	28 294	37 290	47 276	56 273	66 265	75 261	84 245	93 243	102 235	104 228	127 152	
	[6]	[58]	[148]	[234]	[326]	[413]	[500]	[583]	[663]	[746]	[827]	[909]	[928]	[1131]	
	22,7	7 461	17 450	26 445	37 438	47 434	56 421	66 419	75 410	84 407	93 389	103 376	105 373	128 344	
Max. Continuous	[8]	[44]	[127]	[216]	[306]	[392]	[480]	[566]	[652]	[734]	[815]	[897]	[917]	[1125]	
	30,3	5 607	14 603	24 600	35 590	44 583	54 576	64 564	74 554	83 545	92 536	101 522	104 520	127 503	
Max. Intermittent	[10]	[39]	[128]	[213]	[302]	[391]	[477]	[562]	[647]	[731]	[815]	[897]	[917]	[1121]	
	37,9	4 755	14 750	24 745	34 738	44 732	54 719	63 713	73 702	83 696	92 682	101 663	104 661	127 638	
Max. Intermittent	[12]	[33]	[119]	[203]	[291]	[378]	[464]	[551]	[635]	[719]	[802]	[883]	[900]	[1061]	
	45,4	4 906	13 902	23 895	33 883	43 875	52 862	62 859	72 844	81 835	91 819	100 806	102 804	120 788	
Max. Intermittent	[15]	[26]	[86]	[172]	[256]	[342]	[430]	[505]	[591]	[674]	[745]	[830]	[851]		
	56,8	3 1132	10 1124	19 1113	29 1115	39 1106	49 1106	57 1098	67 1093	76 1079	84 1070	94 1058	96 1056		


T Series

(158-, 185-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed. For best motor life select a motor to run with a torque and speed range shown in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production.



		66 cm ³ /r [4.0 in ³ /r]												Max. Continuous	Max. Intermittent
		Δ Pressure Bar [PSI]													
		Continuous													
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2250]		
		14	28	41	55	69	83	97	110	124	138	152	155		190
Flow LPM [GPM]	[2]	[78]	[191]	[303]	[414]	[522]	[625]	[706]	[804]	[898]	[991]	[1081]	[1103]	[1318]	
	7,6	9	22	34	47	59	71	80	91	101	112	122	125	149	
		114	111	110	107	105	101	96	92	87	81	73	72	48	
	[4]	[97]	[209]	[325]	[441]	[548]	[657]	[766]	[873]	[972]	[1077]	[1181]	[1205]	[1437]	
	15,1	11	24	37	50	62	74	87	99	110	122	133	136	162	
		229	229	217	216	212	205	194	190	186	183	181	178	170	
	[6]	[79]	[192]	[309]	[426]	[534]	[649]	[760]	[874]	[984]	[1090]	[1190]	[1218]	[1488]	
	22,7	9	22	35	48	60	73	86	99	111	123	134	138	168	
		344	343	335	334	321	320	319	315	291	288	279	276	270	
	[8]	[75]	[191]	[304]	[419]	[532]	[645]	[759]	[871]	[982]	[1092]	[1197]	[1222]	[1458]	
	30,3	8	22	34	47	60	73	86	98	111	123	135	138	165	
		456	451	447	442	431	426	419	415	412	401	391	386	339	
	[10]	[49]	[163]	[283]	[398]	[509]	[623]	[742]	[856]	[971]	[1080]	[1186]	[1209]	[1425]	
	37,9	6	18	32	45	58	70	84	97	110	122	134	137	161	
		569	565	560	552	547	541	532	525	512	504	498	496	475	
	[12]	[24]	[156]	[270]	[385]	[502]	[614]	[729]	[845]	[963]	[1067]	[1182]	[1209]	[1472]	
	45,4	3	18	31	43	57	69	82	95	109	121	134	137	166	
		681	678	671	665	658	651	641	635	623	612	604	601	571	
	[14]	[19]	[143]	[261]	[370]	[485]	[602]	[718]	[837]	[948]	[1064]	[1175]	[1199]	[1436]	
	53,0	2	16	29	42	55	68	81	95	107	120	133	135	162	
		793	788	787	778	771	762	753	746	737	723	715	711	677	
	[15]	[13]	[120]	[236]	[352]	[471]	[590]	[707]	[823]	[939]	[1052]	[1165]	[1192]	[1462]	
	56,8	1	14	27	40	53	67	80	93	106	119	132	135	165	
		849	844	839	832	826	819	806	800	786	779	770	766	725	
Max. Continuous															
Max. Intermittent	[18]		[107]	[215]	[326]	[442]	[555]	[669]	[786]	[900]	[1016]	[1123]	[1152]		
	68,1		12	24	37	50	63	76	89	102	115	127	130		
			1006	1003	998	988	976	975	965	952	940	924	919		

		80 cm ³ /r [4.9 in ³ /r]												Max. Continuous	Max. Intermittent
		Δ Pressure Bar [PSI]													
		Continuous													
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2250]		190
		14	28	41	55	69	83	97	110	124	138	152	155		
Flow LPM [GPM]	[2]	[123]	[265]	[405]	[544]	[680]	[804]	[934]	[1052]	[1181]	[1079]	[937]	[895]		
	7,6	14	30	46	61	77	91	106	119	133	122	106	101		
		93	90	86	83	80	75	70	63	57	43	24	20		
	[4]	[120]	[264]	[406]	[551]	[689]	[828]	[965]	[1101]	[1237]	[1369]	[1505]	[1537]	[1857]	
	15,1	14	30	46	62	78	94	109	124	140	155	170	174	210	
		187	185	183	179	175	171	166	162	156	150	142	140	121	
	[6]	[113]	[255]	[398]	[542]	[682]	[823]	[963]	[1101]	[1239]	[1373]	[1508]	[1541]	[1868]	
	22,7	13	29	45	61	77	93	109	124	140	155	170	174	211	
		279	275	271	267	265	258	253	248	240	232	223	221	198	
	[8]	[99]	[243]	[386]	[528]	[669]	[812]	[954]	[1094]	[1233]	[1368]	[1503]	[1537]	[1872]	
	30,3	11	27	44	60	76	92	108	124	139	155	170	174	212	
		372	367	364	359	354	351	343	338	333	324	315	313	289	
	[10]	[84]	[228]	[371]	[514]	[655]	[798]	[941]	[1080]	[1219]	[1357]	[1496]	[1530]	[1870]	
	37,9	9	26	42	58	74	90	106	122	138	153	169	173	211	
		463	460	456	450	446	441	435	428	420	412	403	399	368	
	[12]	[63]	[209]	[354]	[498]	[638]	[782]	[926]	[1067]	[1208]	[1346]	[1484]	[1520]	[1864]	
	45,4	7	24	40	56	72	88	105	121	136	152	168	172	211	
		557	552	547	543	537	530	523	515	509	500	489	487	470	
	[14]	[55]	[185]	[331]	[476]	[620]	[762]	[904]	[1046]	[1188]	[1327]	[1467]	[1502]	[1842]	
	53,0	6	21	37	54	70	86	102	118	134	150	166	170	208	
		649	646	642	635	630	622	616	609	599	592	581	578	550	
	[15]	[51]	[176]	[316]	[463]	[609]	[748]	[891]	[1037]	[1177]	[1316]	[1457]	[1491]	[1844]	
	56,8	6	20	36	52	69	85	101	117	133	149	165	168	208	
		694	691	687	680	673	668	660	650	642	634	622	619	598	
Max. Continuous															
Max. Intermittent	[20]		[160]	[305]	[455]	[578]	[737]	[857]	[968]	[1144]	[1277]	[1412]	[1446]		
	75,7		18	34	51	65	83	97	109	129	144	160	163		
			916	910	893	893	875	866	877	843	833	839	836		

[176] } Torque [lb-in]
20 } Nm
691 } Speed RPM

T Series

(158-, 185-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed. For best motor life select a motor to run with a torque and speed range shown in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production.

	Continuous
	Intermittent

		102 cm³/r [6.2 in³/r]											Max. Contin-uous	Max. Inter-mittent
		Δ Pressure Bar [PSI]												
		Continuous												
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2250]	[2750]
		14	28	41	55	69	83	97	110	124	138	152	155	190
Flow LPM [GPM]	[2]	[161]	[341]	[519]	[697]	[871]	[1030]	[1193]	[1349]	[1511]	[1496]	[1441]	[1421]	
	7,6	18 73	39 71	59 68	79 66	98 63	116 60	135 56	152 51	171 46	169 36	163 23	161 20	
	[4]	[157]	[340]	[520]	[702]	[879]	[1056]	[1229]	[1401]	[1567]	[1727]	[1889]	[1925]	[2271]
	15,1	18 149	38 146	59 144	79 141	99 138	119 135	139 131	158 128	177 124	195 118	213 111	217 109	257 92
	[6]	[147]	[329]	[510]	[692]	[871]	[1050]	[1227]	[1401]	[1571]	[1731]	[1895]	[1936]	[2339]
	22,7	17 221	37 217	58 214	78 211	98 208	119 204	139 199	158 195	178 190	196 184	214 176	219 174	264 154
	[8]	[132]	[315]	[497]	[675]	[857]	[1038]	[1216]	[1392]	[1564]	[1725]	[1891]	[1932]	[2326]
	30,3	15 294	36 290	56 287	76 284	97 280	117 277	137 271	157 267	177 262	195 255	214 247	218 245	263 220
	[10]	[109]	[293]	[477]	[657]	[839]	[1018]	[1198]	[1374]	[1542]	[1711]	[1878]	[1918]	[2326]
	37,9	12 367	33 363	54 360	74 355	95 351	115 347	135 343	155 337	174 332	193 325	212 318	217 315	263 287
Max. Contin-uous	[12]	[84]	[271]	[457]	[638]	[818]	[999]	[1179]	[1354]	[1527]	[1697]	[1858]	[1901]	[2323]
	45,4	9 440	31 436	52 432	72 429	92 424	113 419	133 414	153 409	173 402	192 395	210 386	215 384	262 364
Max. Inter-mittent	[14]	[59]	[242]	[428]	[611]	[794]	[974]	[1151]	[1328]	[1502]	[1674]	[1841]	[1883]	[2301]
	53,0	7 513	27 510	48 506	69 501	90 497	110 492	130 487	150 482	170 475	189 469	208 458	213 456	260 428
Max. Contin-uous	[15]	[39]	[227]	[411]	[595]	[780]	[957]	[1136]	[1314]	[1486]	[1658]	[1828]	[1869]	[2285]
	56,8	4 550	26 545	46 542	67 537	88 532	108 528	128 522	148 516	168 510	187 502	207 492	211 490	258 463
Max. Inter-mittent	[20]		[154]	[328]	[515]	[710]	[874]	[1060]	[1243]	[1405]	[1579]	[1763]	[1803]	
	75,7		17 724	37 718	58 720	80 709	99 707	120 696	140 684	159 683	178 670	199 659	204 660	

		131 cm³/r [8.0 in³/r]											Max. Contin-uous	Max. Inter-mittent
		Δ Pressure Bar [PSI]												
		Continuous												
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2500]		
		14	28	41	55	69	83	97	110	124	138	172		
Flow LPM [GPM]	[2]	[219]	[450]	[682]	[915]	[1144]	[1348]	[1561]	[1771]	[1979]	[2159]			
	7,6	25 57	51 55	77 53	103 51	129 49	152 47	176 43	200 40	224 36	244 30			
	[4]	[212]	[449]	[681]	[917]	[1148]	[1376]	[1600]	[1822]	[2025]	[2221]	[2629]		
	15,1	24 115	51 113	77 110	104 109	130 107	155 105	181 102	206 99	229 96	251 91	297 75		
	[6]	[197]	[435]	[669]	[903]	[1139]	[1370]	[1600]	[1818]	[2032]	[2226]	[2718]		
	22,7	22 171	49 168	76 166	102 163	129 160	155 157	181 154	205 150	230 147	252 142	307 125		
	[8]	[181]	[417]	[657]	[886]	[1122]	[1359]	[1589]	[1812]	[2022]	[2215]	[2699]		
	30,3	20 227	47 225	74 222	100 219	127 217	154 213	180 209	205 206	228 202	250 196	305 175		
	[10]	[144]	[389]	[631]	[859]	[1098]	[1330]	[1562]	[1783]	[1993]	[2198]	[2687]		
	37,9	16 284	44 281	71 278	97 275	124 271	150 267	176 265	201 261	225 258	248 252	304 231		
Max. Contin-uous	[12]	[114]	[361]	[605]	[838]	[1075]	[1307]	[1532]	[1755]	[1965]	[2177]	[2671]		
	45,4	13 341	41 338	68 334	95 332	121 328	148 325	173 321	198 318	222 312	246 307	302 285		
Max. Inter-mittent	[14]	[82]	[327]	[569]	[803]	[1042]	[1273]	[1498]	[1722]	[1935]	[2147]	[2655]		
	53,0	9 397	37 394	64 391	91 387	118 384	144 361	169 378	195 374	219 370	243 365	300 339		
Max. Contin-uous	[15]	[66]	[302]	[550]	[785]	[1025]	[1254]	[1480]	[1704]	[1915]	[2119]	[2648]		
	56,8	7 426	34 423	62 422	89 415	116 412	142 409	167 405	193 402	216 398	239 392	299 367		
Max. Inter-mittent	[20]		[177]	[429]	[678]	[908]	[1143]	[1375]	[1596]	[1811]	[2017]			
	75,7		20 565	48 560	77 556	103 553	129 549	155 546	180 541	205 536	228 527			

[302]
34 } Torque [lb-in]
423 } Nm
Speed RPM

T Series
(158-, 185-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed. For best motor life select a motor to run with a torque and speed range shown in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production.

Continuous

Intermittent

157 cm³/r [9.6 in³/r]

Δ Pressure Bar [PSI]

Continuous

Max. Continuous

Max. Intermittent

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	
	14	28	41	55	69	83	97	110	124	138	
	[2]	[264]	[541]	[819]	[1092]	[1357]	[1605]	[1847]	[2084]	[2311]	[1858]
	7,6	30	61	93	123	153	181	209	235	261	210
		47	45	44	42	40	37	34	30	25	16
	[4]	[259]	[541]	[822]	[1101]	[1373]	[1638]	[1890]	[2145]	[2383]	[2613]
	15,1	29	61	93	124	155	185	214	242	269	295
		96	95	92	91	90	88	85	82	78	73
	[6]	[241]	[526]	[808]	[1090]	[1368]	[1638]	[1900]	[2150]	[2399]	[2628]
	22,7	27	59	91	123	155	185	215	243	271	297
		142	140	138	136	134	132	129	125	121	114
	[8]	[219]	[506]	[789]	[1068]	[1348]	[1625]	[1885]	[2140]	[2388]	[2619]
	30,3	25	57	89	121	152	184	213	242	270	296
		189	187	185	183	181	178	175	172	166	159
	[10]	[180]	[472]	[759]	[1037]	[1319]	[1590]	[1853]	[2111]	[2355]	[2594]
	37,9	20	53	86	117	149	180	209	239	266	293
		237	234	232	230	227	224	222	218	211	203
	[12]	[141]	436	[728]	[1010]	[1292]	[1561]	[1821]	[2079]	[2331]	[2573]
	45,4	16	49	82	114	146	176	206	235	263	291
		284	282	279	277	274	272	269	265	257	248
	[14]	[101]	[397]	[687]	[969]	[1252]	[1519]	[1778]	[2040]	[2295]	[2539]
	53,0	11	45	78	109	141	172	201	230	259	287
		332	329	326	323	321	319	316	311	305	296
	[15]	[81]	[367]	[665]	[944]	[1231]	[1497]	[1755]	[2018]	[2273]	[2512]
	56,8	9	41	75	107	139	169	198	228	257	284
		355	353	350	347	344	342	339	334	327	318
	[20]		[221]	[519]	[814]	[1095]	[1368]	[1631]	[1891]	[2149]	[2396]
	75,7		25	59	92	124	155	184	214	243	271
			472	467	464	462	459	455	450	443	433

195 cm³/r [11.9 in³/r]

Δ Pressure Bar [PSI]

Continuous

Max. Continuous

Max. Intermittent

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1750]	[1800]	[2000]	
	14	28	41	55	69	83	97	110	121	125	138	
	[2]	[330]	[671]	[1016]	[1345]	[1654]	[1969]	[2242]	[2507]	[2689]	[2748]	[2973]
	7,6	37	76	115	152	187	222	253	283	304	310	336
		38	36	34	33	31	28	25	20	16	14	8
	[4]	[328]	[675]	[1026]	[1366]	[1692]	[2010]	[2289]	[2586]	[2799]	[2867]	[3144]
	15,1	37	76	116	154	191	227	259	292	316	324	355
		77	77	75	73	73	71	68	65	62	61	55
	[6]	[306]	[658]	[1011]	[1360]	[1698]	[2021]	[2324]	[2604]	[2829]	[2901]	[3178]
	22,7	35	74	114	154	192	228	263	294	320	328	359
		115	113	111	110	109	107	104	100	97	95	87
	[8]	[272]	[634]	[980]	[1331]	[1675]	[2003]	[2300]	[2592]	[2815]	[2888]	[3174]
	30,3	31	72	111	150	189	226	260	293	318	326	359
		153	151	150	148	146	144	142	139	134	132	123
	[10]	[238]	[596]	[945]	[1296]	[1637]	[1960]	[2255]	[2565]	[2786]	[2857]	[3140]
	37,9	27	67	107	146	185	221	255	290	315	323	355
		192	189	188	186	184	183	181	176	168	166	156
	[12]	[181]	[545]	[908]	[1260]	[1607]	[1924]	[2223]	[2529]	[2759]	[2836]	[3121]
	45,4	20	62	103	142	182	217	251	286	312	320	353
		230	228	226	224	222	221	219	213	207	204	192
	[14]	[154]	[500]	[860]	[1211]	[1556]	[1869]	[2175]	[2483]	[2713]	[2792]	[3080]
	53,0	17	56	97	137	176	211	246	281	307	315	348
		268	266	264	261	259	259	256	251	244	242	229
	[15]	[140]	[465]	[832]	[1179]	[1525]	[1835]	[2144]	[2459]	[2693]	[2768]	[3061]
	56,8	16	53	94	133	172	207	242	278	304	313	346
		287	285	283	281	279	278	275	269	262	260	247
	[20]		[291]	[653]	[1013]	[1366]	[1689]	[1987]	[2298]	[2540]	[2622]	[2928]
	75,7		33	74	114	154	191	225	260	287	296	331
			382	378	375	373	372	368	363	356	353	342

[465] } Torque [lb-in]
53 } Nm
285 } Speed RPM

T Series

(158-, 185-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed. For best motor life select a motor to run with a torque and speed range shown in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production.

	Continuous
	Intermittent

244 cm³/r [14.9 in³/r]

Δ Pressure Bar [PSI]
Continuous

Max.
Contin-
uous

Max.
Inter-
mittent

	[200] 14	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1400] 97	[1600] 110	[1650] 114	[1800] 125	[1850] 127	[2250] 155
[2]	[406] 46 30	[833] 94 29	[1260] 142 27	[1655] 187 26	[2038] 230 24	[2403] 272 22	[2707] 306 17	[2597] 293 12	[2552] 288 11	[2373] 268 7	[2299] 260 6	
[4]	[404] 46 62	[843] 95 62	[1277] 144 60	[1695] 192 59	[2083] 235 59	[2468] 279 57	[2820] 319 55	[3177] 359 50	[3261] 368 49	[3509] 396 46	[3589] 406 44	[4194] 474 35
[6]	[382] 43 92	[823] 93 91	[1261] 142 90	[1687] 191 89	[2088] 236 88	[2477] 280 86	[2843] 321 82	[3196] 361 78	[3285] 371 76	[3547] 401 72	[3633] 410 71	[4290] 485 60
[8]	[341] 39 123	[787] 89 122	[1220] 138 121	[1651] 187 120	[2059] 233 119	[2454] 277 116	[2820] 319 113	[3177] 359 108	[3265] 369 106	[3530] 399 101	[3615] 408 99	[4285] 484 85
[10]	[297] 34 154	[744] 84 152	[1177] 133 151	[1611] 182 150	[2017] 228 148	[2412] 273 146	[2774] 313 143	[3151] 356 136	[3241] 366 134	[3504] 396 127	[3593] 406 125	[4269] 482 107
[12]	[225] 25 184	[687] 78 183	[1132] 128 181	[1553] 175 180	[1967] 222 179	[2360] 267 177	[2734] 309 173	[3105] 351 166	[3194] 361 163	[3466] 392 156	[3554] 402 153	[4237] 479 134
[14]	[154] 17 214	[628] 71 213	[1072] 121 212	[1498] 169 211	[1910] 216 209	[2298] 260 202	[2674] 302 195	[3052] 345 193	[3148] 356 193	[3419] 386 185	[3510] 397 182	[4226] 477 161
[15]	[119] 13 229	[586] 66 228	[1035] 117 227	[1458] 165 212	[1872] 212 224	[2261] 255 225	[2637] 298 217	[3022] 341 209	[3116] 352 207	[3389] 383 200	[3488] 394 197	[4220] 477 174
Max. Continuous	[20]	[372] 42 305	[816] 92 303	[1251] 141 301	[1663] 188 300	[2067] 234 297	[2448] 277 292	[2832] 320 284	[2928] 331 281	[3214] 363 273	[3312] 374 270	
Max. Intermittent	[20]											

306 cm³/r [18.7 in³/r]

Δ Pressure Bar [PSI]
Continuous

Max.
Contin-
uous

Max.
Inter-
mittent

	[200] 14	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1400] 97	[1500] 103	[1600] 110	[1800] 124
[2]	[499] 56 24	[1035] 117 23	[1560] 176 22	[2034] 230 21	[2501] 283 19	[2912] 329 16	[3239] 366 11	[2859] 323 8	[2400] 271 5	
[4]	[497] 56 49	[1052] 119 49	[1590] 180 48	[2101] 237 48	[2561] 289 47	[3023] 342 47	[3464] 391 44	[3680] 416 41	[3886] 439 38	[4221] 477 30
[6]	[480] 54 74	[1031] 116 74	[1578] 178 72	[2096] 237 72	[2564] 290 71	[3023] 342 69	[3464] 391 64	[3689] 417 62	[3905] 441 60	[4275] 483 51
[8]	[427] 48 99	[975] 110 98	[1520] 172 97	[2051] 232 97	[2525] 285 96	[2998] 339 94	[3448] 390 89	[3667] 414 86	[3881] 438 83	[4264] 482 73
[10]	[370] 42 123	[930] 105 122	[1467] 166 121	[2001] 226 120	[2477] 280 120	[2955] 334 117	[3406] 385 112	[3631] 410 108	[3852] 435 104	[4264] 482 92
[12]	[281] 32 147	[871] 98 146	[1410] 159 145	[1908] 216 145	[2400] 271 145	[2887] 326 142	[3352] 379 136	[3573] 404 131	[3790] 428 127	[4189] 473 112
[14]	[192] 22 171	[791] 89 171	[1338] 151 170	[1851] 209 170	[2338] 264 169	[2816] 318 165	[3281] 371 159	[3511] 397 154	[3743] 423 150	[4135] 467 133
[15]	[148] 17 183	[738] 83 183	[1288] 146 182	[1803] 204 182	[2287] 258 181	[2773] 313 177	[3243] 366 171	[3475] 393 165	[3705] 419 160	[4098] 463 146
Max. Continuous	[20]	[476] 54 243	[1020] 115 242	[1544] 174 242	[2010] 227 241	[2519] 285 238	[3010] 340 231	[3243] 366 226	[3495] 395 209	
Max. Intermittent	[20]									

[738]
83
183 } Torque [lb-in]
Nm
Speed RPM

370 cm³/r [22.6 in³/r]

Δ Pressure Bar [PSI]
Continuous

Max.
Contin-
uous

Max.
Inter-
mittent

	[200] 14	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1300] 90	[1500] 103
[2]	[590] 67 20	[1237] 140 19	[1858] 210 18	[2406] 272 17	[2953] 334 15	[3388] 383 12	[3586] 405 11	
[4]	[588] 66 41	[1263] 143 41	[1906] 215 40	[2506] 283 40	[3029] 342 39	[3557] 402 38	[3811] 431 37	[4252] 480 36
[6]	[580] 66 61	[1245] 141 60	[1899] 215 60	[2506] 283 59	[3029] 342 58	[3544] 400 57	[3788] 428 56	[4300] 486 54
[8]	[514] 58 82	[1164] 132 81	[1824] 206 80	[2452] 277 79	[2975] 336 78	[3518] 397 77	[3783] 427 75	[4294] 484 75
[10]	[444] 50 102	[1119] 126 102	[1759] 199 101	[2391] 270 101	[2928] 331 100	[3479] 393 97	[3750] 424 96	[4275] 483 93
[12]	[337] 38 122	[1062] 120 121	[1690] 191 120	[2256] 255 119	[2813] 318 119	[3393] 383 118	[3685] 416 116	[4273] 483 112
[14]	[231] 26 142	[958] 108 141	[1608] 182 140	[2201] 249 139	[2748] 310 138	[3319] 375 137	[3610] 408 134	[4198] 474 129
[15]	[178] 20 152	[896] 101 152	[1543] 174 151	[2147] 243 150	[2683] 303 149	[3272] 370 147	[3572] 404 146	[4187] 473 140
Max. Continuous	[20]	[587] 66 202	[1228] 139 201	[1833] 207 201	[2331] 263 200	[2948] 333 198	[3273] 370 196	
Max. Intermittent	[20]							

T Series (158-)

Dimensions

(Refer to pages B-4-19 thru B-4-22 for shaft and port dimensions.)

Ports

7/8 -14 INF O-Ring Ports (2)

1/2 -14 NPTF (2)

G 1/2 BSP (2)

Manifold Ports (5/16-18 mounting threads)

Note:


Mounting Surface Flatness Requirement is ∇ , 13 mm [.005 inch] Max.

Standard Rotation Viewed from Shaft End


Port A Pressurized — CW

Port B Pressurized — CCW

2 Bolt Flange

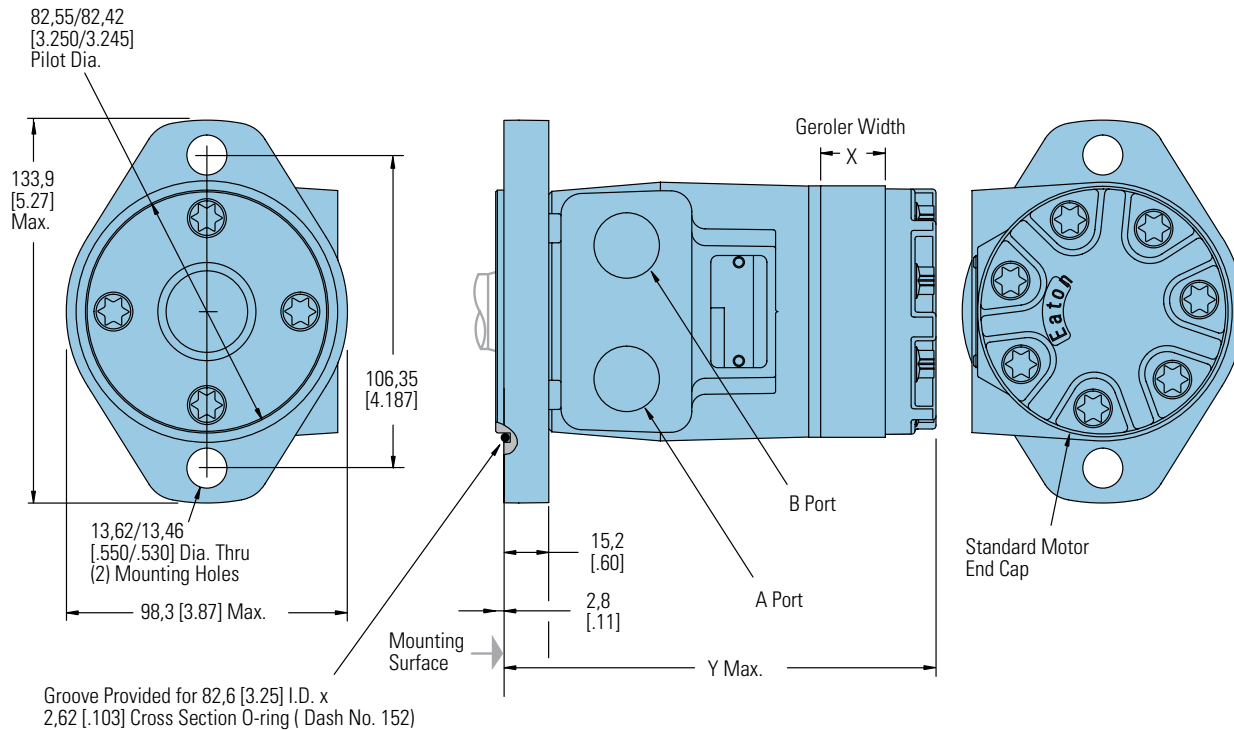

4 Bolt Flange

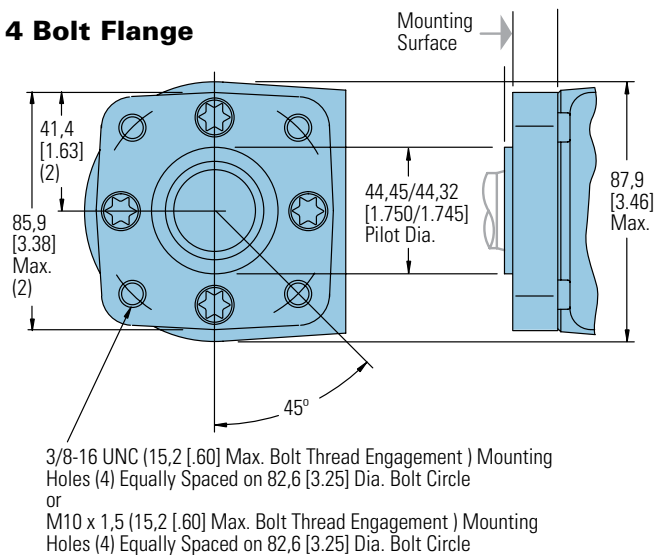

2 AND 4 BOLT FLANGE PORT DIMENSIONS

Displacement cm ³ /r [in ³ /r]	X mm [inch]	Y mm [inch]
36 [2.2]	6,6 [.26]	132,2 [5.21]
49 [3.0]	9,1 [.36]	134,6 [5.30]
66 [4.0]	12,2 [.48]	137,7 [5.42]
80 [4.9]	14,7 [.58]	140,3 [5.53]
102 [6.2]	18,5 [.73]	144,3 [5.68]
131 [8.0]	24,1 [.95]	149,6 [5.89]
157 [9.6]	29,0 [1.14]	154,5 [6.09]
195 [11.9]	35,6 [1.40]	161,3 [6.35]
244 [14.9]	44,7 [1.76]	170,3 [6.71]
306 [18.7]	56,1 [2.21]	181,6 [7.16]
370 [22.6]	72,1 [2.84]	197,9 [7.79]

T Series (158-)

Product Numbers

Use digit prefix—158- plus four digit number from charts for complete product number—Example: 158-1067.

Orders will not be accepted without the three-digit prefix.

Standard

MOUNTING	SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER										
			36 [2.2]	49 [3.0]	66 [4.0]	80 [4.9]	102 [6.2]	131 [8.0]	157 [9.6]	195 [11.9]	244 [14.9]	306 [18.7]	370 [22.6]
2 Bolt Flange	1 in. Straight w/Woodruff Key	7/8 -14 O-Ring	158- — —	—	-1537	-1034	-1035	-1538	-1036	-1037	-1038	-1039	-1040
		1/2 NPTF	158- — —	—	-1540	-1026	-1027	-1541	-1028	-1029	-1030	-1031	-1032
		Manifold*	158- — —	—	-1543	-1042	-1043	-1544	-1044	-1045	-1046	-1047	-1048
	1 in. SAE 6B Splined	7/8 -14 O-Ring	158- — —	—	-1552	-1082	-1083	-1553	-1084	-1085	-1086	-1087	-1088
		1/2 NPTF	158- — —	—	-1555	-1074	-1075	-1556	-1076	-1077	-1078	-1079	-1080
		Manifold*	158- — —	—	-1558	-1090	-1091	-1559	-1092	-1093	-1094	-1095	-1096
4 Bolt Flange	1 in. Straight w/Woodruff Key	7/8 -14 O-Ring	158- — —	—	-1570	-1010	-1011	-1571	-1012	-1013	-1014	-1015	-1016
		1/2 NPTF	158- — —	—	-1573	-1002	-1003	-1574	-1004	-1005	-1006	-1007	-1008
		Manifold*	158- — —	—	-1576	-1018	-1019	-1577	-1020	-1021	-1022	-1023	-1024
	1 in. SAE 6B Splined	7/8 -14 O-Ring	158- — —	—	-1579	-1058	-1059	-1580	-1060	-1061	-1062	-1063	-1064
		1/2 NPTF	158- — —	—	-1582	-1050	-1051	-1583	-1052	-1053	-1054	-1055	-1056
		Manifold*	158- — —	—	-1585	-1066	-1067	-1586	-1068	-1069	-1070	-1071	-1072

158-1067

T Series Motors with Corrosion Protection

MOUNTING	SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER										
			36 [2.2]	49 [3.0]	66 [4.0]	80 [4.9]	102 [6.2]	131 [8.0]	157 [9.6]	195 [11.9]	244 [14.9]	306 [18.7]	370 [22.6]
2 Bolt Flange	1 in. Straight w/ Woodruff Key	7/8 -14 O-Ring	158- — —	—	—	1645	—	—	—	—	-1649	—	-1650
4 Bolt Flange		1/2 NPTF	158- — —	—	—	—	—	—	—	—	-1620	—	-1621

158-1620

T Series Motors with Low Speed Valving

MOUNTING	SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER										
			36 [2.2]	49 [3.0]	66 [4.0]	80 [4.9]	102 [6.2]	131 [8.0]	157 [9.6]	195 [11.9]	244 [14.9]	306 [18.7]	370 [22.6]
2 Bolt Flange	1 in. Straight w/Woodruff Key	7/8 -14 O-Ring	158- — —	—	—	-1427	-1428	—	—	-1430	-1431	-1432	-1433
		1/2 NPTF	158- — —	—	—	-1419	-1420	—	—	-1422	-1423	-1424	-1425
		Manifold*	158- — —	—	—	—	—	—	—	—	—	—	—
	1 in. SAE 6B Splined	7/8 -14 O-Ring	158- — —	—	—	-1525	—	—	—	—	-1675	—	—
		1/2 NPTF	158- — —	—	—	—	-1634	—	—	—	—	—	—
		Manifold*	158- — —	—	—	-1522	-2678	—	—	—	—	—	-1527
4 Bolt Flange	1 in. Straight w/ Woodruff Key	7/8 -14 O-Ring	158- — —	—	-1625	-1410	-1411	-1626	-1412	-1413	-1414	-1415	-1416
		1/2 NPTF	158- — —	—	-1644	-1402	-1403	—	-1404	-1405	-1406	-1407	-1408

158-1403

*Manifold product numbers shown are for motors with four 5/16-18 port face mounting threads. Manifold, manifold mounting O-Rings and bolts are NOT included.

For T Series Motors with a configuration Not Shown in the charts above: Use the model code system on page B-4-10 to specify the product in detail.

T Series (158-)

Model Code

The following 25-digit coding system has been developed to identify all of the configuration options for the T motor. Use this model code to specify a motor with the desired features. All 25-digits of the code must be present when ordering. You may want to photocopy the matrix below to ensure that each number is entered in the correct box.

M	T	0	***			**		**		**		*	*	*	**		*	0	**		*	*	0	A
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25

1 Product

M – Motor

2, 3 Product Series

T0 – T Series

4, 5, 6 Displacement cm³/r [in³/r]

022 – 35 [2.2]

030 – 49 [3.0]

040 – 65 [4.0]

049 – 80 [4.9]

062 – 102 [6.2]

080 – 131 [8.0]

096 – 158 [9.6]

119 – 195 [11.9]

149 – 244 [14.9]

187 – 306 [18.7]

226 – 370 [22.6]

7, 8 Mounting Type

AA – 2 Bolt (Standard)
82,6 [3.248] Dia. and 3,05
[.120] pilot, 13,59 [.535]
Dia. Mounting Holes
106,35 [4.187] Dia. B.C.

BA – 4 Bolt (Standard)
44,40 [1.748] Dia. x 3,05
[.120] pilot, .375-16
UNC-2B Mounting Holes
82,55 [3.250] Dia. B.C.

CA – 2 Bolt (Standard)
82,50 [3.248] Dia. x 6,10
[.240] pilot, 10,41 [.410]
Dia. Mounting Holes 106,35
[4.187] Dia. B.C. (SAE A)

DD – 2 Bolt (Std.) 101,60
[4.000] Dia. x 6,10 [.240]
pilot, 14,35 [.565] Dia.
Mounting Holes 146,05
[5.750] Dia. B.C. (SAE B)
(Ductile)

EA – 4 Bolt Magneto 82,50
[3.248] Dia. x 3,05 [.120]
Pilot, 13,59 [.535] Dia.
Mounting Holes 106,35
[4.187] Dia. B.C.

FA – 4 Bolt (Standard)
44,40 [1.748] Dia. x 3,05
[.120] pilot, M10 x 1.5-6H
Mounting Holes on 82,55
[3.250] Dia. B.C.

MA - 2 Bolt (Standard)
82,50 [3.248] Dia. x 8.13
[.320] Pilot, 13,59 [.535]
Dia. Mounting Holes on
106,35 [4.187] Dia. B.C.,
w/o O-ring Groove

9, 10 Output Shaft Description

01 – 25,4 [1.00] Dia.
Straight, Woodruff Key,
.250-20 UNC-2B Hole in
Shaft End

02 – 25,4 [1.00] Dia. SAE
6B Spline, .25-20 UNC-2B
Hole in Shaft End

07 – 25,4 [1.00] Dia. Straight,
8,03 [.316] Dia. Crosshole
11,2 [.44] from End, 5,6 [.22]
Extra Length

08 – 25,4 [1.00] Dia.
Straight, 10,31 [.406] Dia.
Crosshole 15,7 [.62] from
End, .250-20 UNC-2B Hole
in Shaft End

16 – 22,22 [.875] Dia. SAE
13 Tooth Spline (SAE B)

17 – 22,22 [.875] Straight
Dia. 6,4 [2.5] x 19,0 [.75]
Square Key (SAE B)

18 – 25,4 [1.00] Dia. Tapered,
Woodruff Key and Nut,
34,92 [1.375] Taper Length

24 – 25.00 [.984] Dia.
Straight, 8.0 [.315] Key,
MB x 1.25-6H Hole in Shaft
End

39 - 25.00 [.984] Dia.
Straight (k6), 8.00 [.315]
Key, M8 x 1.25-6H Hole in
Shaft End

11, 12 Port Type

AA – .875-14 UNF-2B SAE
O-Ring Ports
AB – .500-14 NPTF Dryseal
Pipe Thread Ports

AC – Manifold (.3125-18
UNC-2B Mounting Holes)

AD – Manifold Ports (MB x
1.25-6H Mounting Holes)

AF – G 1/2 BSP Straight
Thread Ports

13 Case Flow Options

0 – None Specified

1 – .4375-20 UNF-2B SAE
O-Ring Port (End Cap)

2 – G 1/4 BSP Straight
Thread Port (End Cap)

A – Internal Check Valves

14 Geroler Options

0 – None

A – Free Running

15 Shaft Options

0 – None

N – Electroless Nickel Plated

16, 17 Seal Options

00 – Standard Seals

02 – Seal Guard

03 – Viton Seals

04 – Viton Shaft Seal

05 – Vented Two-Stage Seal

07 – High Pressure Shaft
Seal

18 Speed Sensor Options

0 – None

A – 12 mm Digital Speed
Pickup (15 Pulse) without
Lead Wire

B – Magnetic Speed Pickup
(60 Pulse by Quadrature),
No Lead Wire with M12
Connector

(A=Power, B=Common,
C=Signal)

19 Valve Options

0 – None

20, 21 Special Features (Hardware)

00 – None Specified

AB – Low Speed Valving

SS – Stainless Steel Flange
Bolts

22 Special Assembly Instructions

0 – None

A – Reverse Rotation

2 – Flange Rotation 90°

23 Paint/Packaging Options

0 – No Paint

A – Low Gloss Black
Primer

D – Environmental Coated
Gloss White

24 Customer ID/ Nameplate Options

0 – None Specified


25 Design Code

A – One (1)

Feature in **bold** are preferred and
allow for shorter lead time.

T Series with Parking Brake (185-)

Highlights

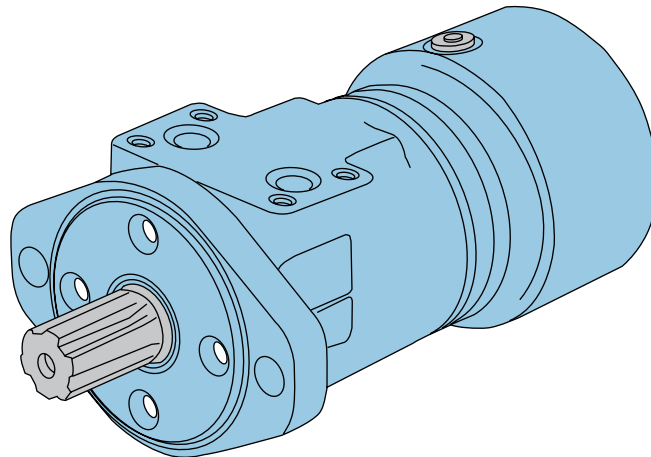

Description

Eaton's latest offering in LSHT motor technology is the new T Series Motor with Parking Brake.

T Series Motor with Parking Brake utilizes brake pads that rotate at 6 times the speed of the output shaft, thereby giving the brake a 6-to-1 mechanical advantage. The T Series Motor with Parking Brake utilizes the same Geroler, and Spool Valve technologies as the standard Char-Lynn motors. Therefore, in addition to providing dependable load-holding capability, T Series Motor with Parking Brake provides the same smooth, reliable operation, with similar performance, as the T Series Motor.

Specifications

Geroler Element	11 Displacements
Flow l/min [GPM]	55 [15] Continuous
	75 [20] Intermittent
Speed	Up to 1055 RPM
Pressure bar [PSI]	155 [2250] Cont.
	190 [2750] Inter.
Torque Nm [lb-in]	441 [3905] Cont.
	486 [4300] Inter.

Features

- Integrated, Compact, Patented Design
- Capability of Combining 4 inventory items into a single assembly (motor, brake, counter-balance valve, brake release line)
- Rear-mounted integrated brake with 6:1 torque advantage
- Access port for manual brake release (for over-riding brake in the event of loss of release pressure.)

Benefits

- Cost-effective Packaged System Solution
- Simplifies ordering and inventory requirements
- Reduces assembly labor
- Design Flexibility
- Wet brake is environmentally protected and provides long life

Applications

- Truck-Mounted Equipment (boom rotate and winch)
- Conveyors – Positioners – Indexers
- Marine Cranes (boom rotate and winch)
- Fishing Winches
- Recycling and Refuse Equipment
- Vehicle Recovery Winches
- Mining Equipment
- Specialty Utility Vehicles/ Machines
- Forestry Grapples
- Agricultural Equipment
- Railroad Equipment
- Airport Support Vehicles
- Lawn & Turf Equipment
- Anywhere Load-Holding is Needed in a Low-Speed High-Torque Drive System

B-4



Crane and winches



Boom Lift (Swing)



Maintenance Equipment

T Series with Parking Brake (185-)

Application Information

Principle of Operation

The wet brake is a spring-applied / pressure release design. Load-holding is applied by a mechanical spring and released by hydraulic pressure. The spring force holds the brake on when hydraulic pressure is absent.

Release Pressure

Release pressure is defined as the amount of pressure required to fully release the brake. The brake pressure cavity is common (shared) with the motor case. As a result, maximum release pressure is constrained by the motor case-pressure capability. The T Series Motor with Parking Brake incorporates a shaft seal capable up to 1500 psi (see page B-4-15). However, seal life is reduced at higher case pressure.

Residual Pressure

Residual pressure is the pressure trapped in the system by restrictions or long return lines.

Residual pressure in the motor case will lower the rated load holding torque of the brake.

Therefore, special attention needs to be given when applying this product. Keep in mind that long return lines create higher pressure that will reduce brake holding torque. In applications with high system pressures, the use of a pressure reducing valve to limit case and release pressure is recommended.

Holding Torque and Motor Output Torque

Holding torque is based on grade holding requirements for a vehicle or other load holding requirements in the application. System pressure and motor displacement are the factors in determining motor output torque. Motor displacement, measured in cubic centimeters or cubic inches, is the volume of fluid required to make one revolution. Motor output torque is the rotary force and is usually measured in inch pounds, newton meters or foot pounds. Maximum motor torque depends on pressure and motor displacement. Both output shaft size and shaft type can also affect motor torque. The T Series Motor with Parking Brake load holding capacity is factory set to match any limiting factor in each specific motor configuration (e.g. displacement, output shaft, etc).

Note:

Eaton Corporation does not approve any products for customer applications. It is the sole responsibility of the customer to qualify and verify the correct operation of products in their systems.

Note:


Special attention should be given to system back pressure. System back pressure directly affects brake release pressure and can cause the brake to release at undesired conditions.

Note:


The T Series with parking brake is not compatible with water based fluids.

Typical Applications


Winch

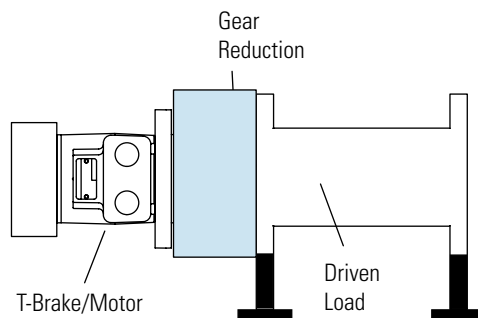

Machine Drive

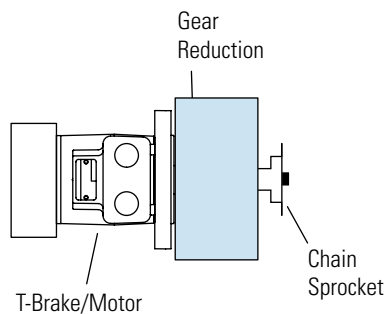


Swing Boom

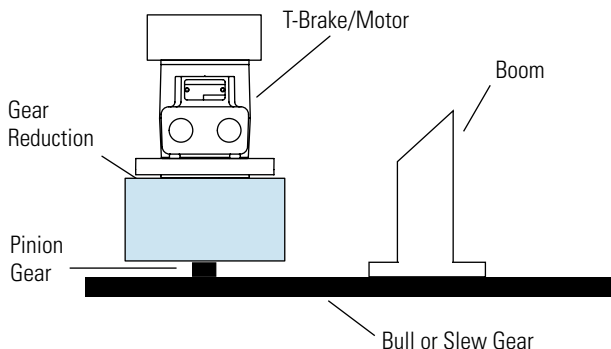

T Series with Parking Brake (185-)

Specifications

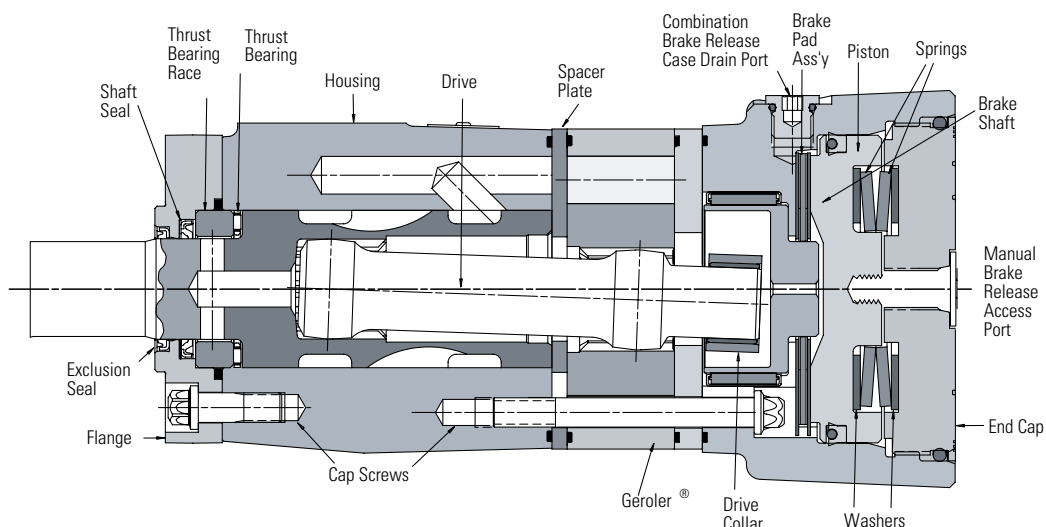

B-4

SPECIFICATION DATA – T SERIES WITH PARKING BRAKE MOTORS

Displ. cm ³ /r [in ³ /r]		36 [2.2]	49 [3.0]	66 [4.0]	80 [4.9]	102 [6.2]	131 [8.0]	157 [9.6]	195 [11.9]	244 [14.9]	306 [18.7]	370 [22.6]
Max. Speed (RPM) @ Continuous Flow		1021	906	849	694	550	426	355	287	229	183	152
Flow LPM [GPM]	Continuous	38 [10]	45 [12]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]
	Intermittent	38 [10]	57 [15]	68 [18]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]
Torque Nm [lb-in]	Continuous	76 [672]	105 [928]	138 [1222]	174 [1541]	219 [1936]	251 [2226]	297 [2628]	359 [3178]	410 [3633]	441 [3905]	430 [3811]
	Intermittent **	93 [824]	118 [1131]	168 [1488]	212 [1872]	264 [2339]	307 [2718]	359 [3178]	437 [3864]	485 [4290]	483 [4275]	486 [4300]
Pressure Δ Bar [Δ PSI]	Continuous *	155 [2250]	155 [2250]	155 [2250]	155 [2250]	155 [2250]	138 [2000]	138 [2000]	138 [2000]	127 [1850]	110 [1600]	90 [1300]
	Intermittent * **	190 [2750]	190 [2750]	190 [2750]	190 [2750]	190 [2750]	172 [2500]	172 [2500]	172 [2500]	155 [2250]	124 [1800]	103 [1500]

Note:

See page B-4-2 for additional motor specification notes and definitions. The T Series with Parking Brake performance is similar to the standard T Series motor. High speed conditions may reduce performance on T Series with Parking Brake.

T SERIES BRAKE HOLDING TORQUE SETTINGS:

Shaft Code	Output Shaft Description	[in ³ /r]	2.2	3.0	4.0	4.9	6.2	8.0	9.6	11.9	14.9	18.7	22.6
18	1 Tapered w/key and nut		2,000	2,000	2,000	3,500	3,500	3,500	5,000	5,000	5,000	5,000	5,000
02	1 SAE 6B Splined		2,000	2,000	2,000	3,500	3,500	3,500	5,000	5,000	5,000	5,000	5,000
24	25mm Straight w/key		2,000	2,000	2,000	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500
01	1 Straight w/key		2,000	2,000	2,000	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500
07	1 Straight w/.31 dia. crosshole		2,000	2,000	2,000	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500
08	1 Straight w/.40 dia. crosshole		2,000	2,000	2,000	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500
16	7/8 SAE B 13T Splined		2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000
17	7/8 SAE B Straight w/key		2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000

in-lbs Full Capacity Brake

in-lbs Limited Capacity Brake

Note:

The factory setting values are used for each motor based on motor displacement and shaft type. Average Static torque may vary +/- 14% from rated values.



T Series with Parking Brake (185-)

Standard Rotation Viewed from Shaft End

Port A Pressurized — CW
Port B Pressurized — CCW

Dimensions

(Refer to pages B-4-19 thru B-4-22 for shaft and port dimensions.)

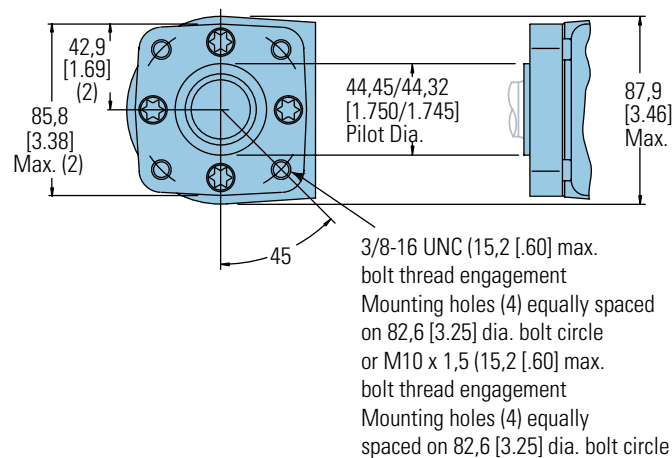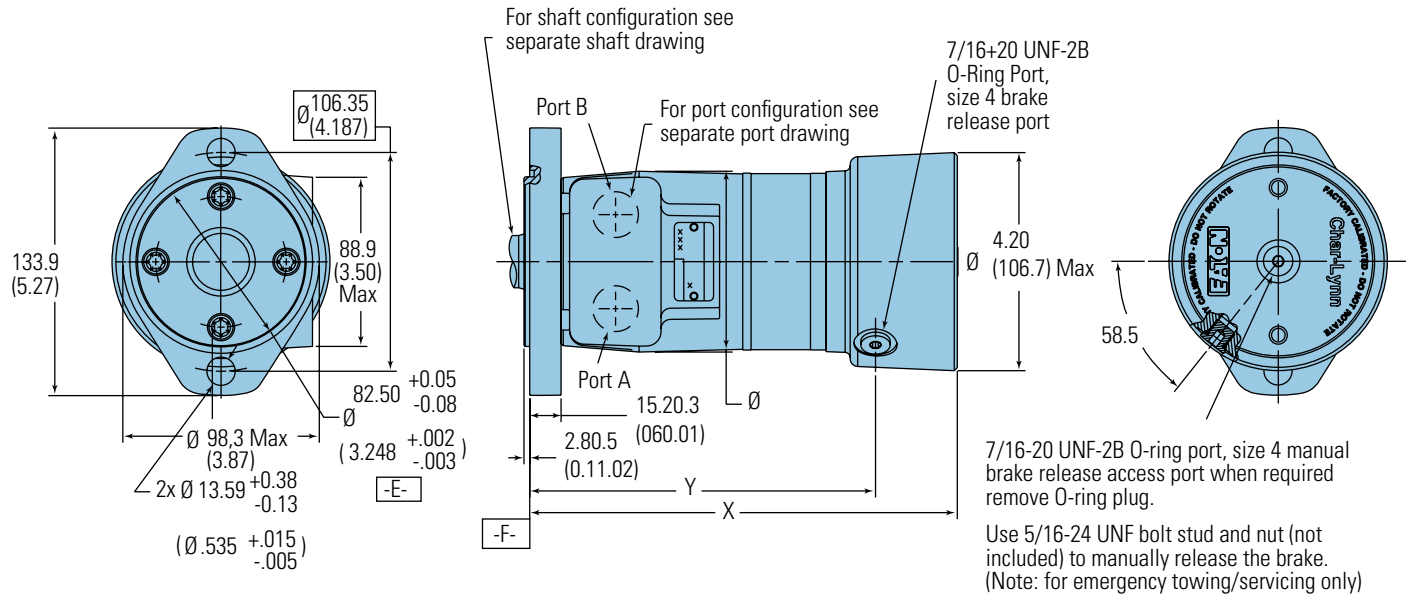

T-SERIES WITH PARKING BRAKE DIMENSIONS

Displacement cm ³ /r [in ³ /r]	X mm [inch]	Y mm [inch]
02	190.2 [7.49]	143.9±0.9 [5.66±0.3]
A2	190.8 [7.51]	144.5±0.9 [5.69±0.3]
03	192.5 [7.58]	146.3±0.9 [5.76±0.3]
A3	194.3 [7.65]	148.1±0.9 [5.83±0.3]
04	195.6 [7.70]	149.3±0.9 [5.88±0.3]
05	198.4 [7.81]	152.0±0.9 [5.98±0.3]
06	202.2 [7.96]	155.9±0.9 [6.14±0.3]
08	207.5 [8.17]	161.3±0.9 [6.35±0.3]
10	212.6 [8.37]	166.2±0.9 [6.54±0.3]
12	219.2 [8.63]	172.9±0.9 [6.81±0.3]
15	228.3 [8.99]	181.9±0.9 [7.16±0.3]
19	239.5 [9.43]	193.3±0.9 [7.61±0.3]
23	251.2 [9.89]	205.0±0.9 [8.07±0.3]

Note:

Standard Rotation

When facing shaft end of motor shaft to rotate clockwise when port "A" is pressurized, counterclockwise when port "B" is pressurized

Reverse Rotation



When facing shaft end of motor shaft will rotate clockwise when port "B" is pressurized, counterclockwise when port "A" is pressurized

T Series with Parking Brake (185-)

Brake Release and Motor Case Pressure

The T Series Motor with Parking Brake is durable and has long life as long as the recommended case pressure is not exceeded. Allowable case pressure is highest at low shaft speeds. Motor life will be shortened if case pressure exceeds recommended ratings (acceptability may vary with application).


Refer to the Case Pressure/ Shaft Seal chart below. This chart is based on case pressure and motor shaft speed. A minimum release pressure of 17 Bar [250 PSI] must be maintained to fully release the brake.

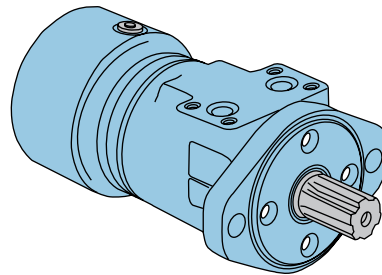

$$P_C \approx 6 DP + P_2$$

P_C = Case Pressure
 P_1 = Inlet Line Pressure
 P_2 = Back Pressure
 $DP = P_1 - P_2$

Case Pressure/Shaft Seal

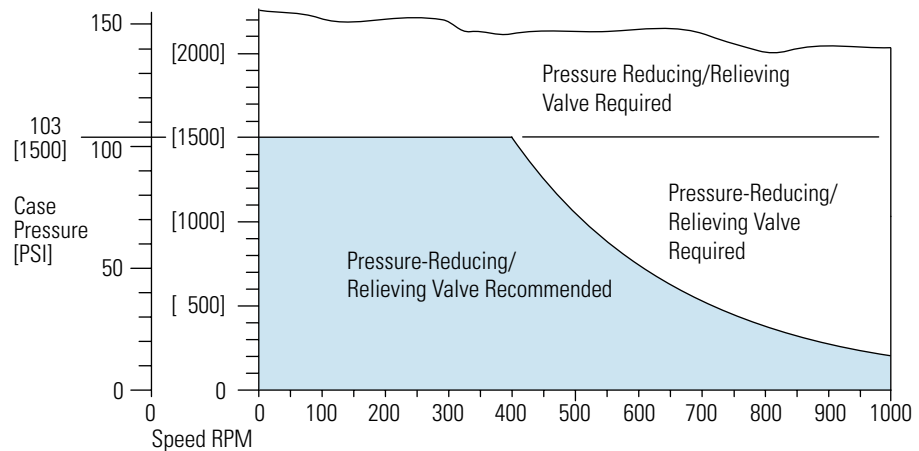

T Series with Parking Brake (185-)

Product Numbers

Use digit prefix —
185 plus four digit number
from charts for complete
product number —
Example 185-2068.

**Orders will not be accepted
without three digit prefix.**

Standard Valving

MOUNTING	SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER									
			3.0	4.0	4.9	6.2	8.0	9.6	11.9	14.9	18.7	22.6
2-Bolt	1 Keyed	7/8-14 O-Ring Manifold	185-2000 185-2010	2001 2011	2002 2012	2003 2013	2004 2014	2005 2015	2006 2016	2007 2017	2008 2018	2009 2019
	6B Splined	7/8-14 O-Ring Manifold	185-2020 185-2030	2021 2031	2022 2032	2023 2033	2024 2034	2025 2035	2026 2036	2027 2037	2028 2038	2029 2039
	13T Splined 16/32 pitch	7/8-14 O-Ring Manifold	185-2040 185-2050	2041 2051	2042 2052	2043 2053	2044 2054	2045 2055	2046 2056	2047 2057	2048 2058	2049 2059
4-Bolt	1 Keyed	7/8-14 O-Ring Manifold	185-2060 185-2070	2061 2071	2062 2072	2063 2073	2064 2074	2065 2075	2066 2076	2067 2077	2068 2078	2069 2079
	6B Splined	7/8-14 O-Ring Manifold	185-2080 185-2090	2081 2091	2082 2092	2083 2093	2084 2094	2085 2095	2086 2096	2087 2097	2088 2098	2089 2099
	13T Splined 16/32 pitch	7/8-14 O-Ring Manifold	185-2100 185-2110	2101 2111	2102 2112	2103 2113	2104 2114	2105 2115	2106 2116	2107 2117	2108 2118	2109 2119
2-Bolt SAE B	1 Keyed	7/8-14 O-Ring Manifold	185-2120 185-2130	2121 2131	2122 2132	2123 2133	2124 2134	2125 2135	2126 2136	2127 2137	2128 2138	2129 2139
	6B Splined	7/8-14 O-Ring Manifold	185-2140 185-2150	2141 2151	2142 2152	2143 2153	2144 2154	2145 2155	2146 2156	2147 2157	2148 2158	2149 2159
	13T Splined 16/32 pitch	7/8-14 O-Ring Manifold	185-2160 185-2170	2161 2171	2162 2172	2163 2173	2164 2174	2165 2175	2166 2176	2167 2177	2168 2178	2169 2179

Low Speed Valving

MOUNTING	SHAFT	PORT SIZE	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER									
			3.0	4.0	4.9	6.2	8.0	9.6	11.9	14.9	18.7	22.6
2-Bolt	1 Keyed	7/8-14 O-Ring Manifold	185-2180 185-2190	2181 2191	2182 2192	2183 2193	2184 2194	2185 2195	2186 2196	2187 2197	2188 2198	2189 2199
	6B Splined	7/8-14 O-Ring Manifold	185-2200 185-2210	2201 2211	2202 2212	2203 2213	2204 2214	2205 2215	2206 2216	2207 2217	2208 2218	2209 2219
	13T Splined 16/32 pitch	7/8-14 O-Ring Manifold	185-2220 185-2230	2221 2231	2222 2232	2223 2233	2224 2234	2225 2235	2226 2236	2227 2237	2228 2238	2229 2239
4-Bolt	1 Keyed	7/8-14 O-Ring Manifold	185-2240 185-2250	2241 2251	2242 2252	2243 2253	2244 2254	2245 2255	2246 2256	2247 2257	2248 2258	2249 2259
	6B Splined	7/8-14 O-Ring Manifold	185-2260 185-2270	2261 2271	2262 2272	2263 2273	2264 2274	2265 2275	2266 2276	2267 2277	2268 2278	2269 2279
	13T Splined 16/32 pitch	7/8-14 O-Ring Manifold	185-2280 185-2290	2281 2291	2282 2292	2283 2293	2284 2294	2285 2295	2286 2296	2287 2297	2288 2298	2289 2299
2-Bolt SAE B	1 Keyed	7/8-14 O-Ring Manifold	185-2300 185-2310	2301 2311	2302 2312	2303 2313	2304 2314	2305 2315	2306 2316	2307 2317	2308 2318	2309 2319
	6B Splined	7/8-14 O-Ring Manifold	185-2320 185-2330	2321 2331	2322 2332	2323 2333	2324 2334	2325 2335	2326 2336	2327 2337	2328 2338	2329 2339
	13T Splined 16/32 pitch	7/8-14 O-Ring Manifold	185-2340 185-2350	2341 2351	2342 2352	2343 2353	2344 2354	2345 2355	2346 2356	2347 2357	2348 2358	2349 2359

185-2357

Motors with the low speed valving option enable very smooth low speed operation while maintaining high torque.

Designed to run continuously at up to 200 RPM at standard rated pressures and reduced

flows, this option provides smooth operation at low speeds. Furthermore, they resist slippage and have more momentary load holding ability than the standard motors.

Motors with this valving are not intended for low pressure applications (A minimum of 300 psi delta must be maintained between A port pressure and case pressure).

Shaft side / radial load ratings are not affected by

this valving.

For a T Series motor with parking brake configuration not shown in the charts above use the model code system on page B-4-17 to specify the product in detail.

T Series with Parking Brake (185-)

Model Code

The following 25-digit coding system has been developed to identify all of the configuration options for the T Series Motor with Parking Brake. Use this model code to specify a motor with the desired features. All 25-digits of the code must be present when ordering. You may want to photocopy the matrix below to ensure that each number is entered in the correct box.

M	T B		***			**		**		**		*	*	*	**		*	0	**		*	*	0	B
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25


1 Product M – Motor	DA – 2 Bolt (Std.) 101,60 [4.000] Dia. x 6,10 [.240] pilot, 14,35 [.565] Dia. Mounting Holes 146,05 [5.750] Dia. B.C. (SAE B) EA – 4 Bolt Magneto 82,50 [3.248] Dia. x 3,05 [.120] Pilot, 13,59 [.535] Dia. Mounting Holes 106,35 [4.187] Dia. B.C. FA – 4 Bolt (Standard) 44,40 [1.748] Dia. x 3,05 [.120] pilot, M10 x 1.5-6H Mounting Holes on 82,55 [3.250] Dia. B.C.	11, 12 Port Type AA – .875-14 UNF-2B SAE O-Ring Ports AB – .500-14 NPTF Dryseal Pipe Thread Ports AC – Manifold (.3125-18 UNC-2B Mounting Holes) AD – Manifold Ports (MB x 1.25-6H Mounting Holes)	19 Valve Options 0 – None 20, 21 Special Features (Hardware) 00 – None Specified AB – Low Speed Valving
2, 3 Series T B – T Series Motor with Parking Brake 4, 5, 6 Displacement cm³/r [in³/r] 022 – 36 [2.2] 030 – 49 [3.0] 040 – 66 [4.0] 049 – 80 [4.9] 062 – 102 [6.2] 080 – 131 [8.0] 096 – 157 [9.6] 119 – 195 [11.9] 149 – 244 [14.9] 187 – 306 [18.7] 226 – 370 [22.6]	9, 10 Output Shaft Description 01 – 25,4 [1.00] Dia. Straight, Woodruff Key, .250-20 UNC-2B Hole in Shaft End 02 – 25,4 [1.00] Dia. SAE 6B Spline, .25-20 UNC-2B Hole in Shaft End 16 – SAE 13 Tooth Spline, 16/32 Pitch, 21,74 (.856) Dia. (SAE B) 18 – 25,4 [1.00] Dia. Tapered, Woodruff Key and Nut, 34,92 [1.375] Taper Length 24 – 25.00 [.984] Dia. Straight, 8.0 [.315] Key, MB x 1.25-6H Hole in Shaft End	13 Case Flow Options 0 – None Specified 3 – Manifold Case Drain 14 Geroler Options A – Standard B – Free Running 15 Shaft Options 0 – None N – Electroless Nickel Plated	22 Special Assembly Instructions 0 – None 2 – Flange Rotation 90° 23 Paint/Packaging Options 0 – No Paint A – Low Gloss Black Primer
7, 8 Mounting Type AA – 2 Bolt (Standard) 82,5 [3.248] Dia. and 3,05 [.120] pilot, 13,59 [.535] Dia. Mounting Holes 106,35 [4.187] Dia. B.C. BA – 4 Bolt (Standard) 44,40 [1.748] Dia. x 3,05 [.120] pilot, .375-16 UNC-2B Mounting Holes 82,55 [3.250] Dia. B.C. CA – 2 Bolt (Standard) 82,50 [3.248] Dia. x 6,10 [.240] pilot, 10,41 [.410] Dia. Mounting Holes 106,35 [4.187] Dia. B.C. (SAE A)		16, 17 Seal Options 00 – Standard Seals 03 – Viton Seals 05 – Vented Two-Stage Seal 07 – High Pressure Shaft Seal 18 Speed Sensor Options 0 – None A – 12 mm Digital Speed Pickup (15 Pulse) without Lead Wire (A=Power, B=Common, C=Signal)	24 Customer ID/ Nameplate Options 0 – None Specified 25 Design Code B – Two (2)

B-4

Case Pressure and Case Drain — H, S, and T Series



Char-Lynn H Series, S Series and T Series motors are durable and have long life as long as the recommended case pressure is not exceeded. Allowable case pressure is highest at low shaft speeds. Consequently, motor life will be shortened if case pressure exceeds these ratings (acceptability may vary with application). Determine if an external case drain is required

from the case pressure seal limitation chart below — chart based on case pressure and shaft speed. If a case drain line is needed, connect drain line to assure that the motor will always remain full of fluid. A pressure restriction should be added to the case drain line, during which a motor case pressure of 3,5 Bar [50 PSI] is maintained.



$$P_C \approx 6 \Delta P + P_2$$

P_C = Case Pressure
 P_1 = Inlet Line Pressure
 P_2 = Back Pressure
 $\Delta P = P_1 - P_2$

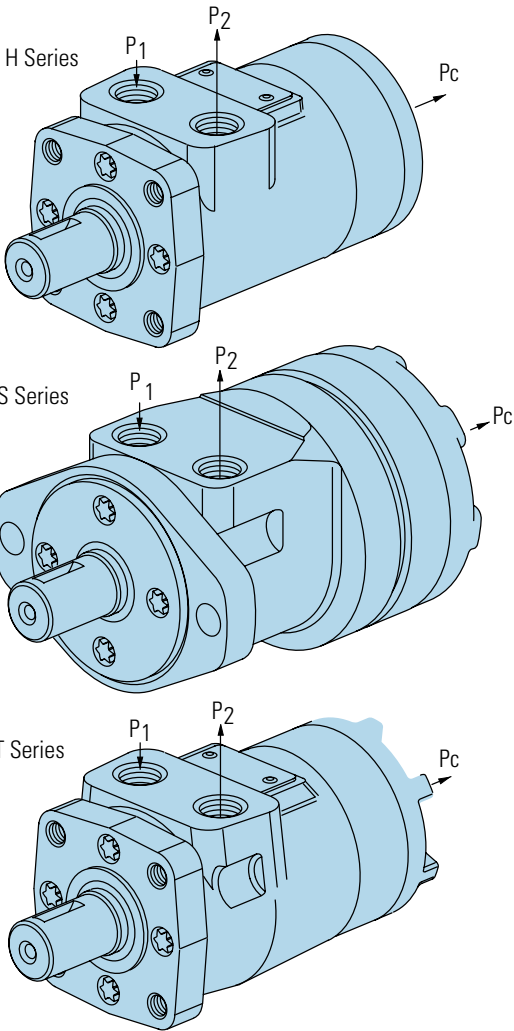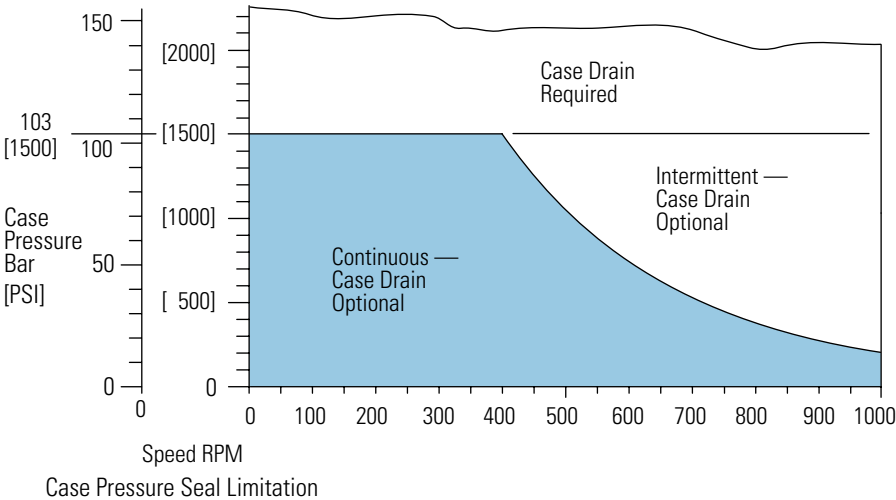

H, S and T Series (101-, 103-, 158-, 185-)

Side Load Capacity

The hydrodynamic bearing has infinite life when shaft load ratings are not exceeded. Hence, the shaft side load capacity is more than adequate to handle most externally applied loads (such as belts, chains, etc.), providing the motor to shaft size is applied within its torque rating.

Allowable side load chart, shaft load location drawing and load curves (below) are based on the side / radial loads being applied to shaft at locations A, B, and C, to

determine the shaft side load capacity at locations other than those shown use the formula (shown below).

For more information about shaft side loads on Char-Lynn motors contact your Eaton representative.

Note:

When the speed sensor option is used, side load ratings are reduced 25%.

RPM	ALLOWABLE SHAFT SIDE LOAD – KG [LB]		
	A	B	C
900	154 [339]	136 [300]	118 [261]
625	205 [452]	181 [400]	158 [348]
500	256 [565]	227 [500]	197 [435]
400	307 [678]	272 [600]	237 [522]
300	410 [904]	363 [800]	316 [696]
200	718 [1582]	635 [1400]	552 [1216]

B-2

B-3


B-4

$$\text{Sideload P kg} = \frac{900}{N} \left(\frac{16800}{L + 96,3} \right) \text{ for 200-900 RPM}$$

$$\text{Sideload P [lb]} = \frac{900}{N} \left(\frac{1460}{L + [3.79]} \right) \text{ for 200-900 RPM}$$

Where N = Shaft Speed (RPM)

L = Distance from Mounting Surface

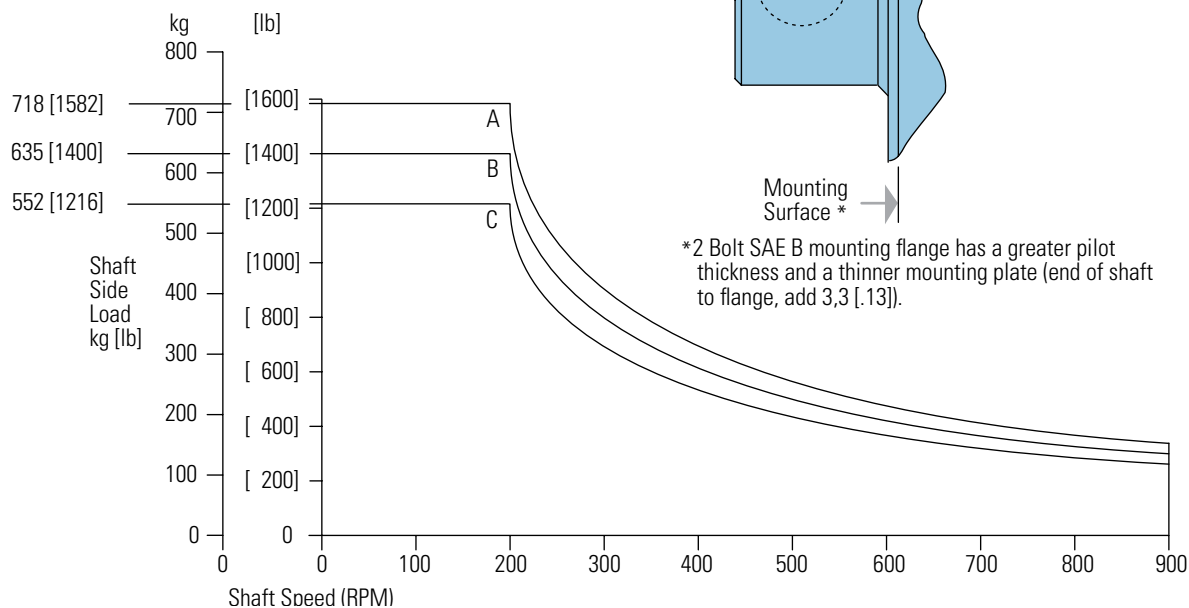


H, S and T Series (101, 103- 158, 185)


Dimensions

Shafts


Shaft Size Motor Torque Combination Limit Guide

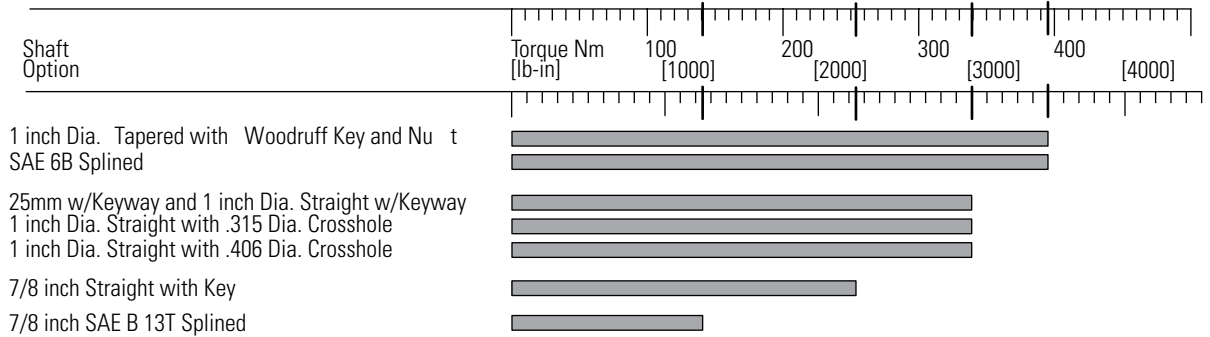


1 in. Dia. Straight with Woodruff Key

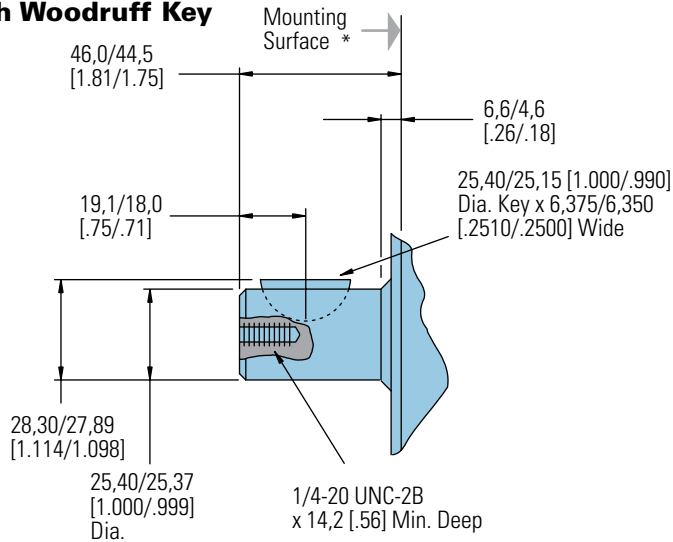


SAE 6B Splined Shaft

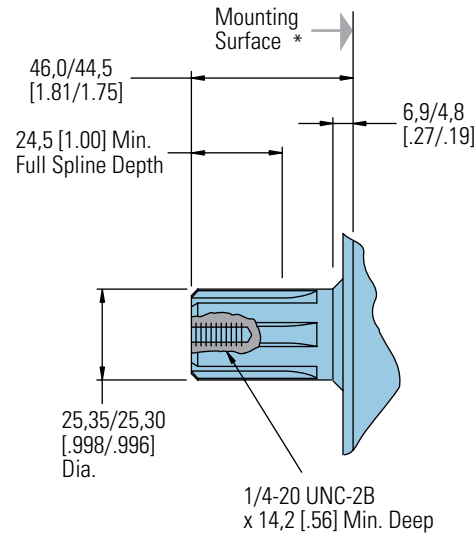

1 in. Dia. Straight Shaft with .315 Dia. Crosshole

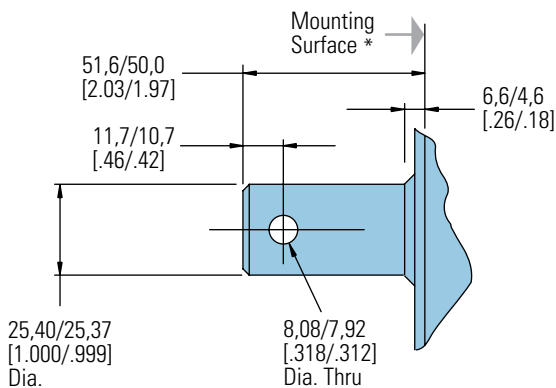

1 in. Dia. Straight Shaft with .406 Dia. Crosshole

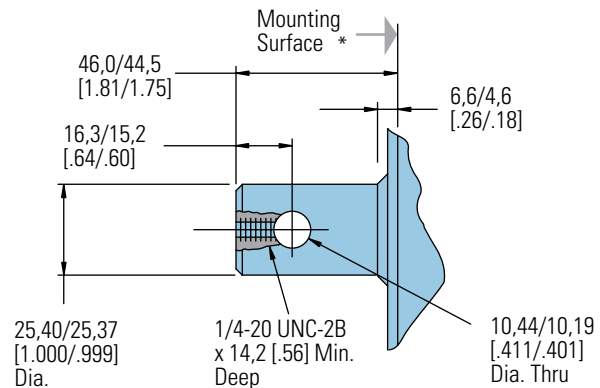


* 2 Bolt SAE B mounting flange has a greater pilot thickness and a thinner mounting plate (end of shaft to flange, add 3,3 [.13]).

H, S and T Series (101-, 103- 158-, 185-)


Dimensions

Shafts


1 in. Dia. Tapered Shaft with Woodruff Key and Nut

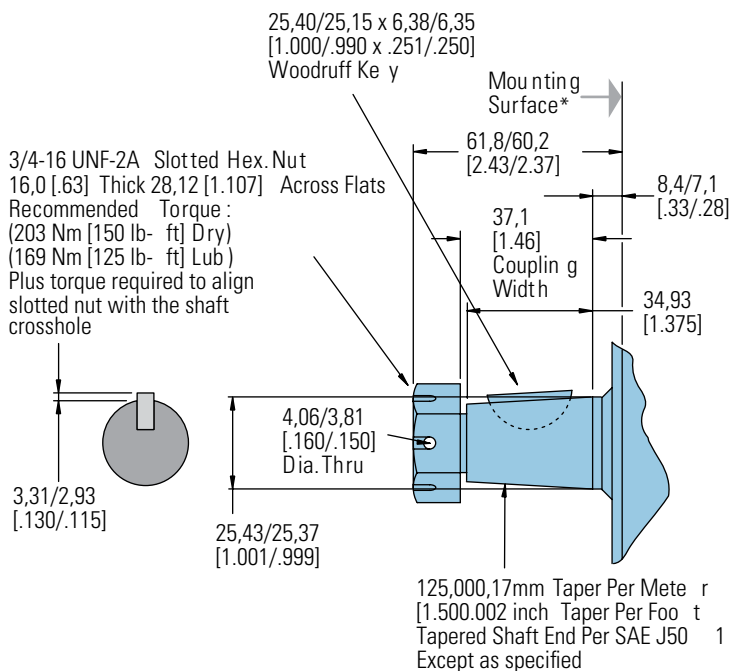


25mm Dia. Straight Shaft with 8mm Keyway

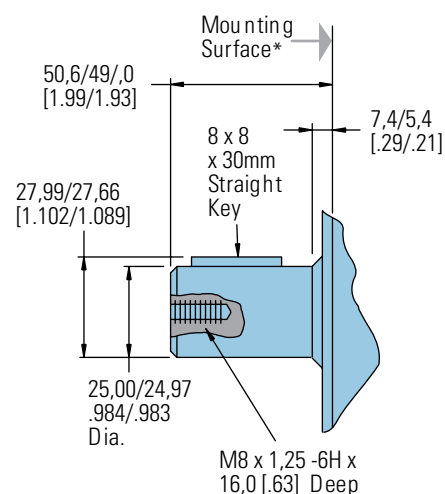

7/8 in. Dia. Straight Shaft with Key

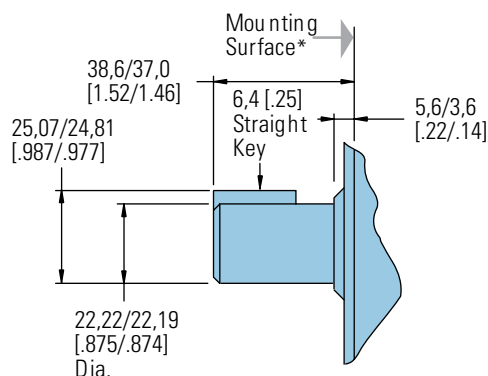

7/8 in. Dia. SAE B Shaft 13T Splined

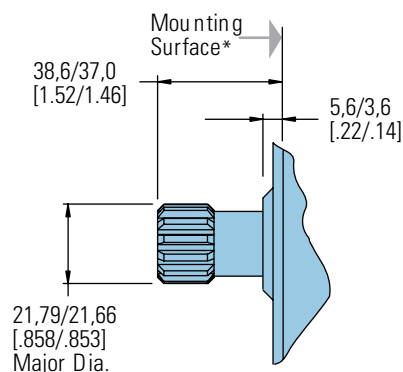

* 2 Bolt SAE B mounting flange has a greater pilot thickness and a thinner mounting plate (end of shaft to flange, add 3,3 [.13]).


H, S and T Series (101-, 103- 158-, 185-)

Mounting Options


Note:

Mounting Surface Flatness
Requirement is ,13 mm
[.005 inch] Max.


4 Bolt Magneto

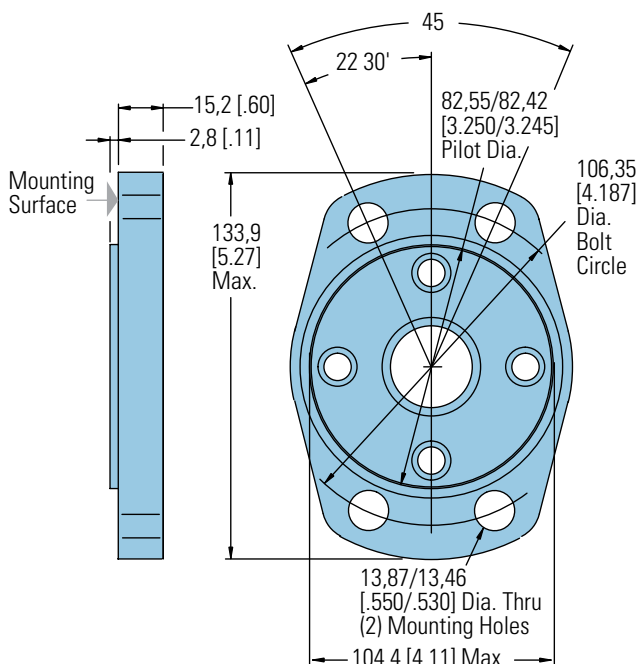

2 Bolt SAE B

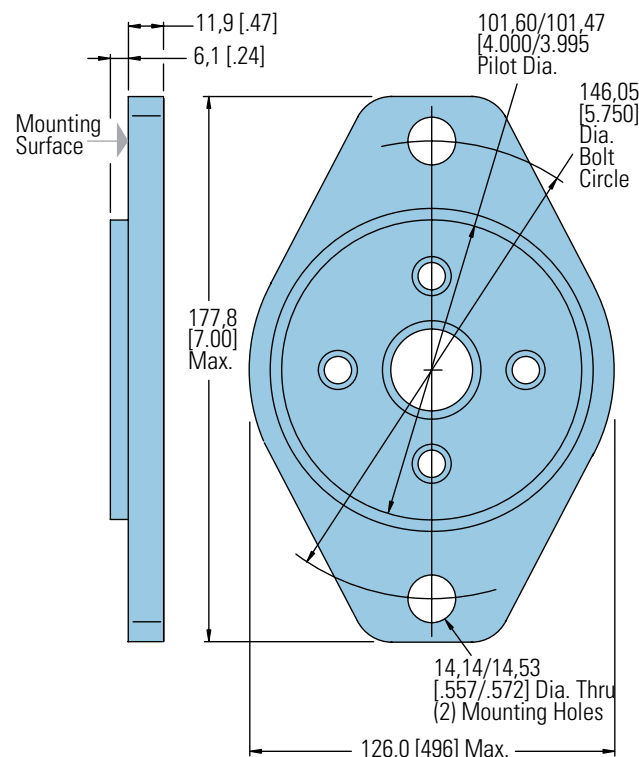

Base Block Mounting Kits

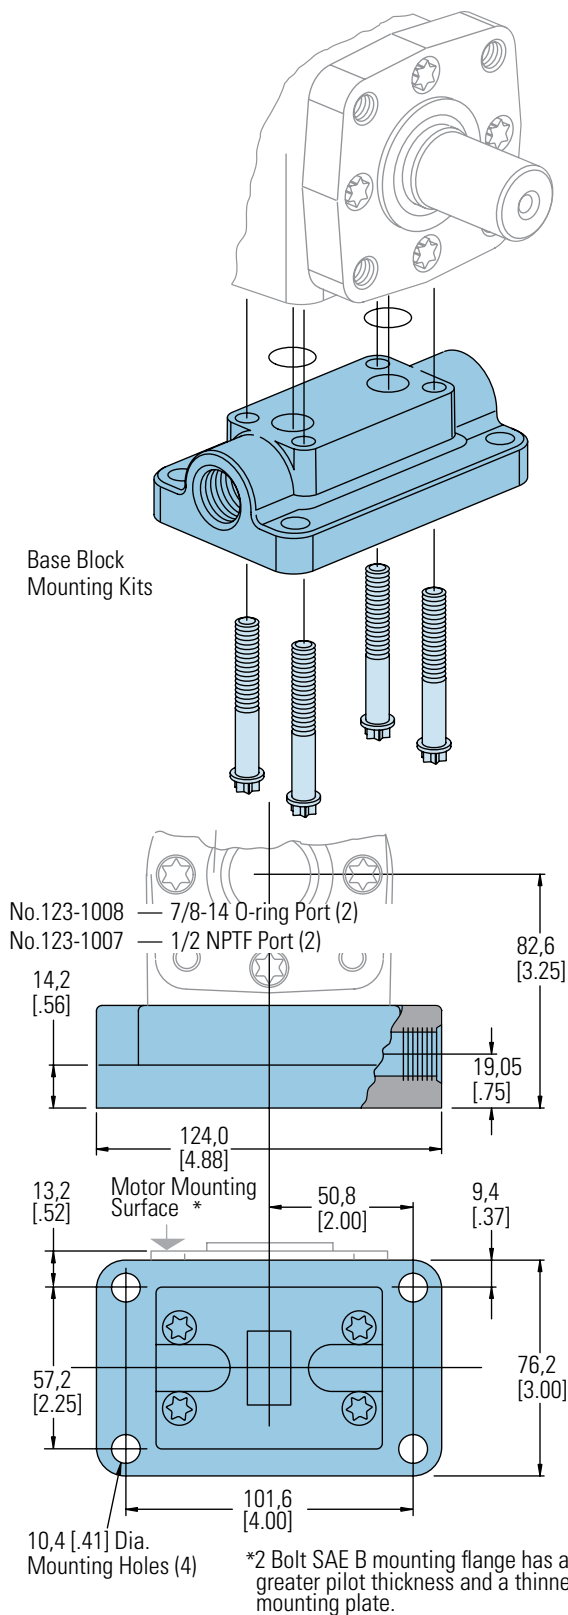

H, S and T Series (101-, 103-, 158-, 185-)

Dimensions

Ports

Ports

End Ports — H Series only

G 1/2 (BSP) (2)

or 3/4-16 O-Ring (2)


Standard Rotation Viewed from Drive End

Port A Pressurized — CW


Port B Pressurized — CCW

Note:


End ported motor pressure is derated. Reference page B-2-2 for ratings.

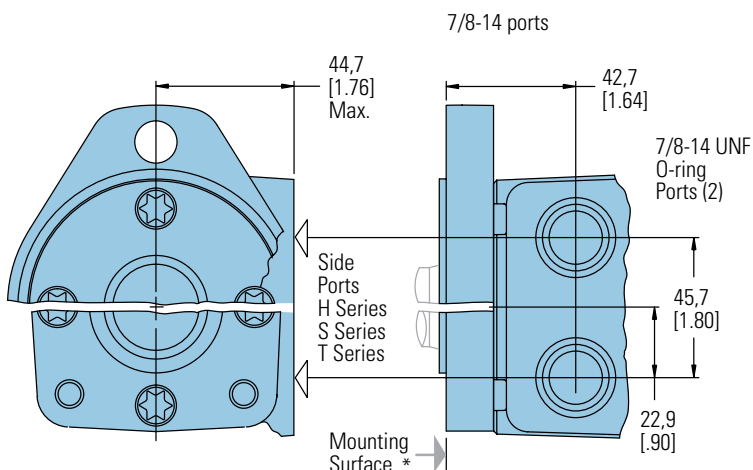



End Ports (H Series only)

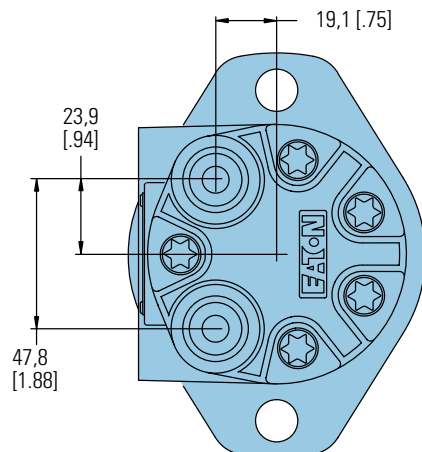

Use of Teflon Tape Sealant/Lubricant (with 1/2 14 NPTF Port Connectors only).




When using fittings with Teflon tape, be careful when taping and tightening. Over tightening or improperly taped fittings can cause damage to housing or leakage.

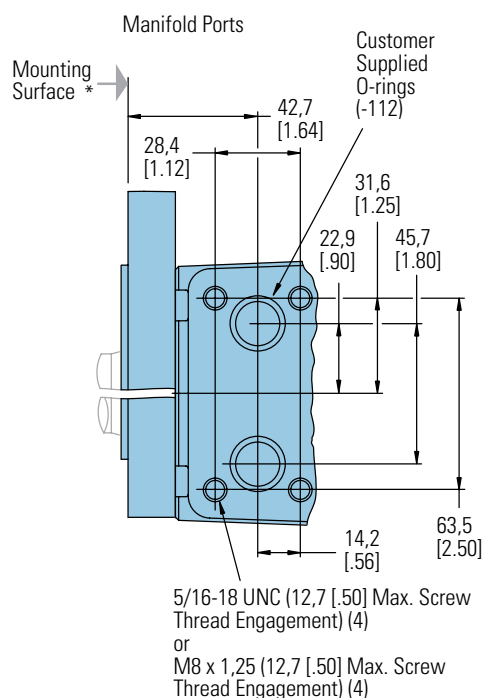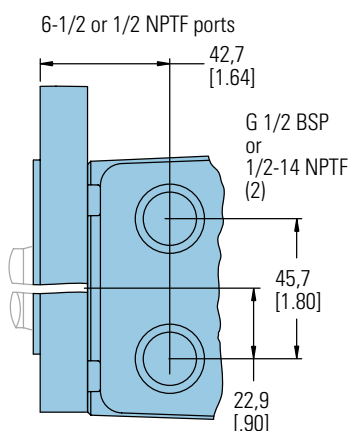

Use the following procedures:

- Wrap approx. 1 1/2 Turns of 13 mm [1/2 in.] wide Teflon Tape around fitting threads — start tape 2 threads up from end of fitting.
- Tighten threads to a Maximum of 34 Nm [25 lb-ft]. — Do Not Tighten Further —
- If fittings leak when tightened to maximum torque, either retape, reseal, or replace fittings.

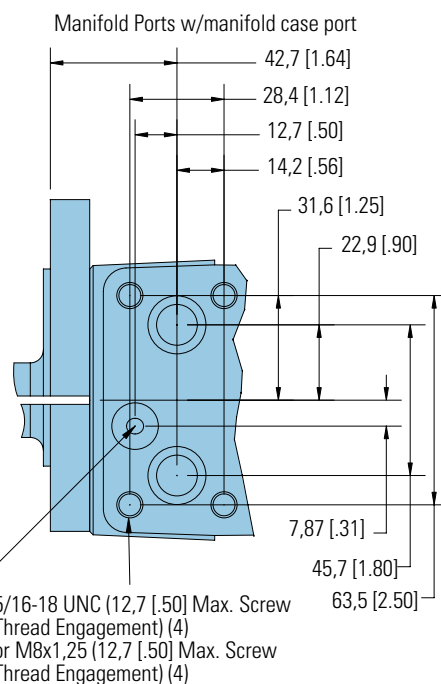


*2 Bolt SAE B mounting flange has a greater pilot thickness and a thinner mounting plate.

Note:

End ported motor option is derated to 1400 continuous, 1700 psi intermittent.

W Series (162-)

Highlights

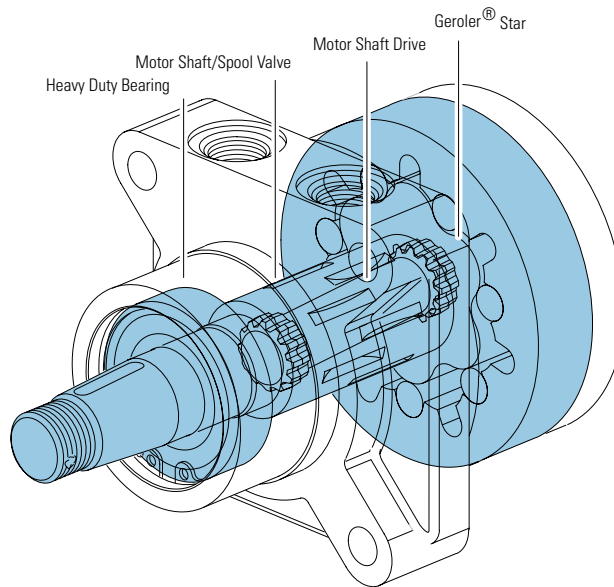

Description

Char-Lynn W Series motors with the Geroler displacement element offer the same low friction and long-life advantages as the S and T Series.

The W Series features the simplicity of Eaton's proven spool valve and a Geroler element that provides superior drive life and smooth performance. In addition, this motor has a rugged housing with an extra large capacity side load bearing.

W Series Motors

Geroler Element	7 Displacements
Flow l/min [GPM]	68 [18] Continuous***
	76 [20] Intermittent**
Speed	288 RPM
Pressure bar [PSI]	165 [2400] Cont.***
	179 [2600] Inter.**
Torque Nm [lb-in]	410 [3624] Cont.***
	562 [4970] Inter.**

*** Continuous—(Cont.) Continuous rating, motor may be run continuously at these ratings.

** Intermittent—(Inter.) Intermittent operation, 10% of every minute.

Features:

- Heavy duty bearing
- Wheel drive interface
- Three-pressure zone design (ability to reduce case pressure)
- Variety of displacements, shafts, mounts and special options
- Special options to meet customer needs

Benefits:

- High side-load capacity
- High shock load capability
- Wheel mount interface
- Compact powerful package
- High efficiency
- Smooth low-speed operation
- Extended leak-free performance

Applications:

- Scissors lifts
- Boom lifts
- Mid-size ZTR mowers
- Turf equipment
- Greens mowers
- Sand trap rakes
- Railroad maintenance equipment
- Industrial sweepers and floor polishers
- Skid steer attachments
- Many more

B-5



Scissor Lift



Sweeper




Trencher



Boom Lift

W Series (162-)

Specifications

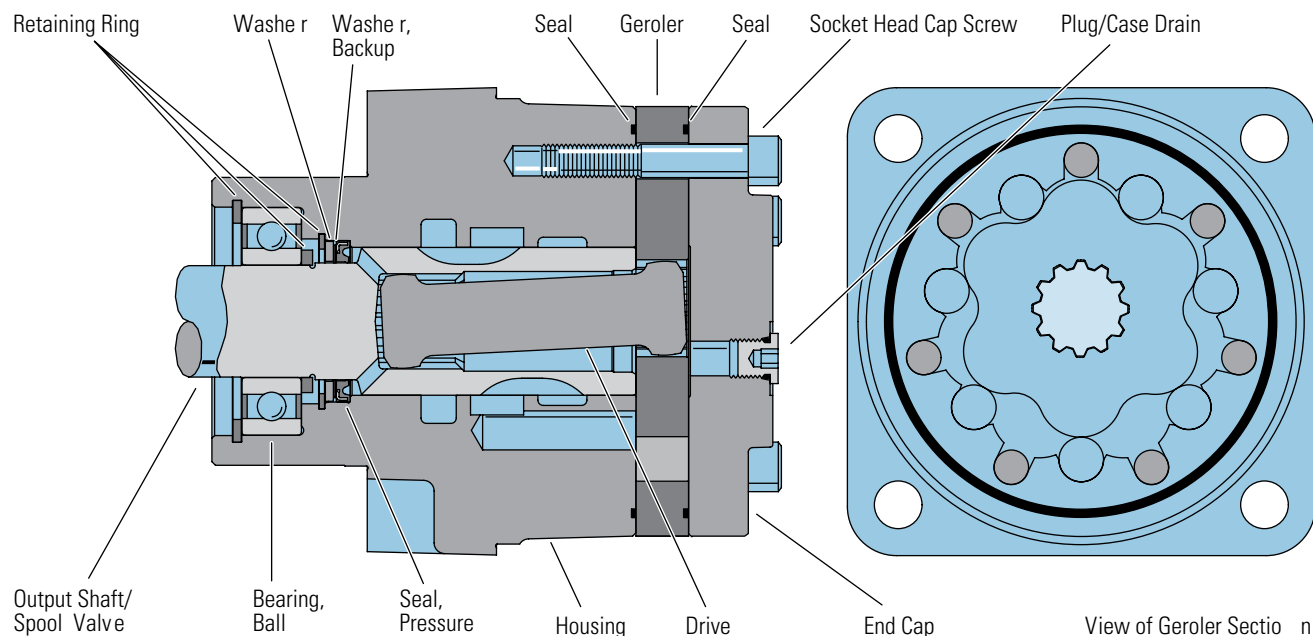

SPECIFICATION DATA – W SERIES MOTORS

Displ. cm ³ /r [in ³ /r]		80 [4.9]	126 [7.7]	154 [9.4]	195 [11.9]	251 [15.3]	303 [18.5]	374 [22.8]
Max. Speed (RPM)		267	288	214	200	200	200	200
Flow l/min [GPM]	Continuous	23 [6]	30 [8]	34 [9]	38 [10]	53 [14]	62 [16.5]	68 [18]
	Intermittent	23 [6]	30 [8]	34 [9]	38 [10]	53 [14]	62 [16.5]	76 [20]
Theo. Torque Nm [lb-in]	Continuous	176 [1555]	279 [2470]	318 [2813]	318 [2816]	375 [3319]	387 [3429]	410 [3624]
	Intermittent	189 [1676]	298 [2640]	373 [3301]	439 [3882]	548 [4849]	539 [4769]	562 [4970]
Pressure Δ bar [Δ PSI]	Continuous	165 [2400]	165 [2400]	152 [2200]	124 [1800]	110 [1600]	97 [1400]	83 [1200]
	Intermittent	179 [2600]	179 [2600]	179 [2600]	179 [2600]	165 [2400]	138 [2000]	124 [1800]

Note:

To assure best motor life, run motor for approximately one hour at 30% of rated pressure before application to full load. Be sure motor is filled with fluid prior to any load applications.

Maximum Inlet Pressure:

179 bar [2600 PSI]
Do Not Exceed Δ Pressure Rating (for displacement size see chart above).

Return Pressure (Back-Pressure):

Do not exceed Δ pressure rating (see chart above). Case drain required.

Note:

Optional version can be used without case drain.

Case Pressure:

Minimum – No Pressure
Maximum – 103 bar [1500 PSI] without case drain.

Note:

The case must be flooded when the motor is operating.

Δ Pressure:

The true Δ bar [Δ PSI] between inlet port and return port

Continuous Rating:

Motor may be run continuously at these ratings

Intermittent Operation:

10% of every minute

Recommended Fluids:

Premium quality, anti-wear type hydraulic oil with a viscosity of not less than 70 SUS at operating temperature.

Recommended System Operating Temp.:

-34°C to 82°C [-30°F to 180°F]

Recommended Filtration:

per ISO Cleanliness Code, level 20/18/13

W Series (162-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed. For best motor life select a motor to run with a torque and speed range shown in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from motor to motor in production.

	Continuous
	Intermittent

80 cm³/r [4.9 in³/r]

Δ Pressure bar [PSI]

Continuous

	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2400]	[2600]
	28	41	55	69	83	97	110	124	138	152	165	179
Flow l/min [GPM]												
[2]	[204]	[337]	[474]	[612]	[748]	[883]	[1019]	[1149]	[1281]	[1412]	[1540]	[1610]
7.6	23	38	54	69	85	100	115	130	145	160	174	182
	93	89	88	84	83	79	73	69	69	61	56	39
[4]	[223]	[357]	[489]	[627]	[769]	[902]	[1035]	[1169]	[1295]	[1424]	[1555]	[1676]
15.1	25	40	55	71	87	102	117	132	146	161	176	189
	178	172	170	168	165	159	157	154	146	142	131	117
[6]	[255]	[342]	[477]	[612]	[749]	[879]	[1014]	[1154]	[1286]	[1408]	[1533]	[1648]
22.7	29	39	54	69	85	99	115	130	145	159	173	186
	267	265	262	258	257	252	248	241	235	229	219	206

126 cm³/r [7.7 in³/r]

Δ Pressure bar [PSI]

Continuous

	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2400]	[2600]
	28	41	55	69	83	97	110	124	138	152	165	179
Flow l/min [GPM]												
[2]	[390]	[605]	[817]	[1032]	[1248]	[1448]	[1656]	[1871]	[2069]	[2243]	[2414]	[2513]
7.6	44	68	92	117	141	164	187	211	234	253	273	284
	58	56	55	51	49	45	43	41	33	32	26	17
[4]	[382]	[605]	[817]	[1036]	[1252]	[1463]	[1694]	[1908]	[2113]	[2306]	[2470]	[2640]
15.1	43	68	92	117	141	165	191	216	239	261	279	298
	113	106	106	104	93	97	94	88	82	79	74	60
[6]	[367]	[587]	[802]	[1017]	[1236]	[1444]	[1668]	[1882]	[2091]	[2284]	[2459]	[2637]
22.7	41	66	91	115	140	163	188	213	236	258	278	298
	172	167	164	161	156	152	147	141	134	130	120	103
[8]	[346]	[561]	[769]	[981]	[1203]	[1419]	[1634]	[1849]	[2039]	[2217]	[2432]	[2633]
30.3	39	63	87	111	136	160	185	209	230	250	275	297
	228	225	220	216	213	208	201	195	188	174	163	149

154 cm³/r [9.4 in³/r]

Δ Pressure bar [PSI]

Continuous

	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2400]	[2600]
	28	41	55	69	83	97	110	124	138	152	165	179
Flow l/min [GPM]												
[2]	[450]	[723]	[989]	[1249]	[1512]	[1769]	[2021]	[2269]	[2502]	[2714]	[2904]	[3019]
7.6	51	82	112	141	171	200	228	256	283	307	328	341
	47	47	46	44	40	39	36	33	30	26	19	10
[4]	[470]	[737]	[1009]	[1276]	[1540]	[1802]	[2064]	[2323]	[2570]	[2813]	[3019]	[3242]
15.1	53	83	114	144	174	204	233	262	290	318	341	366
	94	93	90	89	87	84	81	78	73	67	65	52
[6]	[435]	[715]	[984]	[1252]	[1513]	[1787]	[2020]	[2274]	[2521]	[2812]	[3042]	[3301]
22.7	49	81	111	141	171	202	228	257	285	318	344	373
	143	140	138	137	134	131	128	124	117	112	103	91
[8]	[407]	[677]	[945]	[1214]	[1477]	[1740]	[2005]	[2260]	[2503]	[2735]	[2964]	[3206]
30.3	46	76	107	137	167	197	227	255	283	309	335	362
	190	188	186	184	182	179	176	171	166	158	148	137
[9]	[380]	[648]	[914]	[1183]	[1452]	[1714]	[1981]	[2243]	[2499]	[2733]	[2964]	[3195]
34	43	73	103	134	164	194	224	253	282	309	335	361
	214	212	210	207	206	202	200	196	191	182	173	162

195 cm³/r [11.9 in³/r]

Δ Pressure bar [PSI]

Continuous

	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2400]	[2600]
	28	41	55	69	83	97	110	124	138	152	165	179
Flow l/min [GPM]												
[2]	[478]	[827]	[1171]	[1511]	[1839]	[2153]	[2452]	[2756]	[3027]	[3275]	[3513]	[3673]
7.6	54	93	132	171	208	243	277	311	342	370	397	415
	38	38	37	36	35	34	34	30	29	26	22	16
[4]	[515]	[872]	[1220]	[1558]	[1886]	[2206]	[2518]	[2816]	[3107]	[3382]	[3647]	[3882]
15.1	58	99	138	176	213	249	284	318	351	382	412	439
	75	73	73	71	70	69	66	64	62	56	52	44
[6]	[524]	[878]	[1214]	[1551]	[1875]	[2199]	[2518]	[2824]	[3113]	[3389]	[3666]	
22.7	59	99	137	175	212	248	284	319	352	383	414	
	114	111	111	110	108	106	105	103	99	95	91	
[8]	[518]	[856]	[1187]	[1524]	[1861]	[2187]	[2499]	[2782]	[3064]	[3334]		
30.3	59	97	134	172	210	247	282	314	346	377		
	151	150	150	149	147	145	144	143	141	136		
[10]	[462]	[797]	[1133]	[1468]	[1799]	[2118]	[2442]	[2739]	[3023]	[3281]		
38	52	90	128	166	203	239	276	309	342	371		
	190	188	187	186	184	184	182	179	176	160		

[3673]
415 } Torque [lb-in]
16 } Nm
Speed RPM

W Series (162-)

Performance Data

Motors run with high efficiency in all areas designated with a number for torque and speed. For best motor life select a motor to run with a torque and speed range shown in the light shaded area.

Performance data is typical at 120 SUS. Actual data may vary slightly from motor to motor in production.

 Continuous
 Intermittent

251 cm³/r [15.3 in³/r] Δ Pressure bar [PSI] Continuous												
	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1400] 97	[1600] 110	[1800] 124	[2000] 140	[2200] 152	[2400] 165	
Flow l/min [GPM]	[2] 7.6	[759] 86 30	[1194] 135 29	[1683] 190 29	[2122] 240 28	[2535] 286 27	[2928] 331 27	[3319] 375 25	[3634] 446 22	[3946] 446 17	[4242] 479 15	[4553] 514 14
	[4] 15.1	[806] 91 59	[1257] 142 58	[1691] 191 58	[2130] 241 56	[2563] 290 55	[2988] 338 55	[3381] 382 52	[3799] 429 48	[4147] 469 47	[4515] 510 41	[4849] 548 40
	[6] 22.7	[780] 88 90	[1219] 138 88	[1646] 186 87	[2084] 235 86	[2515] 284 85	[2933] 331 83	[3336] 377 83	[3716] 420 79			
	[8] 30.3	[720] 81 120	[1148] 130 118	[1590] 180 117	[2029] 229 117	[2449] 277 114	[2861] 323 112	[3236] 366 111	[3627] 410 108			
	[10] 37.9	[645] 73 148	[1080] 122 147	[1513] 171 147	[1947] 220 145	[2371] 268 145	[2779] 314 143	[3151] 356 141	[3515] 397 137			
	[12] 45.4	[557] 63 178	[992] 112 177	[1428] 161 176	[1864] 211 174	[2292] 259 174	[2697] 305 172	[3087] 349 169				
	[14] 53.0	[460] 52 208	[888] 100 206	[1330] 150 206	[1761] 199 203	[2191] 248 202	[2615] 295 200	[3035] 343 197				


		303 cm³/r [18.5 in³/r] Δ Pressure bar [PSI] Continuous								
		[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1400] 97	[1600] 110	[1800] 124	[2000] 140
Flow l/min [GPM]	[2] 7,6	[920] 104 24	[1454] 164 24	[1974] 223 24	[2480] 280 23	[2969] 335 22	[3429] 387 22	[3859] 436 20	[4230] 478 18	[4583] 518 16
	[4] 15,1	[960] 108 49	[1487] 168 49	[2007] 227 47	[2513] 284 47	[3006] 340 46	[3457] 391 45	[3905] 441 44	[4338] 490 41	[4769] 539 39
	[6] 22,7	[911] 103 73	[1445] 163 73	[1961] 222 72	[2473] 279 72	[2952] 334 71	[3411] 385 69	[3842] 434 68	[4276] 483 66	
	[8] 30,3	[843] 95 99	[1375] 155 98	[1888] 213 97	[2393] 270 96	[2886] 326 95	[3350] 379 94	[3763] 425 93		
	[10] 37,9	[752] 85 123	[1274] 144 122	[1789] 202 122	[2303] 260 120	[2792] 316 119	[3274] 370 119	[3650] 412 118		
	[12] 45	[652] 74 148	[1170] 132 147	[1691] 191 146	[2199] 248 145	[2691] 304 145	[3123] 353 144			
	[14] 53	[526] 59 172	[1039] 117 172	[1560] 176 171	[2064] 233 170	[2548] 288 169	[2999] 339 168			
	[16.5] 62	[353] 40 203	[864] 98 203	[1367] 154 201	[1876] 212 200	[2369] 268 200				

[4583]
518
16 } Torque [lb-in]
Nm
Speed RPM

374 cm³/r [22.8 in³/r] Δ Pressure bar [PSI] Continuous									
	[400] 28	[600] 41	[800] 55	[1000] 69	[1200] 83	[1400] 97	[1600] 110	[1800] 124	
Flow l/min [GPM]	[2] 7.6	[1086] 123 20	[1753] 198 19	[2365] 267 17	[2960] 334 16	[3533] 399 14	[4025] 455 12	[4484] 507 12	[4970] 562 11
	[4] 15.1	[1152] 130 39	[1797] 203 39	[2431] 275 38	[3048] 344 36	[3624] 409 34	[4129] 467 33	[4599] 520 31	
	[6] 22.7	[1099] 124 60	[1749] 198 58	[2377] 269 57	[2996] 339 56	[3557] 402 54	[4077] 461 53		
	[8] 30.3	[1018] 115 80	[1662] 188 79	[2290] 259 78	[2894] 327 76	[3440] 389 75	[3952] 447 74		
	[10] 37.9	[940] 106 100	[1582] 179 99	[2210] 250 97	[2812] 318 96	[3346] 378 95	[3816] 431 95		
	[12] 45.4	[809] 91 120	[1454] 164 119	[2077] 235 117	[2677] 302 116	[3216] 363 115			
	[14] 53.0	[648] 73 141	[1284] 145 139	[1907] 215 138	[2506] 283 137	[3033] 343 137			
	[16] 60.6	[485] 55 160	[1107] 125 159	[1722] 195 157	[2315] 262 157	[2838] 321 157			
	[18] 68.1	[307] 35 180	[930] 105 179	[1543] 174 178	[2133] 241 178				
	[20] 75.7	[111] 13 201	[730] 82 199	[1342] 152 198	[1939] 219 197				

W Series (162-)

Dimensions

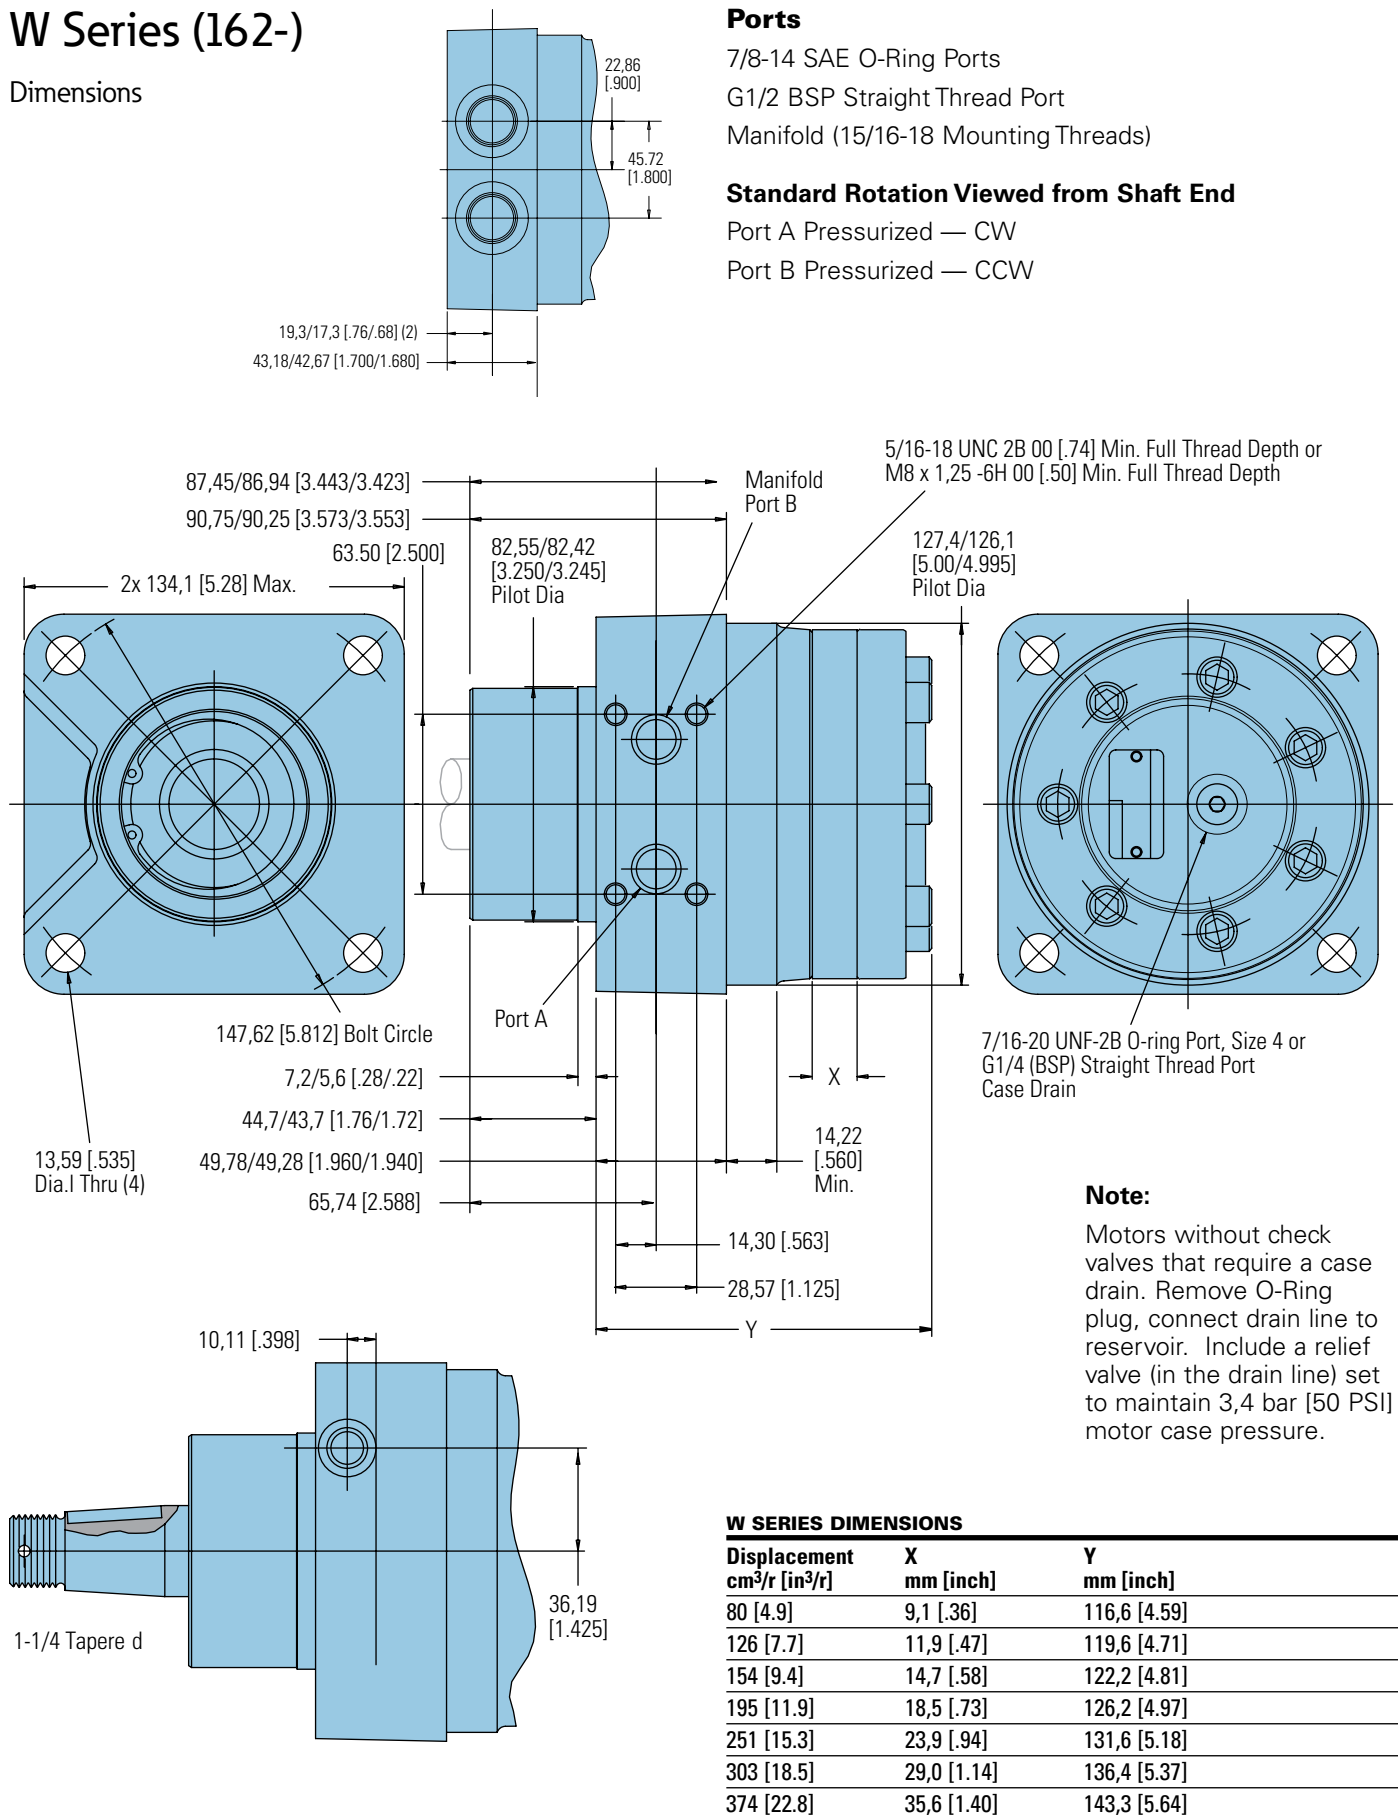

B-5

W Series (162-)

Dimensions Shafts

Recommended Torque:

(373 Nm [275 lb-ft] Dry)



(305 Nm [225 lb-ft] Lub) Plus

Torque required to align the

slotted nut with the Shaft

Crosshole.

1 1/4 Tapered

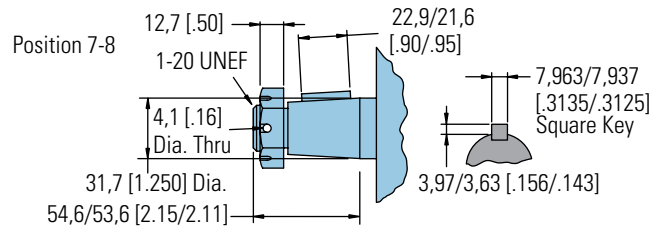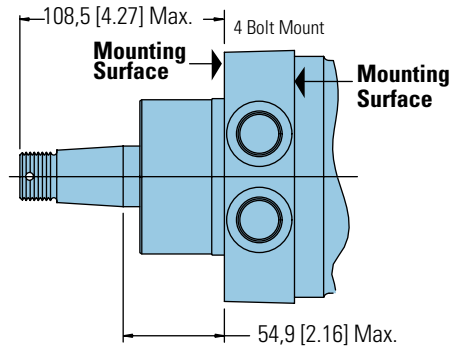

SAE J501 Standard Tapered Shaft


125,00 0,17 Taper per Meter

[1.500 .002 Taper per Foot]



768 [6800]

Max. Torque



Nm [lb-in]





1 1/4 Inch Straight

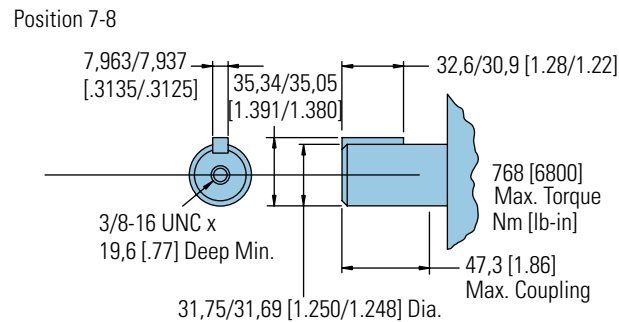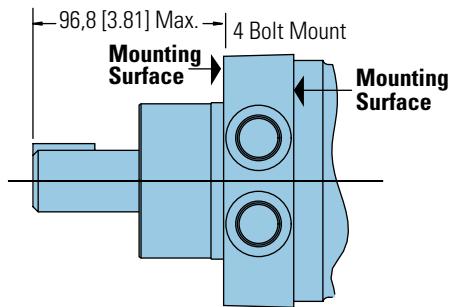

32 mm Straight

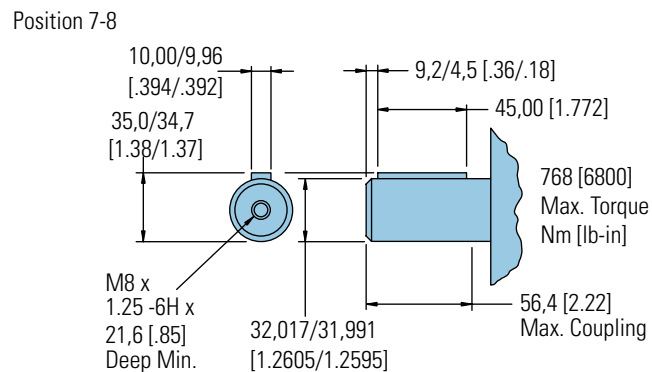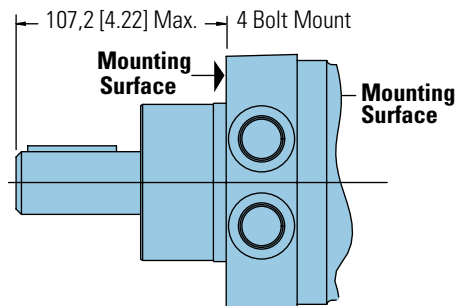

1 1/4 14 Tooth Splined

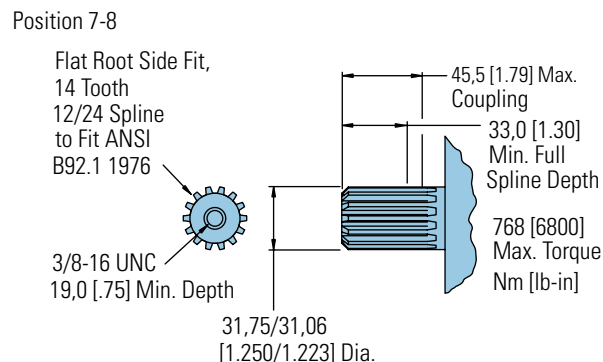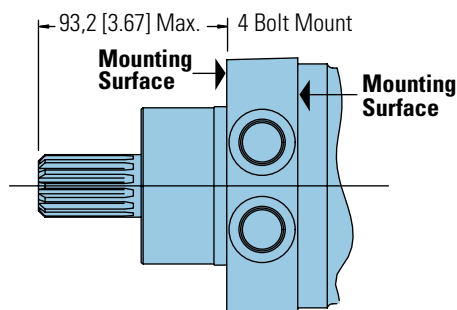

W Series (162-)

Shaft Side Load Capacity

- 1) Case pressure needs to be added to the outward axial thrust load and subtracted from inward axial thrustload – Case Pressure bar x 87, 1 [PSI x 1.35]
- 2) Life values in Chart A can be adjusted for speeds up to 200 rpm.

$$\frac{\text{Life value} \times 100 \text{ rpm}}{\text{application rpm}}$$
- 3) Shaded areas are intermittent loading.
- 4) To convert application radial load at any load location to side load at the center of keyway multiply load by the application factor from Chart B.

Example:

Side Load: 4849 N @ 120 mm [1090 lbf @ 4.75 inch] from flange.

Average Thrust Load: 890 N [200 lbf] inward (toward motor).

Case Pressure: 66 bar [960 PSI].

Average Speed: 150 rpm.

Expected Life Calculation: Adjust side load value (due to load variation): from Chart B look at 120mm [4.75 inch] read at angled curve for load adjustment factor of 1.38.
 Adjusted load is: (4849 N [1090 lbf]) x (1.38) = 6690 N [1504 lbf]

Thrust Load Value (due to case pressure):
 (960 PSI) x (1.35) = [1296 lbf]
 (66 bar) x (87,1) = 5750 N

Average thrust load found to be 890 N [200 lbf] inwards so subtract from thrust load due from case pressure:

5750 N - 890 N = 4860 N or
 [1296 lbf] - 200 lbf = [1096 lbf]

Read Life Expectancy from Chart A: Value from chart reading across top to 6672 [1500] (6090 N [1504 lbf]) and down left side to 4895 [1100] (4875 N [1096 lbf])

Life = 1800 Hours

Speed Adjustment for over 100 rpm:

$$\frac{(1800 \text{ hrs}) \times (100 \text{ rpm})}{150 \text{ rpm}} = 1200 \text{ Hours}$$

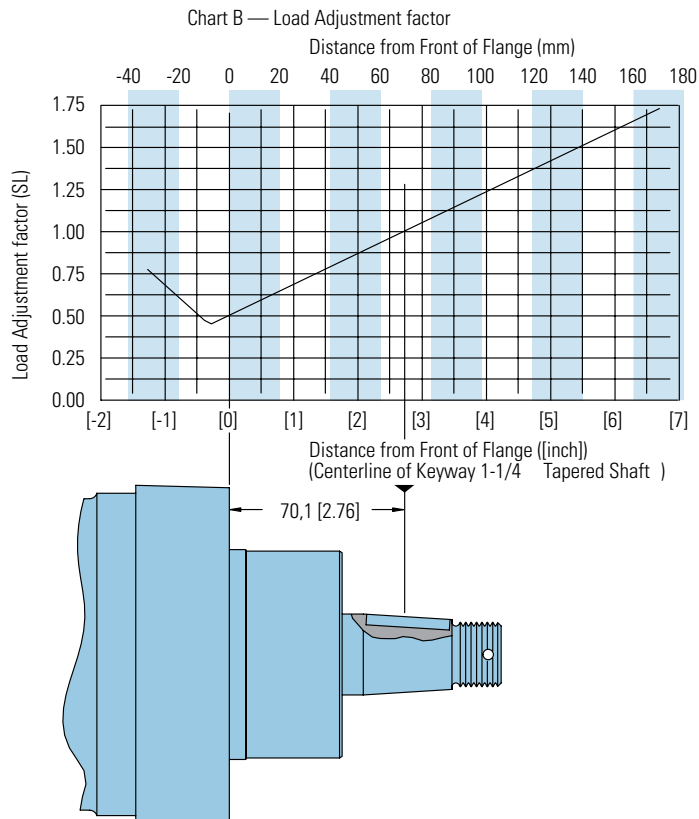



CHART A — EXPECTED B10 LIFE (HOURS) OF BEARING UNDER VARIOUS LOADS

Axial Thrust		Radial Load at Centerline of keyway at 100 RPM									
N	lbf]	1110 [250]	2225 [500]	3335 [750]	4450 [1000]	4560 [1250]	6670 [1500]	7785 [1750]	8895 [2000]	11120 N [2500lbf]	13345 N [3000lbf]
445	[100]	410 600	66 000	19 600	8 300	4 200	2 400	1 500	1 000	530	310
1335	[300]	92 700	40 900	19 600	8 300	4 200	2 400	1 500	1 000	530	310
2225	[500]	39 400	20 900	12 400	7 900	4 200	2 400	1 500	1 000	530	310
3115	[700]	21 400	12 600	8 100	5 500	3 900	2 400	1 500	1 000	530	
4005	[900]	13 300	8 400	5 700	4 000	2 900	2 200	1 500	1 000	530	
4895	[1100]	9 000	6 000	4 200	3 100	2 300	1 800	1 400	1 000		
5785	[1300]	6 500	4 500	3 200	2 400	1 900	1 500	1 200	900		
6670	[1500]	4 800	3 500	2 600	2 000	1 500	1 200	1 000			
7560	[1700]	3 700	2 800	2 100	1 600	1 300					
8450	[1900]	3 000	2 200								
8895	[2000]	Max. Thrust									

W Series (162-)

Model Code

The following 16-digit coding system has been developed to identify all of the configuration options for the W Series motor. Use this model code to specify a motor with the desired features. All 16-digits of the code must be present when ordering. You may want to photocopy the matrix below to ensure that each number is entered in the correct box.

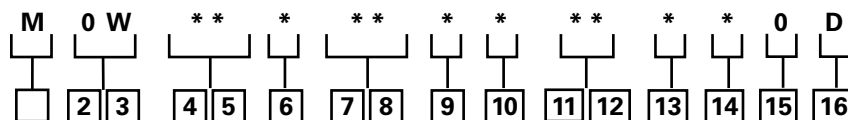

1 Product

M – Motor

2, 3 Series

0W – W Series

4, 5 Displacement cm³/r [in³/r]

05 – 30 [4.9]

08 – 126 [7.7]

09 – 154 [9.4]

12 – 195 [11.9]

15 – 251 [15.3]

19 – 303 [18.5]

23 – 374 [22.8]

6 Mounting Type

B – 4 Bolt (Wheel) 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 147,6 [5.81] Dia., B.C., 127,0 [5.00] rear pilot

7, 8 Output Shaft

02 – 1 1/4 inch Dia. Flat Root Side Fit, 14 Tooth, 12/24 DP 30° Involute Spline with 3/8-16 UNC-2B Thread in End, 33,0 [1.30] Min. Full Spline

03 – 1 1/4 inch Dia. .125:1 Tapered Shaft Per SAE J501 with 1– 20 UNEF -2A Threaded Shaft End and Slotted Hex Nut, 7,938 [.3125] Square x 22,22 [.875] Straight Key

04 – 32mm Dia. Straight Shaft with M8 x 1, 25-6H Thread in End, 9,982 [.3930] Wide x 7,995 [.3132] High x 45,00 [1.772] Long Key

06 – 1 1/4 inch Dia. Straight Shaft with 3/8 – 16 UNC 2B Thread in End, 7,938 [.3125] Square x 34,92 [1.375] Straight Key

9 Ports

A – 7/8 -14 UNF - 2B SAE O-Ring Port

B – G 1/2 (BSP) Straight Thread Port

10 Case Flow Options

A – 7/16 - 20 UNF - 2B SAE O-Ring Port

B – G 1/4 (BSP) Straight Thread Port

C – Internal Check Valve

11, 12 Special Features (Hardware)

00 – None

01 – Viton Seals

13 Special Features (Assembly)

0 – None

1 – Reverse Rotation

14 Paint/Special Packaging

0 – No Paint, Individual Box

A – Low Gloss Black Primer, Bulk Box Option

15 Eaton Assigned Code when Applicable


0 – Assigned Code

16 Eaton Assigned Design Code

D – Assigned Design Code

W Series with Parking Brake (162-)

Dimensions



Ports


7/8 -14 UNF 2B SAE O-Ring Ports (2) or
G 1/2 (BSP) Straight Thread

Standard Rotation Viewed from Shaft End

Port A Pressurized — CW


Port B Pressurized — CCW

Port Dimensions

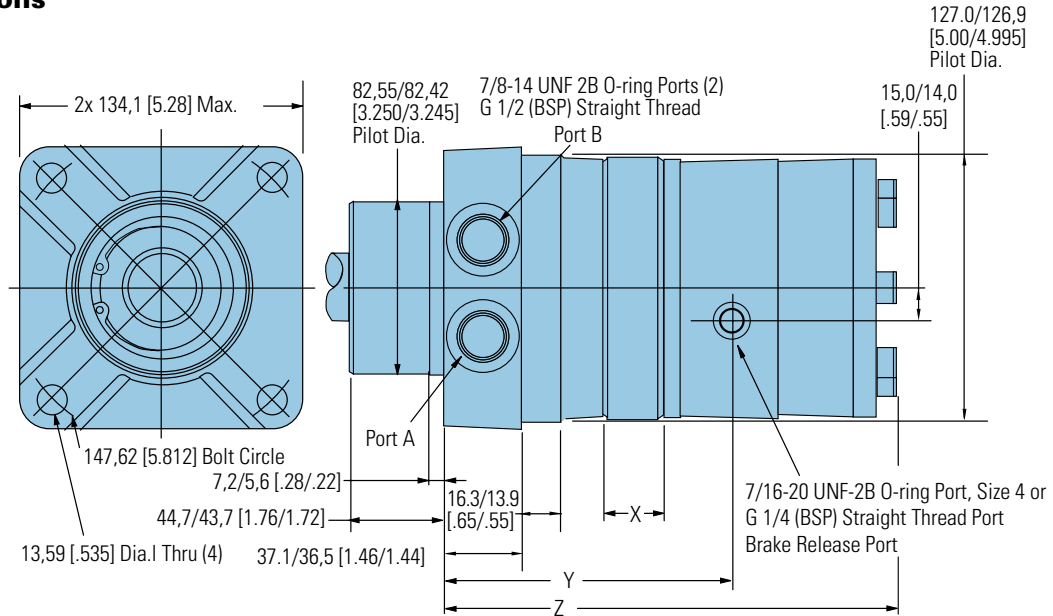

B-5

Mounting Dimensions

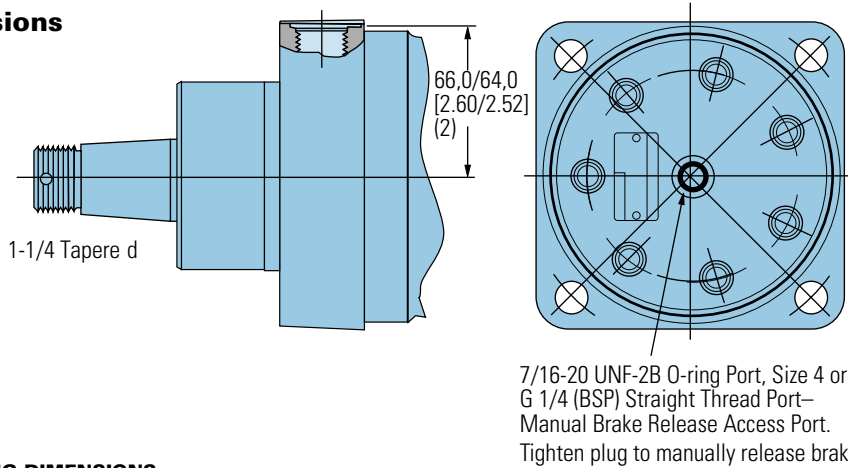

PORTING AND MOUNTING DIMENSIONS

Displacement cm ³ /r [in ³ /r]	X mm [inch]	Y mm [inch]	Z mm [inch]
80 [4.9]	9,1 [0.36]	119,9 [4.72]	198,4 [7.81]
126 [7.7]	11,9 [0.47]	122,9 [4.84]	201,2 [7.92]
154 [9.4]	14,7 [0.58]	125,5 [4.94]	204,0 [8.03]
195 [11.9]	18,5 [0.73]	129,6 [5.10]	207,8 [8.18]
251 [15.3]	23,9 [0.94]	134,9 [5.31]	213,4 [8.40]
303 [18.5]	29,0 [1.14]	139,7 [5.50]	217,7 [8.59]
374 [22.8]	35,6 [1.40]	146,6 [5.77]	226,8 [8.85]

SPECIFICATIONS

Brake Release Pressure 205 bar [3000 PSI] Max.; 15 bar [250 PSI] Min.

W Series, W Series with Parking Brake (162-)

Product Numbers

Use digit prefix —
162 plus four digit number
from charts for complete
product number —
Example 162-1153.

**Orders will not be accepted
without three digit prefix.**

Standard

SHAFT	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER						
	80 [4.9]	126 [7.7]	154 [9.4]	195 [11.9]	251 [15.3]	303 [18.5]	374 [22.8]
Standard	162-1016	-1017	-1018	-1019	-1020	-1021	-1022
w/Case Drain	162-1023	-1024	-1025	-1009	-1008	-1026	-1027

162-1009

W Series with Parking Brake

SHAFT	DISPL. cm ³ /r [in ³ /r] / PRODUCT NUMBER						
	80 [4.9]	126 [7.7]	154 [9.4]	195 [11.9]	251 [15.3]	303 [18.5]	374 [22.8]
Standard	162-1143	-1144	-1145	-1146	-1183	-1148	-1149

162-1146

Note:


All above motors have
1-1/4 inch tapered output
shaft, 7/8 inch O-Ring Ports,
internal check valves.

For W Series Motors with
a configuration not shown
in the chart above: Use the
model code number system
to specify the product in
detail. (see page B-5-8
and use the model code
supplement shown on page
B-5-11 for spring-applied
hydraulic-release parking
brake).

W Series with Parking Brake (162-)

Model Code

The following 16-digit coding system has been developed to identify all of the configuration options for the W motor. Use this model code to specify a motor with the desired features. All 16-digits of the code must be present when ordering. You may want to photocopy the matrix below to ensure that each number is entered in the correct box.



1 Product

M – Motor

2, 3 Series

0W – W Series with Parking Brake

4, 5 Displacement cm³/r [in³/r]

05 – 30 [4.9]

08 – 126 [7.7]

09 – 154 [9.4]

12 – 195 [11.9]

15 – 251 [15.3]

19 – 303 [18.5]

23 – 374 [22.8]

6 Mounting Type

B – 4 Bolt (Wheel) 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 147,6 [5.81] Dia., B.C., 127,0 [5.00] rear pilot

7, 8 Output Shaft

02 – 1 1/4 inch Dia. Flat Root Side Fit, 14 Tooth, 12/24 DP 30° Involute Spline with 3/8-16 UNC-2B Thread in End, 33,0 [1.30] Min. Full Spline

03 – 1 1/4 inch Dia. .125:1 Tapered Shaft Per SAE J501 with 1– 20 UNEF -2A Threaded Shaft End and Slotted Hex Nut, 7,938 [.3125] Square x 22,22 [.875] Straight Key

04 – 32mm Dia. Straight Shaft with M8 x 1, 25-6H Thread in End, 9,982 [.3930] Wide x 7,995 [.3132] High x 45,00 [1.772] Long Key

06 – 1 1/4 inch Dia. Straight Shaft with 3/8 – 16 UNC 2B Thread in End, 7,938 [.3125] Square x 34,92 [1.375] Straight Key

9 Ports

A – 7/8 -14 UNF - 2B SAE O-Ring Port

B – G 1/2 (BSP) Straight Thread Port

10 Case Flow Options

A – 7/16 - 20 UNF - 2B SAE O-Ring Port

B – G 1/4 (BSP) Straight Thread Port

C – Internal Check Valve

11, 12 Special Features (Hardware)

00 – None

01 – Viton Seals

11 – Spring-applied hydraulic-release brake

13 Special Features (Assembly)

0 – None

1 – Reverse Rotation

14 Paint/Special Packaging

0 – No Paint, Individual Box

A – Low Gloss Black Primer - Individual Box

15 Eaton Assigned Code when Applicable

0 – Assigned Code

16 Eaton Assigned Design Code

D – Assigned Design Code

B-5